

COMMERCIAL LINE R32

Monosplit



HOAIDO

Experience makes technology

COMMERCIAL LINE R32



SPLIT SYSTEMS FEATURES

Hokkaido's Split systems ensure high standards of comfort, silence, and energy efficiency. A wide range of indoor units, suitable for any installation requirement.



compact
design



computerised
defrost



low
acoustic
impact



24h
timer



dehum.



outside
air



easy
installation



wired
remote
control



remote
control



(optional)



(optional)



(optional)



(optional)




HTFU 351-531 ZAL



Pre-cut for external air inlet



8-WAYS TFP 200 ZA panel with
360° air diffusion

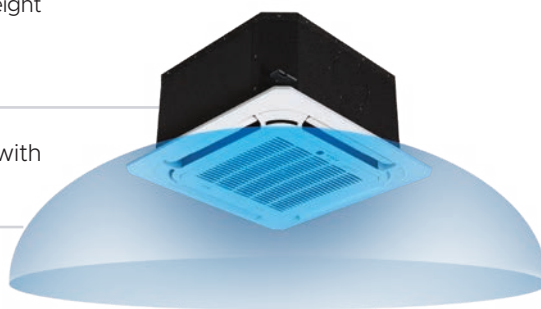

Remote control included as standard

Indoor unit / Outdoor unit	Rated capacity cooling - heating (kW)	Rated absorbed power cool. - heat. (kW)	SEER / SCOP	Power supply O.U. (Ph-V-Hz)	Sound pressure level I.U. / O.U. (Hi/Mi/Lo/UoLo)	Dimensions mm (WxDxH)/ Net weight (kg) I.U.	Dimensions mm (WxDxH)/ Net weight (kg) O.U.
HTFU 351 ZAL / HCKI 351 ZA-1	3.52 - 3.81	1.01 - 1.02	6.60 - A++ / 4.10 - A+	1 - 220/240 - 50	42/37.5/34.5 / 53.6 [dB(A)]	570x570x260 / 16.3	765x303x555 / 26.6
HTFU 531 ZAL / HCKI 531 ZA-1	5.28 - 5.18	1.63 - 1.38	6.30 - A++ / 4.00 - A+	1 - 220/240 - 50	45.4/44/39 / 56 [dB(A)]	570x570x260 / 16.5	805x330x554 / 32.5

8-WAYS SLIM CASSETTE 84x84

HTBI 711-1081-1401-1601 ZA



SOPHISTICATED DESIGN

The 8-ways cassette type unit for suspended ceilings combine exceptional features with a sophisticated design.

8-ways TBP 711 ZA panel

Condensate drain pump included with possibility of raising the discharge up to 750 mm from the lower height

Pre-cut for external air inlet



PERFORMANCE

-15~50°C
in cooling

A++
in cooling

-15~24°C
in heating

A+
in heating



Remote control included as standard

Indoor unit / Outdoor unit	Rated capacity cooling - heating (kW)	Rated absorbed power cool. - heat. (kW)	SEER / SCOP	Power supply O.U. (Ph-V-Hz)	Sound pressure level I.U. / O.U. (Hi/Mi/Lo/ULo)	Dimensions mm (WxDxH) / Net weight (kg) I.U.	Dimensions mm (WxDxH) / Net weight (kg) O.U.
HTBI 711 ZA / HCKI 711 ZA-1	7.03 - 7.62	2.32 - 1.90	6.20 - A++ / 4.00 - A+	1 - 220/240 - 50	50/47.5/42 / 60 [dB(A)]	830x830x205 / 21.6	890x342x673 / 43.9
HTBI 1081 ZA / HCSI 1081 ZA-1	10.55 - 11.14	4.00 - 3.00	6.40 - A++ / 4.00 - A+	3 - 380/415 - 50	51/49/46 / 63 [dB(A)]	830x830x245 / 27.2	946x410x810 / 80.5
HTBI 1401 ZA / HCSI 1401 ZA-1	14.07 - 16.12	4.65 - 4.58	6.10 - A++ / 4.00 - A+	3 - 380/415 - 50	52.5/50.5/48 / 63.5 [dB(A)]	830x830x287 / 29.3	952x415x1333 / 103.7
HTBI 1601 ZA / HCSI 1601 ZA-1	15.24 - 18.17	5.00 - 5.55	6.30 - A++ / 4.00 - A+	3 - 380/415 - 50	54.5/52/49.5 / 64 [dB(A)]	830x830x287 / 29.3	952x415x1333 / 107

CONSOLE

HFIU 351-501 ZAL



NEW

PERFORMANCE AND COMFORT

The new Hokkaido Console indoor unit was designed to provide best functionality combined with a pleasant and modern look. Thanks to the diversified air flows these indoor units allow to obtain a high level of thermal comfort in your room.

Extremely thin with only 200 mm depth



Wi-Fi
optional



Remote
control
included as
standard

NEW *

Indoor unit / Outdoor unit	Rated capacity cooling - heating (kW)	Rated absorbed power cool. - heat. (kW)	SEER / SCOP	Power supply O.U. (Ph-V-Hz)	Sound pressure level I.U. / O.U. (Hi/Mi/Lo)	Dimensions mm (WxDxH)/ Net weight (kg) I.U.	Dimensions mm (WxDxH)/ Net weight (kg) O.U.
HFIU 351 ZAL / HCKI 351 ZA-1	3.52 - 3.81	1.00 - 0.98	7.30 - A++ / 4.00 - A+	1 - 220/240 - 50	37/34/27 / 54	794x200x621 / 14.9	765x303x555 / 26.6
HFIU 501 ZAL / HCKI 531 ZA-1	4.98 - 5.28	1.50 - 1.42	6.70 - A++ / 4.00 - A+	1 - 220/240 - 50	41/38/32 / 55	794x200x621 / 14.9	805x330x554 / 32.5

*** Arriving in Spring 2023**

PERFORMANCE

-15~50°C
in cooling

A++
in cooling


-15~24°C
in heating

A+
in heating

MEDIUM STATIC PRESSURE DUCTED

HUCU 351-531 ZAL

HUCI 711-1081-1401-1601 ZA

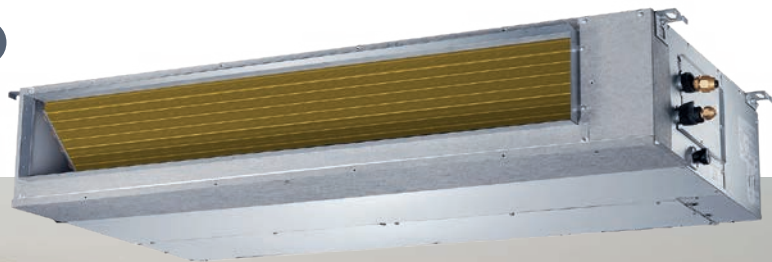

RELIABLE AND DISCRETE

The Hokkaido Ducted systems combine first class features with a plain design for easy installation and maintenance.

Condensate drain pump included with possibility of raising the discharge up to 750 mm from the lower height

100-160 Pa Automatic adjustment of the head of the fan at constant flow rate

PERFORMANCE

-15~50°C
in cooling

A++
in cooling

-15~24°C
in heating

A+
in heating



Wi-Fi
optional

Compatible with systems **AIRZONE**



Wired remote control
included as standard

Indoor unit / Outdoor unit	Rated capacity cooling - heating (kW)	Rated absorbed power cool. - heat. (kW)	SEER / SCOP	Power supply O.U. (Ph-V-Hz)	Sound pressure level I.U. / O.U. (Hi/Mi/Lo/ULo)	Dimensions mm (WxDxH) / Net weight (kg) I.U.	Dimensions mm (WxDxH) / Net weight (kg) O.U.
HUCU 351 ZAL / HCKI 351 ZA-1	3.52 - 3.81	1.05 - 1.03	6.30 - A++ / 4.00 - A+	1 - 220/240 - 50	34.5/32/30 / 53.6 [dB(A)]	700x506x200 / 17.8	765x303x555 / 26.6
HUCU 531 ZAL / HCKI 531 ZA-1	5.28 - 5.57	1.53 - 1.50	6.50 - A++ / 4.00 - A+	1 - 220/240 - 50	42/39/35 / 56 [dB(A)]	880x674x210 / 24.4	805x330x554 / 32.5
HUCI 711 ZA / HCKI 711 ZA-1	7.03 - 7.62	2.19 - 1.90	6.20 - A++ / 4.00 - A+	1 - 220/240 - 50	49/46/41 / 60 [dB(A)]	1100x774x249 / 32.3	890x342x673 / 43.9
HUCI 1081 ZA / HCSI 1081 ZA-1	10.55 - 11.72	4.00 - 3.25	6.10 - A++ / 4.00 - A+	3 - 380/415 - 50	50.5/49/47 / 63 [dB(A)]	1360x774x249 / 40.5	946x410x810 / 80.5
HUCI 1401 ZA / HCSI 1401 ZA-1	14.07 - 16.12	4.80 - 4.50	6.10 - A++ / 4.00 - A+	3 - 380/415 - 50	51.5/49/47 / 63.5 [dB(A)]	1200x874x300 / 47.4	952x415x1333 / 103.7
HUCI 1601 ZA / HCSI 1601 ZA-1	15.24 - 18.17	5.25 - 5.15	6.10 - A++ / 4.00 - A+	3 - 380/415 - 50	52.5/49/47 / 64 [dB(A)]	1200x874x300 / 47.6	952x415x1333 / 107


CEILING/FLOOR

HSFU 531 ZAL

HSFI 711-1081-1401-1601 ZA1



TWO WAYS OF INSTALLATION

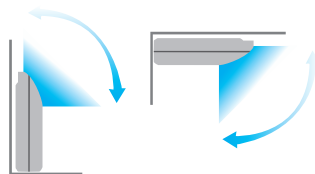

New design stylish.

The wide air distribution louver with aerodynamic flaps ensure fast and silent operation.

PERFORMANCE

-15~50°C
in cooling

A++
in cooling

-15~24°C
in heating

A+
in heating



Remote control included as standard

Indoor unit / Outdoor unit	Rated capacity cooling - heating (kW)	Rated absorbed power cool. - heat. (kW)	SEER / SCOP	Power supply O.U. (Ph-V-Hz)	Sound pressure level I.U. / O.U. (Hi/Mi/Lo/ULo)	Dimensions mm (WxDxH) / Net weight (kg) I.U.	Dimensions mm (WxDxH) / Net weight (kg) O.U.
HSFU 531 ZAL / HCKI 531 ZA-1	5.28 - 5.57	1.45 - 1.50	6.20 - A++ / 4.00 - A+	1 - 220/240 - 50	44/41/37 / 56 [dB(A)]	1068x675x235 / 28	805x330x554 / 32.5
HSFI 711 ZA1 / HCKI 711 ZA-1	7.03 - 7.62	2.30 - 2.05	6.10 - A++ / 4.00 - A+	1 - 220/240 - 50	51/47/43 / 60 [dB(A)]	1068x675x235 / 28	890x342x673 / 43.9
HSFI 1081 ZA1 / HCKI 1081 ZA-1	10.55 - 11.72	4.00 - 3.35	6.40 - A++ / 4.10 - A+	3 - 380/415 - 50	51/47.5/45 / 63 [dB(A)]	1650x675x235 / 41.5	946x410x810 / 80.5
HSFI 1401 ZA1 / HCKI 1401 ZA-1	14.07 - 16.12	5.00 - 5.10	6.10 - A++ / 4.00 - A+	3 - 380/415 - 50	53/50/46 / 63.5 [dB(A)]	1650x675x235 / 41.7	952x415x1333 / 103.7
HSFI 1601 ZA1 / HCKI 1601 ZA-1	15.83 - 18.17	5.65 - 6.05	6.10 - A++ / 4.00 - A+	3 - 380/415 - 50	55/52/48 / 64 [dB(A)]	1650x675x235 / 42.3	952x415x1333 / 107



HOKKAIDO srl Tel. +39 051 4133 111
Via della Salute 14 Fax +39 051 4133 112
40132 Bologna Italy **www.hokkaido.it**



Discover our
whole product
range