

# 25<sup>20</sup> YEARS GENERAL CATALOGUE HOKKAI

Experience makes technology

[hokkaido.it](http://hokkaido.it)





# GENERAL CATALOGUE HOKKAIDO **2025**

Hokkaido, a leading brand in the air conditioning market in Italy and Europe, stands out for its ability to support every supply request and satisfy the most demanding customers. Hokkaido is a brand of Termal Sales, a company of the Termal Group.

Proprietary brand products are known for their excellent value for money and reliability in use.

The depth of the range, the pre- and post-sales services, and the logistics management are the strong points of Hokkaido.



# TECHNOLOGY AND PROFESSIONALISM **AT YOUR SERVICE**

Hokkaido stands for reliable products with a high quality-price ratio.

Air conditioning systems that stand out for savings and efficiency, in line with the regulations and needs of the new energy transition.

A wide range of styles and capacities to suit the needs of every environment.







# EXPERIENCE MAKES **TECHNOLOGY**

## OVER TWENTY YEARS OF EXPERIENCE

**The Hokkaido brand is a leader in Italy and Europe in the air conditioning sector for residential, commercial and industrial applications, its success has been built step by step in over twenty years of activity.**

The origins of the Hokkaido brand date back to the end of 1998, the year in which the Termal Group began distributing a selection of products for residential air conditioning, whose **affordable** value was strongly perceived by the market. The distribution of Hokkaido products immediately had a widespread development throughout Italy, through the channel of professional installers and the national network of consumer electronics stores.

## AN INTERNATIONAL REALITY

Since the early 2000s, the international network of dealers and distributor partners has developed rapidly, thanks above all to the variety and reliability of the services offered, which has allowed the Hokkaido brand to develop brilliantly on international markets.




A photograph of a white Hokkaido outdoor air conditioning unit. The unit features a large circular fan grille on the left and a control panel on the right with the 'HOKKAIDO' logo. In the background, a larger, semi-transparent version of the same unit is visible.

HOKKAIDO

KK

# HOKKAIDO, **MORE AND MORE**

- *Wide range*
- *Advantageous quality/price ratio*
- *Integrated logistics*
- *Fast deliveries throughout the EU*
- *Huge assortment of spare parts and accessories that can be ordered online and are available within 24 hours*

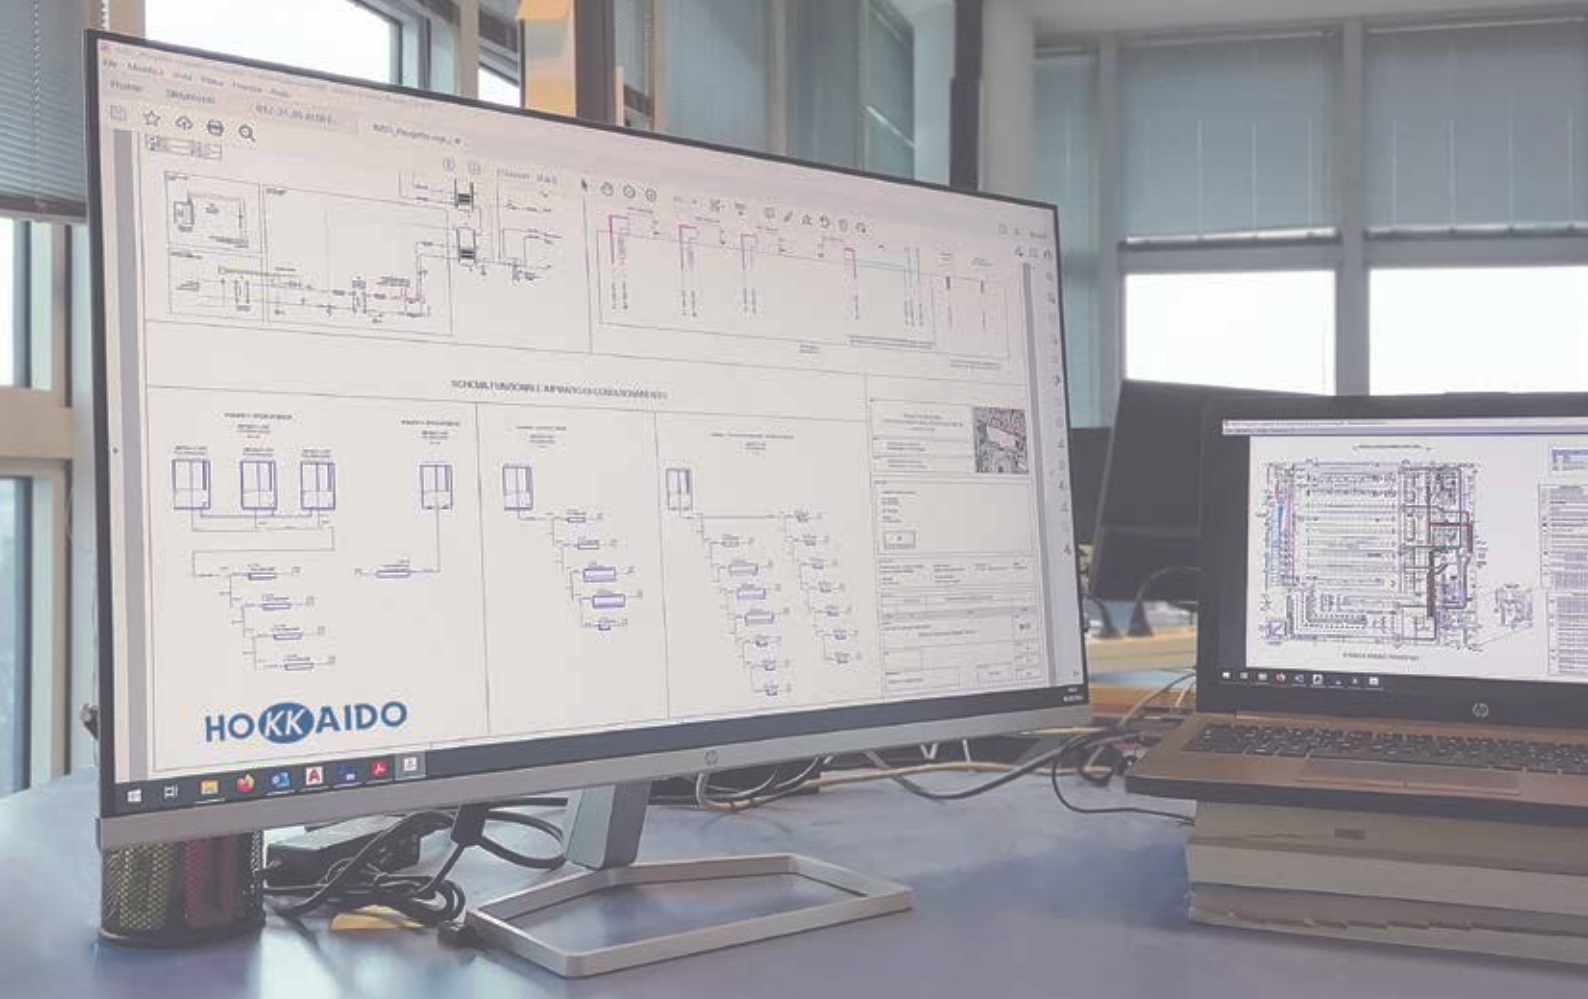

# ASSISTANCE & **DESIGN**

## THE CUSTOMER AT THE CENTER OF THE PROJECT

Through a specialized group of technicians, Hokkaido provides technical and design consultancy on its products.

Our technicians are a point of reference for advice on:

- system sizing;
- installation and functionality;
- quotes.

Estimates and design are carried out with specific software, which optimize system efficiency and installation costs.





# THE DISTRIBUTORS NETWORK

## HOKKAIDO DISTRIBUTORS NETWORK

Hokkaido products are distributed by Termal Sales on the Italian and international markets through specialized distribution networks, with an integrated logistics service.

Hokkaido has all the experience and network of resources needed to offer versatile and high-tech heating, cooling and domestic hot water solutions.

Visit the official website **[www.hokkaido.it](http://www.hokkaido.it)**



# ADVANCED LOGISTICS

## SPARE PARTS ONLINE AVAILABLE IN 24 HOURS

The success of the brand comes from the great attention to customer needs, with particular reference to the logistics organization, which has always been a point of excellence of the Termal Group: rapid deliveries throughout the community, a vast assortment of spare parts and accessories that can be ordered online and available in 24 hours. All this allows customers great operational and commercial flexibility and strong competitiveness in the presence of the various local markets.

## OUR HEADQUARTERS

The headquarters of Termal Sales is in Bologna, at the operational center of Termal Group. A modern complex (4,000 square meters of offices and 4,500 square meters of area for product storage) is the operational hub of commercial, logistics and administrative activities.

This center also brings together technical-commercial assistance and training activities, managed directly to ensure high quality standards. The plant, built in a strategic position with respect to the airport and the motorway junction, is constructed according to the most modern architectural concepts for logistics.



# PROFESSIONAL TRAINING

## PROFESSIONAL TRAINING AND DEVELOPMENT

Hokkaido's technical sales staff believes that the training area is very important for the professional growth of its customers. For this purpose, it organizes training modules for learning, updating and technical improvement.

The Academy Center, at the Bologna headquarters, consists of classrooms dedicated to theoretical demonstration and practical lessons, equipped with working products and related control tools. The courses are structured for the installation, assistance and maintenance needs of residential, commercial, VRF and hydronic systems.

The training offer is always updated based on the new range, the technological evolution of the products and the regulatory adjustments of the sector:

- refrigerant circuit;
- installation issues;
- fault diagnosis;
- assistance;
- design of variable capacity systems;
- using XRV system sizing software.

At the end of each course, participants receive a certificate of attendance and handouts relating to the technical topics covered.



# DETRAZIONI FISCALI BONUS CASA, ECOBONUS E CONTO TERMICO 2.0



**RISPARMIO**  
Ristrutturazione  
Edilizia (50% o 36%)



**INNOVAZIONE**  
Riqualficazione  
Energetica (50 o 36%)



**SOSTENIBILITÀ**  
Conto Termico  
2.0

Cos'è

È un'agevolazione fiscale dedicata agli interventi di ristrutturazione edilizia e alle attività di manutenzione straordinaria finalizzati al **risparmio energetico**, come l'installazione di una pompa di calore.

Si tratta di una detrazione IRPEF, in funzione degli scaglioni di reddito, con detrazione per l'anno 2025 pari al 50% delle spese sostenute per abitazioni principali e al 36% per le seconde case.

Il bonus risparmio energetico, noto anche come Ecobonus, consente ai contribuenti di beneficiare di una detrazione IRPEF/IRES relativa alle spese sostenute per migliorare l'efficienza energetica della propria casa.

In particolare, **l'agevolazione è concessa quando si eseguono interventi che aumentano il livello di efficienza energetica degli edifici esistenti.**

È un'agevolazione dedicata a chi vuole migliorare l'efficienza energetica della propria casa. In particolare, questo bonus **incentiva la produzione di energia da fonti rinnovabili** in impianti di piccole dimensioni. Tanta più energia rinnovabile è utilizzata per riscaldare casa, tanto è maggiore il contributo ricevuto. È possibile usufruire di un rimborso fino al 65% dei costi totali sostenuti direttamente sul conto corrente.

Soggetti	Persone		
	Condomini		
Come lo ottengo?	Titolari d'impresa o di reddito agrario		
	Amministrazioni pubbliche		
Come lo ottengo?	Detrazione IRPEF	Detrazione IRPEF o IRES	Rimborso su conto corrente
Tempistiche di pagamento?	10 anni		Entro 60 gg se <€ 5.000 - da 2 a 5 anni in base all'intervento se >€ 5.000
Come si calcola	% su costi totali prodotti + manodopera + materiale + consulenza		Fissato dalle caratteristiche del prodotto
Valore percentuale	50-36% per il 2025		Funzione delle caratteristiche del prodotto, fino al 65%
PRODOTTI	RISPARMIO ENERGETICO	ALTA EFFICIENZA	ENERGIA RINNOVABILE
Condizionatore in pompa di calore	✓	✓	✓
Pompa di calore aria-acqua	✓	✓	✓
Scaldacqua in pompa di calore	✓	✓	✓

Nota: i parametri possono subire variazioni in base agli aggiornamenti delle normative vigenti.

## QUALE INCENTIVO PER LE POMPE DI CALORE

Di quali incentivi si può usufruire in caso di installazione di una pompa di calore ad aria o ad acqua?

Generatore sostituito	Generatore installato	Ristrutturazione edilizia	Riqualficazione energetica	Conto Termico 2.0
Nessuno	Pompa di calore	✓		
Caldaia	Pompa di calore	✓	✓	✓
Pompa di calore	Pompa di calore	✓	✓	✓
Caldaia + Pompa di calore	Pompa di calore	✓	✓	✓

## LO SAPEVI?

- ✓ Il bonus Ristrutturazione Edilizia incentiva non solo la ristrutturazione ma anche la **nuova installazione** di una pompa di calore: usala non solo d'estate ma anche per riscaldare casa nelle mezze stagioni, risparmi energia e contribuisce al rispetto dell'ambiente.

**FOR ITALIAN  
MARKET ONLY**

## GENERAL CONTENTS **2025**

- 13** RESIDENTIAL & COMMERCIAL R32
- 43** RESIDENTIAL MULTISPLIT COMBINATIONS
- 49** HEATING
- 61** CONTROLS



A modern interior space featuring a light-colored wooden floor, a dark kitchen island with a white countertop, and large windows. A dark wooden bench is positioned under the island. A dark wooden shelf is visible on the left. A dark wooden cabinet is visible on the right. A dark wooden bench is positioned under the island. A dark wooden shelf is visible on the left. A dark wooden cabinet is visible on the right.

# KK

## RESIDENTIAL & COMMERCIAL R32



# RESIDENTIAL & COMMERCIAL R32, WELLBEING FOR YOUR HOME

The most demanding customers, attentive to technological evolution, the benefits that derive from it and respect for the environment, will find a concrete answer in the new line, which offers a choice in line with the needs and evolutions of the market.

- 16** Line-up
- 17** Incentives

## MONOSPLIT

- 18** Mono and Multi wall models
- 22** LUMINA Wall
- 24** AIKO Wall
- 26** AIKO S Wall
- 28** Compact Cassette
- 30** Slim Cassette
- 32** Ducted medium static pressure
- 34** Console
- 36** Floor/Ceiling

## MULTISPLIT

- 39** Line up
- 40** Outdoor units
- 41** Indoor units
- 43** COMBINATIONS

# R32 WELLBEING FOR PEOPLE AND PLANET

## ADVANTAGES OF R32

Nowadays, environmental protection is considered of primary importance by both the user and the professional. Choosing an air conditioner with R32 refrigerant allows you to obtain excellent comfort in both cooling and heating, reducing polluting emissions.

The most relevant aspect of R32 gas is its GWP value, equal to 675, which allows the creation of systems containing up to 7.4 kg of gas without exceeding the threshold that requires leak control and keeping an equipment register, a threshold that for an R410A gas is already exceeded by 2.4 kg of gas.

- it's eco-friendly;
- **it is non-toxic;**
- it is slightly flammable;
- it is not harmful and does not pose a risk to the ozone layer;
- it is very efficient.

## WHY CHOOSE R32

The specific name of R32 gas is difluoromethane. It is currently present among the fluorinated gases with a low GWP value, equal to 675.

There is no obligation to replace R410A gas, which therefore remains regularly on the market, except in monosplit applications with refrigerant < 3 kg where, from 2025, the use of gas with GWP < 750 will be mandatory for new installations.

There are some limitations in particular conditions of use that must be considered in accordance with the regulations in force.

## STORAGE, STANDARDS AND DESIGN

When storing units containing R32, it may be necessary, based on the quantities stored, to review the Fire Prevention Certificate (DPR 151/2011) to ensure the validity of your insurance guarantee. The transport of dangerous goods is regulated by D.GLS 35/2010. R32 has been classified as slightly flammable by ISO 817 and as such has no stringent limitations in road transport (current ADR), maintaining strict regulations in maritime transport (current IMDG) and aeronautical transport (current IATA).

The EN 378:2016 standard also regulates the applications of appliances that use R32 gas; the maximum concentration limits of the gas in residential applications must always be verified with particular attention to multisplit systems that can potentially concentrate (in the event of leaks) high quantities of refrigerant in small environments. **R32 gaz is heavier than air and in the event of a leak it accumulates at the bottom;** therefore, indoor units follow different regulatory parameters depending on the type of application.

Installation in public buildings is regulated by specific regulations relating to the application of appliances with flammable gases, such as: hotels DM 09/04/1994, shopping centres DM 27/07/2010, buildings for entertainment DM 19/08/1996, hospitals DM 18/09/2012, schools DM 26/08/1992, offices DM 22/02/2006, children's games DM 16/07/2014, airports DM 07/07/2014, interports DM 18/07/2014.

**The design, installation and maintenance of appliances with R32 gaz are regulated by the following standards: DM 37/2008, provisions on the installation of systems inside buildings;** DGLS 81/2008, text on health and safety at work; F-gas 517/2014, regulation of fluorinated gases; DPR 151/2011, regulation of procedures relating to fire prevention; EN 378:2016, refrigeration systems and heat pumps (requirements for the safety of systems).

**With the Ministerial Decree of 10 March 2020 and the subsequent Circular DCPREV 9833 of 22 July 2020 by the Fire Brigade,** the technical provisions are updated to allow the possibility of using, in air conditioning and conditioning systems, machines equipped with refrigerants classified as A1 or A2L, thus overcoming the restriction of using only non-toxic or non-flammable fluids.

However, it is recommended to carefully check the regulations in force when using equipment containing R32 gas. Failure to comply with these regulations makes designers and installers of equipment with R32 assume direct legal responsibility for the application of the equipment itself.



# CONTROL THE CLIMATE WHERE AND WHEN YOU WANT

## MORE COMFORT & SAVINGS

With Hokkaido WiFi you can control the climate remotely.



## FOR EXPERIENCED SAVERS

Hokkaido Wi-Fi allows you to save money and energy. For example, through Hokkaido apps you can turn on the air conditioning system remotely to gradually heat or cool your home or business.

## DEDICATED APP



















The dedicated app provides information about the air conditioner and its operation. It also allows you to:

- change temperature settings;
- keep energy consumption under control;
- program the air conditioner;
- check that the system is working correctly.





# LINE UP R32 MONOSPLIT

		kW	2.60	3.50	5.30	7.10
LUMINA						
Wall			✓	✓	✓	✓
AIKO						
Wall			✓	✓	✓	✓
AIKO S						
Wall			✓	✓		
COMMERCIAL						
Compact Cassette				✓	✓	
Slim Cassette 84x84						✓
Console				✓	✓	
Ducted medium static pressure				✓	✓	✓
Floor/ceiling					✓	✓
Outdoor units Wall LUMINA						
Outdoor units Wall AIKO / AIKO S						
Outdoor units Commercial						

Yields and consumption are measured under the following test conditions:

heating O.T. 7° C DB, 6° C WB - I.T. 20° C DB; cooling: O.T. 35° C DB, 24° C WB - I.T. 27° C DB, 19° C WB (ISO T1).


# INCENTIVES R32 MONOSPLIT\*

INCENTIVES		ECO BONUS	BONUS CASA	CONTO TERMICO 2.0
Wall	Lumina 22	HKEDS 260 ZA + HCNDS 260 ZA	✓	✓
		HKEDS 350 ZA + HCNDS 350 ZA	✓	✓
		HKEDS 530 ZA + HCNDS 530 ZA	✓	✓
		HKEDS 710 ZA + HCNDS 710 ZA	✓	✓
	Aiko 24	HKEDS 261 ZA + HCNDS 261 ZA	✓	✓
		HKEDS 351 ZA + HCNDS 351 ZA	✓	✓
		HKEDS 531 ZA + HCNDS 531 ZA	✓	✓
		HKEDS 711 ZA + HCNDS 711 ZA	✓	✓
	Aiko S 26	HKEDS 262 ZA + HCNDS 262 ZA	✓	✓
		HKEDS 352 ZA + HCNDS 352 ZA	✓	✓
Cassette	60x60 28	HTFDM 350 ZAL + HCKDS 350 ZA	✓	✓
		HTFDM 530 ZAL + HCKDS 530 ZA	✓	✓
	84x84 30	HTBDS 710 ZA + HCKDS 710 ZA	✓	✓
Ducted	medium static pressure 32	HRDDM 350 ZAL + HCKDS 350 ZA	✓	✓
		HRDDM 530 ZAL + HCKDS 530 ZA	✓	✓
		HRDDS 710 ZA + HCKDS 710 ZA	✓	✓
Floor	Console 34	HFIDM 350 ZAL + HCKDS 350 ZA	✓	✓
		HFIDM 530 ZAL + HCKDS 530 ZA	✓	✓
	floor/ceiling 36	HSFDM 530 ZAL + HCKDS 530 ZA	✓	✓
		HSFDS 710 ZA + HCKDS 710 ZA	✓	✓

\* For Italian market only.

# THE RANGE

## WALL TYPE MODELS MONO & MULTI

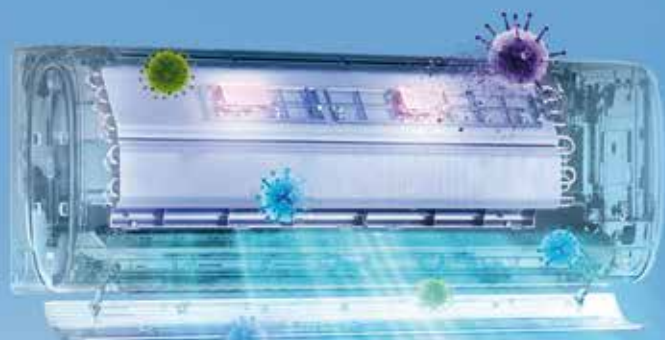

**-99.99%**

Dust mites, influenza viruses, HFMD, mold, pet germs.

### UVC STERILIZATION INCLUDED AS STANDARD (AIKO S)

#### **Sterilization**

AIKO S releases specific UV wavelengths, which penetrate the core of microorganisms, eliminating them with an efficiency of 99.99%.


#### **Neutralizes viruses, bacteria and molds**

by damaging their proteins and DNA.

### MULTIPORE TECHNOLOGY

(AIKO/AIKO S)

1935 micro holes on the outlet flap of AIKO and AIKO S allow a smooth and gentle flow of air, avoiding annoying jets of air.

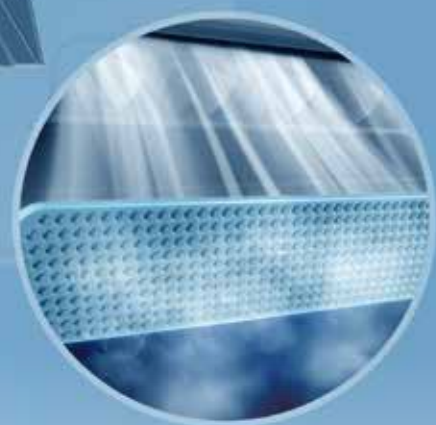

#### **Intelligent flow management through micro-perforated flap.**

The unit recognizes changes in room temperature and autonomously chooses which of the two delivery configurations to use.



**Completely closed**


**Semi-closed**



# THE RANGE

## WALL TYPE MODELS MONO & MULTI

### EFFECTIVE AGAINST VIRUSES AND BACTERIA



**-99.9%**

Influenza virus, HFMD,  
Escherichia coli,  
Staphylococcus aureus.



#### Self-Cleaning function

It determines the self-cleaning of the exchanger, drying it from any condensation residues. It prevents the formation of mold and bad odors. The sterilization process guarantees the neutralization of 99.9% of the bacteria present inside it.

#### Filtration system

- purifies and deodorizes the air;
- filters pollen, bacteria and odors;
- purifies and prevents the spread of viruses and bacteria;
- eliminates harmful dust.

#### HD (High Density) Filter

Positioned on the top of the unit, easily removable from its housing, it retains dust and hair. It is easy to clean.

### SMART MANAGEMENT WITH WIFI

All the functions, always at hand, with the app.

The convenience of setting the temperature before arriving home, to find the desired comfort as soon as you return.



WIFI  
INCLUDED



# THE RANGE

## WALL TYPE MODELS MONO & MULTI

### ELECTRIC RESISTANCE IN THE OUTDOOR UNIT BODY

(AIKO/AIKO S)

The electrical resistance in the body of the outdoor unit prevents it from freezing, prolonging the useful life of the machine and improving its performance.



### HEAT EXCHANGER TREATED WITH ANTI-CORROSION COATING

Anti-corrosion treatment for external and internal unit heat exchanger, gives the heat exchanger resistance to rain, salt and other corrosive elements.

It also prevents the proliferation of bacteria and improves heat exchange efficiency.




# THE RANGE

## WALL TYPE MODELS MONO & MULTI

### 4D AIR FLOW (AIKO S)


AIKO S spreads air evenly to reach every corner of the room. Four-dimensional air conditioning with horizontal and vertical oscillation action ensures better airflow and provides uniform cooling and heating.

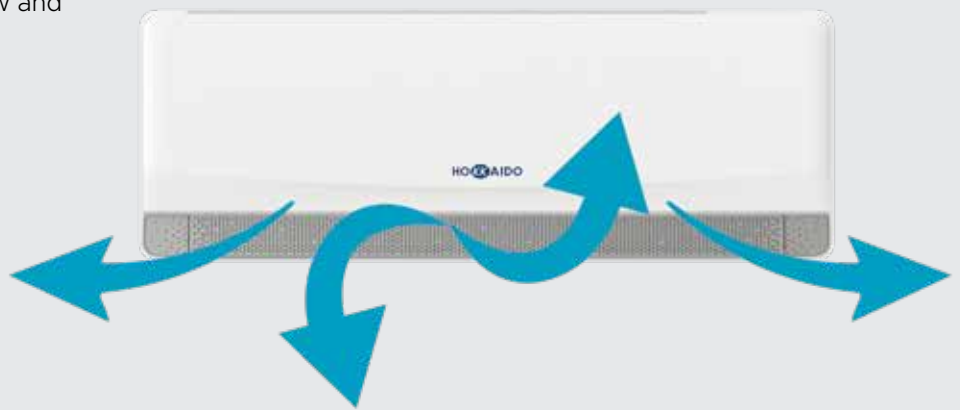

### OUTDOOR UNIT'S PCB COOLED BY REFRIGERANT

In Hokkaido wall mounted units the PCB is cooled by refrigerant flow, the PCB temperature is 15°C lower than the classic method.

Unlike traditional air conditioners, where the PCB of the outdoor unit is cooled by air flow, which is inefficient and not very effective.

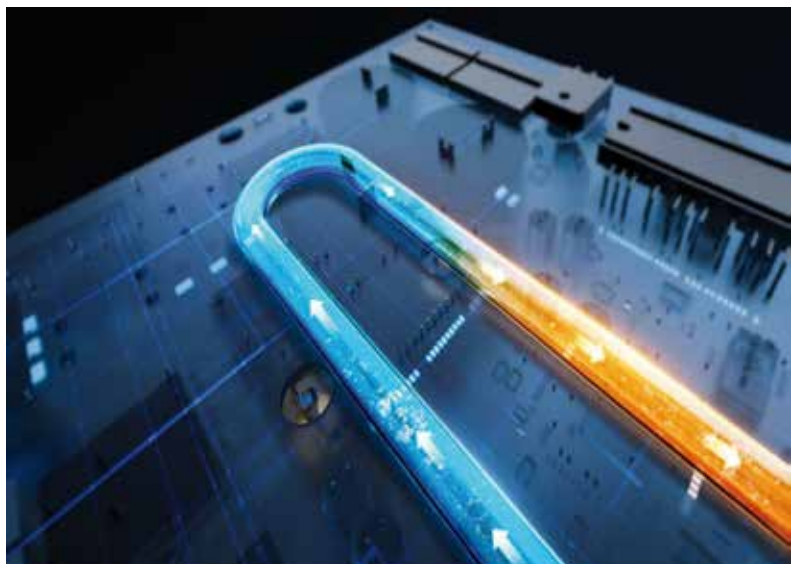



# LUMINA

A++ in cooling  
A+ in heating  
50°C  
wide maximum operation in cooling



EFFECTIVE AGAINST VIRUSES  
AND BACTERIA



-99.9%

Influenza virus,  
HFMD, Escherichia  
coli, Staphylococcus  
aureus.

SMART  
MANAGEMENT  
WITH WIFI




WIFI  
INCLUDED



HEAT EXCHANGER TREATED WITH  
ANTI-CORROSION COATING



PCB  
OF THE  
OUTDOOR  
UNIT  
COOLED BY  
REFRIGERANT

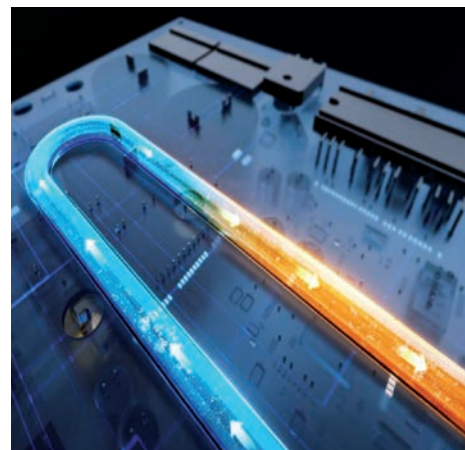

## WALL HKEDS 260-350-530-710 ZA

Wi-Fi  
includedRemote control  
included

15~50°C in cooling  
15~30°C in heating

Auto restart  
8°C function

I-Feel

Indoor unit model			HKEDS 260 ZA	HKEDS 350 ZA	HKEDS 530 ZA	HKEDS 710 ZA
Outdoor unit model			HCNDS 260 ZA	HCNDS 350 ZA	HCNDS 530 ZA	HCNDS 710 ZA
Type			DC-Inverter heat pump			
Control (supplied)			Remote control			
Wi-Fi module			Integrated			
Nominal data						
Nominal capacity (T=+35°C)	Cooling	kW	2.60 (0.60~3.10)	3.50 (0.80~4.10)	5.30 (1.30~5.70)	7.30 (1.80~7.40)
Nominal absorbed power (T=+35°C)		kW	0.80 (0.10~1.60)	1.08 (0.10~1.60)	1.63 (0.29~2.10)	2.20 (0.23~2.70)
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.25	3.24	3.25	3.32
Nominal capacity (T=+7°C)	Heating	kW	2.61 (0.80~3.40)	3.80 (1.00~4.20)	5.30 (1.30~5.50)	7.30 (1.80~7.40)
Nominal absorbed power (T=+7°C)		kW	0.70 (0.30~1.50)	1.02 (0.30~1.60)	1.42 (0.25~1.80)	1.96 (0.23~2.53)
Nominal energy performance coefficient		COP <sup>1</sup>	3.73	3.73	3.73	3.72
Seasonal data						
Theoretical load (Pdesignc)	Cooling	kW	2.60	3.50	5.30	6.70
Seasonal energy efficiency index		SEER <sup>2</sup>	6.10	7.00	6.80	6.90
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++	A++	A++	A++
Annual energy consumption	Heating (average weather conditions)	kWh/y	150	173	273	340
Theoretical load (Pdesignh) @ -10°C		kW	2.10	2.70	4.00	5.30
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.00	4.10	4.00	4.20
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+	A+	A+	A+
Annual energy consumption		kWh/y	735	922	1400	1766
Electrical data						
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz			
Power cable		Type	3 x 2.5 mm <sup>2</sup>		3 x 4 mm <sup>2</sup>	
Wiring between I.U. and O.U.		no.	5	5	5	5
Nominal absorbed electric current	Cooling	A	3.70 (0.60~8.50)	4.80 (0.70~7.80)	7.80 (2.20~9.30)	10.00 (1.00~12.00)
	Heating	A	3.30 (0.20~8.50)	4.60 (1.50~8.00)	6.50 (2.00~8.00)	9.00 (1.00~11.00)
Max current		A	8.50	9.50	12.00	16.00
Max absorbed power		kW	1.60	1.90	2.50	3.40
Refrigerant circuit data						
Refrigerant <sup>4</sup>		Type (GWP)	R32 (675)			
Q.ty of refrigerant pre-charge		Kg	0.46	0.60	0.85	1.30
Tons of CO2 equivalent		t	0.311	0.405	0.574	0.878
Liquid/gas refrigerant pipe diameter		mm (inches)	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 12.74(1/2")	6.35(1/4") / 15.88(5/8")
Max split length		m	20	20	20	25
Max difference in height U.I./U.E.		m	10	10	10	15
Split length without additional charge		m	5	5	5	5
Additional charge		g/m	20	20	30	30
Indoor unit specifications						
Dimensions	LxDxH	mm	716x193x285	768x201x299	917x218x318	1140x230x332
Net weight		Kg	7	8	10	13
Sound power level	Hi	dB(A)	52	53	59	62
Sound pressure level	S/H/M/L/Silence	dB(A)	39/35/32/31/21	40/36/33/32/22	46/41/38/36/25	49/44/41/39/27
Treated air volume (Hi/Me/Lo)	Cooling	m³/h	500/430/380	650/570/515	950/830/750	1300/1150/1020
	Heating		550/500/420	650/600/530	950/870/760	1250/1150/1020
Outdoor unit specifications						
Dimensions	LxDxH	mm	650x233x455	708x258x530	785x300x555	890x319x695
Net weight		Kg	18.5	22	27	39
Sound power level		dB(A)	59	62	62	64
Sound pressure level		dB(A)	44	44	44	46
Treated air volume		m³/h	1800	1800	2800	3600
Operating limits (outdoor temperature)	Cooling	°C	15~50			
	Heating	°C	-15~30			

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 - Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.



# AIKO



A+++  
in cooling

A++  
in heating



MULTIPORE  
TECHNOLOGY

ELECTRICAL  
RESISTANCE IN  
THE OUTDOOR  
UNIT BODY



SMART  
MANAGEMENT  
WITH WIFI



WIFI  
INCLUDED




EFFECTIVE AGAINST VIRUSES  
AND BACTERIA




-99.9%

Influenza virus,  
HFMD, Escherichia  
coli, Staphylococcus  
aureus.

HEAT EXCHANGER TREATED WITH  
ANTI-CORROSION COATING

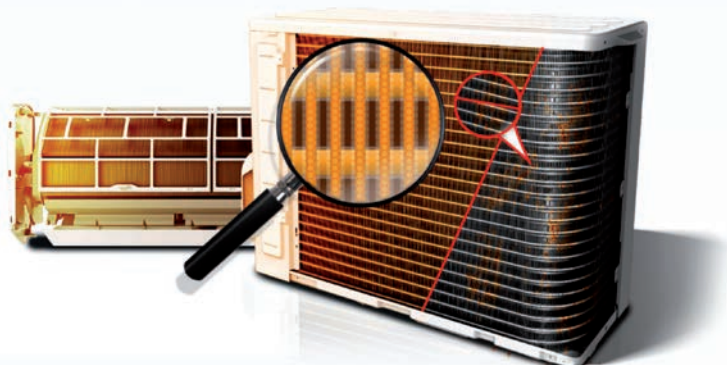

PCB  
OF THE  
OUTDOOR  
UNIT  
COOLED BY  
REFRIGERANT

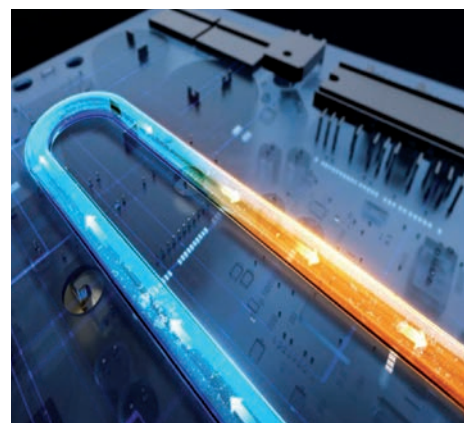



## WALL HKEDS 261-351-531-711 ZA

Remote control  
included15~53°C in cooling  
-25~30°C in heatingMultipore air outlet flap  
Auto restart8°C function  
I-Feel


Indoor unit model			HKEDS 261 ZA	HKEDS 351 ZA	HKEDS 531 ZA	HKEDS 711 ZA
Outdoor unit model			HCNDS 261 ZA	HCNDS 351 ZA	HCNDS 531 ZA	HCNDS 711 ZA
Type			DC-Inverter heat pump			
Control (supplied)			Remote control			
Wi-Fi module			Integrated			
Nominal data						
Nominal capacity (T=+35°C)	Cooling	kW	2.70 (0.60~4.00)	3.00 (0.65~4.10)	5.40 (1.30~5.90)	7.20 (1.80~7.40)
Nominal absorbed power (T=+35°C)		kW	0.72 (0.10~1.20)	0.87 (0.13~1.55)	1.43 (0.29~1.95)	1.70 (0.23~2.30)
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.75	4.02	3.78	4.24
Nominal capacity (T=+7°C)	Heating	kW	3.30 (0.80~4.20)	4.20 (0.93~4.20)	5.80 (1.30~6.10)	7.80 (1.80~8.00)
Nominal absorbed power (T=+7°C)		kW	0.80 (0.20~1.20)	1.06 (0.23~1.30)	1.33 (0.25~1.80)	2.10 (0.23~2.53)
Nominal energy performance coefficient		COP <sup>1</sup>	4.13	3.96	4.36	3.71
Seasonal data						
Theoretical load (Pdesignc)	Cooling	kW	2.70	3.50	5.40	6.10
Seasonal energy efficiency index		SEER <sup>2</sup>	8.70	8.70	8.70	8.70
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+++	A+++	A+++	A+++
Annual energy consumption	Heating (average weather conditions)	kWh/y	109	141	215	246
Theoretical load (Pdesignh) @ -10°C		kW	2.30	2.80	4.40	5.40
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.70	4.70	4.60	4.60
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++	A++	A++	A++
Annual energy consumption		kWh/y	686	845	1339	1644
Electrical data						
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz			
Power cable		Type	3 x 2.5 mm <sup>2</sup>			3 x 4 mm <sup>2</sup>
Wiring between I.U. and O.U.		no.	5	5	5	5
Nominal absorbed electric current	Cooling	A	3.30 (0.60~5.30)	4.20 (0.60~5.80)	6.40 (2.20~6.80)	7.90 (1.00~10.00)
	Heating	A	3.90 (1.00~5.30)	4.80 (1.00~6.30)	6.10 (2.00~8.00)	10.50 (1.00~11.00)
Max current		A	9.00	9.00	12.00	16.00
Max absorbed power		kW	1.60	1.50	2.40	3.20
Refrigerant circuit data						
Refrigerant <sup>4</sup>		Type (GWP)	R32 (675)			
Q.ty of refrigerant pre-charge		Kg	0.55	0.60	1.03	1.20
Tons of CO2 equivalent		t	0.371	0.405	0.695	0.810
Liquid/gas refrigerant pipe diameter		mm (inches)	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 12.74(1/2")	6.35(1/4") / 15.88(5/8")
Max split length		m	20	20	20	25
Max difference in height U.I./U.E.		m	10	10	10	15
Split length without additional charge		m	5	5	5	5
Additional charge		g/m	20	20	30	30
Indoor unit specifications						
Dimensions	LxDxH	mm	768x201x299	827x201x299	1140x230x332	1140x230x332
Net weight		Kg	8	8.5	13.5	14
Sound power level	Hi	dB(A)	54	56	56	62
Sound pressure level	S/H/M/L/Silence	dB(A)	41/37/34/32/23	43/39/36/34/24	43/39/36/34/24	49/44/41/39/27
Treated air volume (Hi/Me/Lo)	Cooling	m³/h	650/580/550	650/580/550	1060/900/800	1300/1200/1010
	Heating		700/630/600	700/630/600	1000/900/790	1200/1030/930
Outdoor unit specifications						
Dimensions	LxDxH	mm	708x258x530	708x258x530	785x281x548	890x319x695
Net weight		Kg	22.5	24.5	28.5	41
Sound power level		dB(A)	61	62	63	65
Sound pressure level		dB(A)	48	49	50	52
Treated air volume		m³/h	1800	2300	2800	4900
Operating limits (outdoor temperature)	Cooling	°C	15~53			
	Heating	°C	-25~30			

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 - - Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.

# AIKO S

A+++  
in cooling

A++  
in heating



UVC  
STERILIZATION  
INCLUDED AS  
STANDARD

4D AIR FLOW



ELECTRICAL  
RESISTANCE IN  
THE OUTDOOR  
UNIT BODY



MULTIPORE  
TECHNOLOGY



EFFECTIVE AGAINST VIRUSES  
AND BACTERIA



-99.9%

Influenza virus,  
HFMD, Escherichia  
coli, Staphylococcus  
aureus.

SMART  
MANAGEMENT  
WITH WIFI




WIFI  
INCLUDED



HEAT EXCHANGER TREATED WITH  
ANTI-CORROSION COATING



PCB  
OF THE  
OUTDOOR  
UNIT  
COOLED BY  
REFRIGERANT

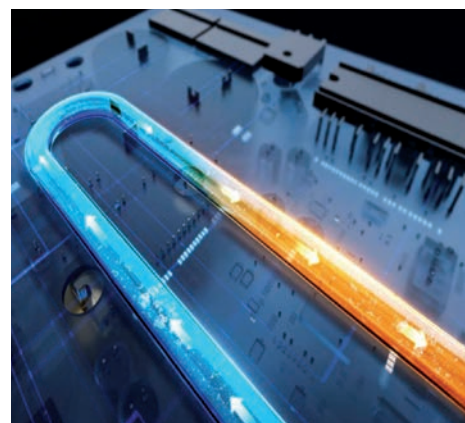

# WALL HKEDS 262-352 ZA



Remote control  
included



15~53° C in cooling  
25~30° C in heating

UVC Sterilizer  
4D Air Flow

MuType air outlet flap  
Auto restart

8° C function  
I-Feel

Indoor unit model			HKEDS 262 ZA		HKEDS 352 ZA	
Outdoor unit model			HCNDS 262 ZA		HCNDS 352 ZA	
Type			DC-Inverter heat pump			
Control (supplied)			Remote control			
Wi-Fi module			Integrated			
Nominal data						
Nominal capacity (T=+35°C)	Cooling	kW	2.70 (0.60~4.00)		3.00 (0.65~4.10)	
Nominal absorbed power (T=+35°C)		kW	0.72 (0.10~1.20)		0.87 (0.13~1.55)	
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.75		4.02	
Nominal capacity (T=+7°C)	Heating	kW	3.30 (0.80~4.20)		4.20 (0.93~4.20)	
Nominal absorbed power (T=+7°C)		kW	0.80 (0.20~1.20)		1.06 (0.23~1.30)	
Nominal energy performance coefficient		COP <sup>1</sup>	4.13		3.96	
Seasonal data						
Theoretical load (Pdesignc)	Cooling	kW	2.70		3.50	
Seasonal energy efficiency index		SEER <sup>2</sup>	8.70		8.70	
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+++		A+++	
Annual energy consumption	Heating (average weather conditions)	kWh/y	109		141	
Theoretical load (Pdesignh) @ -10°C		kW	2.30		2.80	
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.70		4.70	
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++		A++	
Annual energy consumption		kWh/y	686		845	
Electrical data						
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz			
Power cable		Type	3 x 2.5 mm <sup>2</sup>			
Wiring between I.U. and O.U.		no.	5		5	
Nominal absorbed electric current	Cooling	A	3.30 (0.60~5.30)		4.20 (0.60~5.80)	
	Heating	A	3.90 (1.00~5.30)		4.80 (1.00~6.30)	
Max current		A	9.00		9.00	
Max absorbed power		kW	1.60		1.50	
Refrigerant circuit data						
Refrigerant <sup>4</sup>		Type (GWP)	R32 (675)			
Q.ty of refrigerant pre-charge		Kg	0.55		0.60	
Tons of CO2 equivalent		t	0.371		0.405	
Liquid/gas refrigerant pipe diameter		mm (inches)	6.35(1/4") / 9.52(3/8")		6.35(1/4") / 9.52(3/8")	
Max split length		m	20		20	
Max difference in height U.I./U.E.		m	10		10	
Split length without additional charge		m	5		5	
Additional charge		g/m	20		20	
Indoor unit specifications						
Dimensions	LxDxH	mm	768x201x299		827x201x299	
Net weight		Kg	8		8.5	
Sound power level	Hi	dB(A)	54		56	
Sound pressure level	S/H/M/L/Silence	dB(A)	41/37/34/32/23		43/39/36/34/24	
Treated air volume (Hi/Me/Lo)	Cooling	m <sup>3</sup> /h	650/580/550		650/580/550	
	Heating		700/630/600		700/630/600	
			UVC Sterilizer			
Outdoor unit specifications						
Dimensions	LxDxH	mm	708x258x530		708x258x530	
Net weight		Kg	22.5		24.5	
Sound power level		dB(A)	61		62	
Sound pressure level		dB(A)	48		49	
Treated air volume		m <sup>3</sup> /h	1800		2300	
Operating limits (outdoor temperature)	Cooling	°C	15~53			
	Heating	°C	-25~30			

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 - - Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO<sub>2</sub>, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.



# COMPACT CASSETTE 60x60



## COMPACT MONOSPLIT CASSETTE

Cassette air conditioning units are designed for commercial and residential applications. Ideal for large open spaces or irregularly shaped environments, they fit comfortably and discreetly into any environment with a false ceiling.

## OPERATION

**-15~52°C**  
in cooling

**-15~24°C**  
in heating

## PERFORMANCE AND INCENTIVES

MODEL	SEER	SCOP	ECO BONUS*	BONUS CASA*	CONTO TERMICO 2.0*
<b>3.52 kW</b>	6.20	4.00	✓	✓	✓
<b>5.28 kW</b>	6.20	4.10	✓	✓	✓

\* For Italian market only.

## HTFDM 350-530 ZAL



Remote control included



-15~52° C in cooling  
-15~24° C in heating

8-way panel  
Condensation drain pump included

Provision for external air renewal inlet

Indoor unit model			HTFDM 350 ZAL		HTFDM 530 ZAL	
Outdoor unit model			HCKDS 350 ZA		HCKDS 530 ZA	
Type			DC-Inverter heat pump			
Control (supplied)			Remote control			
Nominal data						
Nominal capacity (T=+35°C)	Cooling	kW	3.52 (1.35~4.40)		5.28 (1.53~5.60)	
Nominal absorbed power (T=+35°C)		kW	1.03 (0.26~1.60)		1.55 (0.47~2.30)	
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.41		3.41	
Nominal capacity (T=+7°C)	Heating	kW	3.81 (1.24~5.30)		5.60 (1.40~6.20)	
Nominal absorbed power (T=+7°C)		kW	1.02 (0.19~1.51)		1.51 (0.46~2.25)	
Nominal energy performance coefficient		COP <sup>1</sup>	3.73		3.71	
Seasonal data						
Theoretical load (Pdesignc)	Cooling	kW	3.50		5.40	
Seasonal energy efficiency index		SEER <sup>2</sup>	6.20		6.20	
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++		A++	
Annual energy consumption	Heating (average weather conditions)	kWh/y	198		305	
Theoretical load (Pdesignh) @ -10°C		kW	2.70		4.50	
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.00		4.10	
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+		A+	
Annual energy consumption		kWh/y	926		1525	
Electrical data						
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz			
Power cable		Type	3 x 2.5 mm <sup>2</sup>		3 x 4.0 mm <sup>2</sup>	
Wiring between I.U. and O.U.		no.	4		4	
Nominal absorbed electric current	Cooling	A	4.50 (1.10~7.00)		6.70 (2.00~10.00)	
	Heating	A	4.40 (0.80~6.60)		6.60 (2.00~9.80)	
Max current		A	9.00		12.00	
Max absorbed power		kW	1.70		2.40	
Refrigerant circuit data						
Refrigerant <sup>4</sup>	Type (GWP)	R32 (675)				
Q.ty of refrigerant pre-charge	Kg	0.78		1.03		
Tons of CO2 equivalent	t	0.527		0.695		
Liquid/gas refrigerant pipe diameter	mm (inches)	6.35(1/4") / 12.74(1/2")		6.35(1/4") / 12.74(1/2")		
Max split length	m	25		30		
Max difference in height U.I./U.E.	m	10		20		
Split length without additional charge	m	5		5		
Additional charge	g/m	30		30		
Indoor unit specifications						
Dimensions	LxDxH	mm	570x570x260		570x570x260	
Net weight		Kg	15.5		15.5	
Sound power level	Erp test	dB(A)	52		56	
Sound pressure level	Hi/Mi/Lo	dB(A)	42/38/35		44/41/38	
Treated air volume	Hi/Mi/Lo	m³/h	700/620/530		760/650/580	
Outdoor unit specifications						
Dimensions	LxDxH	mm	709x280x536		785x300x555	
Net weight		Kg	23		29	
Sound power level	Erp test	dB(A)	64		65	
Sound pressure level		dB(A)	54		55	
Treated air volume	Max	m³/h	2000		2600	
Operating limits (outdoor temperature)	Cooling	°C	-15~52			
	Heating	°C	-15~24			
Accessories						
Decorative panel			HTFPD 260 ZAL			
Dimensions	LxDxH	mm	650x650x55			
Net weight		Kg	2.2			
Optional parts						
Wired control			WCD-05			

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 - - Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO<sub>2</sub>, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.

# CASSETTE

## 84x84



### CASSETTE MONOSPLIT AIR CONDITIONER

The 8-way ceiling cassette combines exceptional features with sophisticated design. Offering high seasonal efficiency and advanced control options, this range is extremely flexible and uses the low GWP R32 refrigerant.

### OPERATION

**-15~52°C**  
in cooling

**-15~24°C**  
in heating

### PERFORMANCE & INCENTIVES

MODEL	SEER	SCOP	ECO BONUS*	BONUS CASA*	CONTO TERMICO 2.0*
<b>7.03 kW</b>	6.10	4.00	✓	✓	✓

\* For Italian market only.



## HTBDS 710 ZA



Remote control included



-15~52° C in cooling  
-15~24° C in heating

8-way panel  
Condensation drain pump included

Provision for external air renewal inlet

Indoor unit model			HTBDS 710 ZA
Outdoor unit model			HCKDS 710 ZA
Type			DC-Inverter heat pump
Control (supplied)			Remote control
Nominal data			
Nominal capacity (T=+35°C)	Cooling	kW	7.03 (2.16~8.20)
Nominal absorbed power (T=+35°C)		kW	2.10 (0.67~3.30)
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.35
Nominal capacity (T=+7°C)	Heating	kW	7.91 (1.98~9.30)
Nominal absorbed power (T=+7°C)		kW	2.13 (0.65~3.30)
Nominal energy performance coefficient		COP <sup>1</sup>	3.71
Seasonal data			
Theoretical load (Pdesignc)	Cooling	kW	7.00
Seasonal energy efficiency index		SEER <sup>2</sup>	6.10
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++
Annual energy consumption	Heating (average weather conditions)	kWh/y	397
Theoretical load (Pdesignh) @ -10°C		kW	6.00
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.00
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+
Annual energy consumption		kWh/y	2052
Electrical data			
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz
Power cable		Type	3 x 4.10 mm <sup>2</sup>
Wiring between I.U. and O.U.		no.	4
Nominal absorbed electric current	Cooling	A	9.10 (2.90~14.40)
	Heating	A	9.30 (2.80~14.40)
Max current		A	16.00
Max absorbed power		kW	3.65
Refrigerant circuit data			
Refrigerant <sup>4</sup>	Type (GWP)		R32 (675)
Q.ty of refrigerant pre-charge	Kg		1.45
Tons of CO2 equivalent	t		0.979
Liquid/gas refrigerant pipe diameter	mm (inches)		9.52(3/8") / 15.88(5/8")
Max split length	m		50
Max difference in height U.I./U.E.	m		25
Split length without additional charge	m		5
Additional charge	g/m		50
Indoor unit specifications			
Dimensions	LxDxH	mm	840x840x246
Net weight		Kg	26
Sound power level	Erp test	dB(A)	58.5
Sound pressure level	Hi/Mi/Lo	dB(A)	46.5/45/43
Treated air volume	Hi/Mi/Lo	m³/h	1500/1350/1200
Outdoor unit specifications			
Dimensions	LxDxH	mm	900x350x700
Net weight		Kg	43
Sound power level	Erp test	dB(A)	70
Sound pressure level		dB(A)	58
Treated air volume	Max	m³/h	4200
Operating limits (outdoor temperature)	Cooling	°C	-15~52
	Heating	°C	-15~24
Accessories			
Decorative panel			HTBPD 710 ZA
Dimensions	LxDxH	mm	950x950x55
Net weight		Kg	5.3
Optional parts			
Wired control			WCD-05

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 - - Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO<sub>2</sub>, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.

# DUCTED

## MEDIUM STATIC PRESSURE



### DUCTED MONOSPLIT AIR CONDITIONER

Hokkaido ducted units combine premium features with discreet design for easy installation and maintenance. Our ducted air conditioning units are suitable for residential and commercial applications.

### OPERATION

**-15~52°C**  
in cooling

**-15~24°C**  
in heating

### PERFORMANCE & INCENTIVES

MODEL	SEER	SCOP	ECO BONUS*	BONUS CASA*	CONTO TERMICO 2.0*
3.52 kW	6.40	4.00	✓	✓	✓
5.28 kW	6.10	4.00	✓	✓	✓
7.03 kW	6.10	4.00	✓	✓	✓

\* For Italian market only.

## HRDDM 350-530 ZAL | HRDDS 710 ZA



-15~52° C in cooling  
-15~24° C in heating

Condensation drain pump included  
Wired control included

10~160 Pa adjustable static pressure

Indoor unit model			HRDDM 350 ZAL	HRDDM 530 ZAL	HRDDS 710 ZA
Outdoor unit model			HCKDS 350 ZA	HCKDS 530 ZA	HCKDS 710 ZA
Type			DC-Inverter heat pump		
Control (supplied)			Wired control		
Nominal data					
Nominal capacity (T=+35°C)	Cooling	kW	3.52 (1.35~14.40)	5.28 (1.53~5.60)	7.03 (2.16~8.20)
Nominal absorbed power (T=+35°C)		kW	1.03 (0.26~1.60)	1.55 (0.47~2.30)	2.17 (0.67~3.30)
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.41	3.40	3.24
Nominal capacity (T=+7°C)	Heating	kW	3.81 (1.24~5.30)	5.60 (1.40~6.20)	7.91 (1.98~9.30)
Nominal absorbed power (T=+7°C)		kW	1.02 (0.19~1.51)	1.49 (0.46~2.25)	2.13 (0.65~3.30)
Nominal energy performance coefficient		COP <sup>1</sup>	3.73	3.76	3.71
Seasonal data					
Theoretical load (Pdesignc)	Cooling	kW	3.50	5.40	7.10
Seasonal energy efficiency index		SEER <sup>2</sup>	6.40	6.10	6.10
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++	A++	A++
Annual energy consumption	Heating (average weather conditions)	kWh/y	193	307	406
Theoretical load (Pdesignh) @ -10°C		kW	2.70	4.40	5.40
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.00	4.00	4.00
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+	A+	A+
Annual energy consumption		kWh/y	931	1520	1884
Electrical data					
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz		
Power cable		Type	3 x 2.5 mm <sup>2</sup>	3 x 2.5 mm <sup>2</sup>	3 x 4.0 mm <sup>2</sup>
Wiring between I.U. and O.U.		no.	4	4	4
Nominal absorbed electric current	Cooling	A	4.50 (1.10~7.00)	6.70 (2.00~10.00)	9.40 (2.90~14.30)
	Heating	A	4.40 (0.80~6.60)	6.50 (2.00~9.80)	9.30 (2.80~14.40)
Max current		A	9.00	12.00	16.00
Max absorbed power		kW	1.70	2.40	3.65
Refrigerant circuit data					
Refrigerant <sup>4</sup>	Type (GWP)	R32 (675)			
Q.ty of refrigerant pre-charge	Kg	0.78	1.03	1.45	
Tons of CO2 equivalent	t	0.527	0.695	0.979	
Liquid/gas refrigerant pipe diameter	mm (inches)	6.35(1/4") / 12.74(1/2")	6.35(1/4") / 12.74(1/2")	9.52(3/8") / 15.88(5/8")	
Max split length	m	25	30	50	
Max difference in height U.I./U.E.	m	10	20	25	
Split length without additional charge	m	5	5	5	
Additional charge	g/m	30	30	50	
Indoor unit specifications					
Dimensions	LxDxH	mm	700x700x245	700x700x245	1000×700×245
Net weight		Kg	21	22	32
Sound power level	Erp test	dB(A)	55	59	55
Sound pressure level	Hi/Mi/Lo	dB(A)	37/34/32	44/41/37	43/41/39
Treated air volume	Hi/Mi/Lo	m³/h	720/600/500	900/750/630	1400/1190/980
Fan's static pressure	Std/Max	Pa	25/160	25/160	25/160
Outdoor unit specifications					
Dimensions	LxDxH	mm	709x280x536	785x300x555	900x350x700
Net weight		Kg	23	29	43
Sound power level	Erp test	dB(A)	64	65	70
Sound pressure level		dB(A)	54	55	58
Treated air volume	Max	m³/h	2000	2600	4200
Operating limits (outdoor temperature)	Cooling	°C	-15~52		
	Heating	°C	-15~24		

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 - - Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO2, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.



# CONSOLE



## CONSOLE MONOSPLIT AIR CONDITIONER

The new Hokkaido console indoor unit has been designed to ensure maximum functionality combined with a pleasant and modern appearance. Thanks to the diversified air flows, these indoor units allow you to obtain a pleasant temperature inside the room.

## OPERATION

**-15~52°C**  
in cooling

**-15~24°C**  
in heating

## PERFORMANCE & INCENTIVES

MODEL	SEER	SCOP	ECO BONUS*	BONUS CASA*	CONTO TERMICO 2.0*
3.50 kW	7.50	4.10	✓	✓	✓
4.70 kW	6.80	4.10	✓	✓	✓

\* For Italian market only.

## HFIDM 350-530 ZAL



Remote control included



-15~52° C in cooling  
-15~24° C in heating

Double air flow, upper and lower  
Double installation option, floor-mounted or wall-mounted

Indoor unit model			HFIDM 350 ZAL	HFIDM 530 ZAL
Outdoor unit model			HCKDS 350 ZA	HCKDS 530 ZA
Type			DC-Inverter heat pump	
Control (supplied)			Remote control	
Wi-Fi module			Integrated	
Nominal data				
Nominal capacity (T=+35°C)	Cooling	kW	3.50 (1.35~4.40)	4.70 (1.53~5.60)
Nominal absorbed power (T=+35°C)		kW	1.03 (0.26~1.60)	1.45 (0.47~2.30)
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.40	3.24
Nominal capacity (T=+7°C)	Heating	kW	3.50 (1.24~5.30)	5.00 (1.40~6.20)
Nominal absorbed power (T=+7°C)		kW	0.94 (0.19~1.51)	1.34 (0.46~2.25)
Nominal energy performance coefficient		COP <sup>1</sup>	3.72	3.73
Seasonal data				
Theoretical load (Pdesignc)	Cooling	kW	3.50	5.00
Seasonal energy efficiency index		SEER <sup>1</sup>	7.50	6.80
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++	A++
Annual energy consumption	Heating (average weather conditions)	kWh/y	162	257
Theoretical load (Pdesignh) @ -10°C		kW	2.70	3.70
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.10	4.10
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+	A+
Annual energy consumption		kWh/y	923	1261
Electrical data				
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz	
Power cable		Type	3 x 2.5 mm <sup>2</sup>	3 x 2.5 mm <sup>2</sup>
Wiring between I.U. and O.U.		no.	4	4
Nominal absorbed electric current	Cooling	A	4.50 (1.10~7.00)	6.30 (2.00~10.00)
	Heating	A	4.10 (0.80~6.60)	5.80 (2.00~9.80)
Max current		A	9.00	12.00
Max absorbed power		kW	1.70	2.40
Refrigerant circuit data				
Refrigerant <sup>4</sup>		Type (GWP)	R32 (675)	
Q.ty of refrigerant pre-charge		Kg	0.78	1.03
Tons of CO2 equivalent		t	0.527	0.695
Liquid/gas refrigerant pipe diameter		mm (inches)	6.35(1/4") / 12.74(1/2")	
Max split length		m	25	30
Max difference in height U.I./U.E.		m	10	20
Split length without additional charge		m	5	5
Additional charge		g/m	30	30
Indoor unit specifications				
Dimensions	LxDxH	mm	700x225x600	700x225x600
Net weight		Kg	15	15
Sound power level	Hi	dB(A)	52	56
Sound pressure level	Hi/Mi/Lo	dB(A)	42/39/36	44/40/37
Treated air volume	Hi/Mi/Lo	m³/h	600/530/430	650/550/450
Outdoor unit specifications				
Dimensions	LxDxH	mm	709x280x536	785x300x555
Net weight		Kg	23	29
Sound power level		dB(A)	64	65
Sound pressure level		dB(A)	54	55
Treated air volume	Max	m³/h	2000	2600
Operating limits (outdoor temperature)	Cooling	°C	-15~-52	
	Heating	°C	-15~-24	
Optional parts				
Wired control			WCD-05	

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 - - Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.

# FLOOR/CEILING



## TWO TYPES OF INSTALLATION

New design and ease of control, elegant and slim profile.  
Large air distribution grille with aerodynamic flaps to ensure fast operation and reduce noise levels.

## OPERATION

-15~**52°C**  
in cooling  
  
-15~**24°C**  
in heating

## PERFORMANCE & INCENTIVES

MODEL	SEER	SCOP	ECO BONUS*	BONUS CASA*	CONTO TERMICO 2.0*
5.30 kW	6.20	4.20	✓	✓	✓
7.03 kW	6.20	4.00	✓	✓	✓

\* For Italian market only.



## HSFDM 530 ZAL | HSFDS 710 ZA



Remote control  
included



-15~52° C in cooling  
-15~24° C in heating

Double installation possibility,  
floor or ceiling

The increased air flow allows for better air  
conditioning even in the largest rooms

Indoor unit model			HSFDM 530 ZAL		HSFDS 710 ZA	
Outdoor unit model			HCKDS 530 ZA		HCKDS 710 ZA	
Type			DC-Inverter heat pump			
Control (supplied)			Remote control			
Nominal data						
Nominal capacity (T=+35°C)	Cooling	kW	5.30 (1.60~6.00)		7.03 (2.16~8.20)	
Nominal absorbed power (T=+35°C)		kW	1.55 (0.48~2.30)		2.15 (0.67~3.30)	
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.42		3.27	
Nominal capacity (T=+7°C)	Heating	kW	5.70 (1.40~7.20)		7.62 (1.98~9.30)	
Nominal absorbed power (T=+7°C)		kW	1.52 (0.47~2.40)		2.05 (0.65~3.30)	
Nominal energy performance coefficient		COP <sup>1</sup>	3.75		3.72	
Seasonal data						
Theoretical load (Pdesignc)	Cooling	kW	5.40		7.20	
Seasonal energy efficiency index		SEER <sup>2</sup>	6.20		6.20	
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++		A++	
Annual energy consumption	Heating (average weather conditions)	kWh/y	303		404	
Theoretical load (Pdesignh) @ -10°C		kW	4.50		5.50	
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.20		4.00	
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+		A+	
Annual energy consumption		kWh/y	1500		1897	
Electrical data						
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz			
Power cable		Type	3 x 2.5 mm <sup>2</sup>		3 x 4 mm <sup>2</sup>	
Wiring between I.U. and O.U.		no.	4		4	
Nominal absorbed electric current	Cooling	A	6.70 (2.10~10.00)		9.30 (2.90~14.40)	
	Heating	A	6.60 (2.00~10.40)		8.90 (2.80~14.40)	
Max current		A	12.00		16.00	
Max absorbed power		kW	2.40		3.65	
Refrigerant circuit data						
Refrigerant <sup>4</sup>	Type (GWP)	R32 (675)				
Q.ty of refrigerant pre-charge	Kg	1.03		1.45		
Tons of CO2 equivalent	t	0.695		0.979		
Liquid/gas refrigerant pipe diameter	mm (inches)	6.35(1/4") / 12.74(1/2")		9.52(3/8") / 15.88(5/8")		
Max split length	m	30		50		
Max difference in height U.I./U.E.	m	20		25		
Split length without additional charge	m	5		5		
Additional charge	g/m	30		50		
Indoor unit specifications						
Dimensions	LxDxH	mm	1000x690x235		1280x690x235	
Net weight		Kg	28		34	
Sound power level	Erp test	dB(A)	52		54	
Sound pressure level	Hi/Mi/Lo	dB(A)	40/35/33		42/38/35	
Treated air volume	Hi/Mi/Lo	m <sup>3</sup> /h	900/720/600		1230/1020/840	
Outdoor unit specifications						
Dimensions	LxDxH	mm	785x300x555		900x350x700	
Net weight		Kg	29		43	
Sound power level	Erp test	Erp test	65		70	
Sound pressure level		dB(A)	55		58	
Treated air volume	Max	m <sup>3</sup> /h	2600		4200	
Operating limits (outdoor temperature)	Cooling	°C	-15~52			
	Heating	°C	-15~24			
Optional parts						
Wired control			WCD-05			

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 -- Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO<sub>2</sub>, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.

# R32 MULTISPLIT

Outdoor unit	EER*	COP*	SEER	SCOP	ECO BONUS	BONUS CASA	CONTO TERMICO 2.0
HCKDM 400 Z2	3.31	3.91	6.20	4.10	✓	✓	✓
HCKDM 530 Z2	3.23	3.78	6.10	4.10	✓	✓	✓
HCKDM 600 Z3	3.23	3.71	6.10	4.20	✓	✓	✓
HCKDM 800 Z3	3.23	3.71	6.20	4.10	✓	✓	✓


\* The values reported may vary depending on the combinations chosen. For more information, refer to the technical manuals.

## OPERATION RANGE

**-10° C / 52° C** in cooling  
**-15° C / 24° C** in heating

## INSTALLATION FLEXIBILITY

Long split lengths.

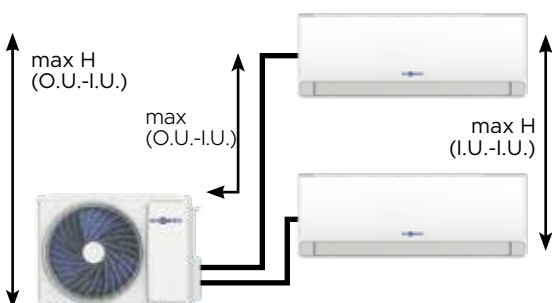

### HCKDM 400-530 Z2

L	TOTAL PIPING	= 40 m
L	MAX O.U.-I.U.	= 25 m
H	MAX O.U.-I.U.	= 15 m
H	MAX I.U.-I.U.	= 10 m

### HCKDM 600-800 Z3

L	TOTAL PIPING	= 60 m
L	MAX O.U.-I.U.	= 30 m
H	MAX O.U.-I.U.	= 15 m
H	MAX I.U.-I.U.	= 10 m


## HIGH COMPACTNESS

High compactness and easy installation.





### HCKDM 400-530 Z2

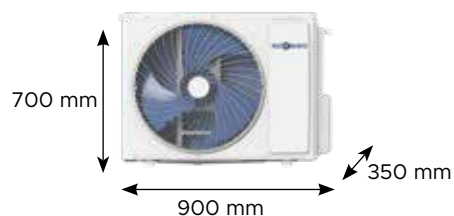

### HCKDM 600-800 Z3



# R32 MULTISPLIT

kW		4.10	5.30	6.20	7.90
Max number of connectable indoor units		2	2	3	3
					
		HCKDM 400 Z2	HCKDM 530 Z2	HCKDM 600 Z3	HCKDM 800 Z3
 <b>LUMINA MULTI</b>	HKEDM 203 ZL	✓	✓	✓	✓
	HKEDM 263 ZL	✓	✓	✓	✓
	HKEDM 353 ZL	✓	✓	✓	✓
	HKEDM 533 ZL	✓	✓	✓	✓

Yields and consumption are measured under the following test conditions:

heating O.T. 7° C DB, 6° C WB - I.T. 20° C DB; cooling: O.T. 35° C DB, 24° C WB - I.T. 27° C DB, 19° C WB (ISO T1).





## R32 MULTISPLIT

HCKDM 400 Z2  
HCKDM 530 Z2HCKDM 600 Z3  
HCKDM 800 Z3

**A++/A+** (6.15~7.91 kW) | Energy efficiency class in cooling/heating

Extended operating range in heating down to an outdoor temperature of -15° C, and in cooling up to an **outdoor temperature of +52° C**

Maximum flexibility and ease of installation guaranteed by a long length of the refrigerant pipes

Check the maximum gas concentration limits, particularly in residential applications, as required by Standard EN 378:2016.

Model			HCKDM 400 Z2	HCKDM 530 Z2	HCKDM 600 Z3	HCKDM 800 Z3
Type			Outdoor unit DC-Inverter heat pump			
Unità interne collegabili (min - max)		no.	1 - 2	1 - 2	1 - 3	1 - 3
Nominal data						
Nominal capacity (T=+35°C)	Cooling	kW	4.10 (1.80~4.51)	5.30 (2.00~5.83)	6.20 (2.20~6.71)	7.90 (2.30~8.69)
Nominal absorbed power (T=+35°C)		kW	1.24 (0.20~2.10)	1.64 (0.28~2.30)	1.92 (0.35~2.80)	2.44 (0.56~3.40)
Nominal energy efficiency coefficient		EER <sup>1</sup>	3.31	3.23	3.23	3.23
Nominal capacity (T=+7°C)	Heating	kW	4.50 (2.05~5.28)	5.60 (2.21~6.16)	6.60 (2.39~7.26)	8.20 (2.45~9.02)
Nominal absorbed power (T=+7°C)		kW	1.15 (0.20~2.10)	1.48 (0.28~2.30)	1.78 (0.35~2.80)	2.21 (0.56~3.40)
Nominal energy performance coefficient		COP <sup>1</sup>	3.91	3.78	3.71	3.71
Seasonal data						
Theoretical load (Pdesignc)	Cooling	kW	4.10	5.30	6.20	7.90
Seasonal energy efficiency index		SEER <sup>2</sup>	6.20	6.10	6.10	6.20
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A++	A++	A++	A++
Annual energy consumption	Heating (average weather conditions)	kWh/y	233	301	354	453
Theoretical load (Pdesignh) @ -10°C		kW	3.70	4.80	5.70	5.60
Seasonal energy efficiency index		SCOP <sup>2</sup>	4.10	4.10	4.20	4.10
Seasonal energy efficiency class		626/2011 <sup>3</sup>	A+	A+	A+	A+
Annual energy consumption		kWh/y	1256	1639	1900	1875
Electrical data						
Power supply		Ph-V-Hz	1-220~240V-50HZ			
Power cable		Type	3 x 2.5 mm <sup>2</sup>	3 x 2.5 mm <sup>2</sup>	3 x 4 mm <sup>2</sup>	3 x 4 mm <sup>2</sup>
Fili collegamento tra ogni U.I. e U.E.		no.	4	4	4	4
Nominal absorbed electric current	Cooling	A	5.40	7.10	8.40	10.60
	Heating	A	5.00	6.40	7.70	9.60
Max current		A	12.00	13.00	14.00	16.50
Max absorbed power		kW	2.76	3.00	3.00	3.80
Refrigerant circuit data						
Refrigerant <sup>4</sup>		Type (GWP)	R32 (675)			
Q.ty of refrigerant pre-charge		Kg	1.00	1.03	1.15	1.45
Tons of CO2 equivalent		t	0.675	0.695	0.776	0.979
Liquid/gas refrigerant pipe diameter		mm (inches)	2 x 6.35(1/4") 2 x 9.52(3/8")	2 x 6.35(1/4") 2 x 9.52(3/8")	3 x 6.35(1/4") 3 x 9.52(3/8")	3 x 6.35(1/4") 3 x 9.52(3/8")
Total split length		m	40	40	60	60
Max length of a single refrigerant line		m	25	25	30	30
Max difference in height U.I./U.E.		m	15	15	15	15
Max difference in height between I.U.		m	10	10	10	10
Split length without additional charge		m	15	15	22.5	22.5
Additional charge		g/m	25	25	25	25
Product specifications						
Dimensions	LxDxH	mm	785x300x555	785x300x555	900x350x700	900x350x700
Net weight		Kg	30	30	41.5	44.5
Sound power level		dB(A)	65	65	66	67
Sound pressure level		dB(A)	53	54	56	57
Treated air volume		m <sup>3</sup> /h	2600	2600	4100	4100
Operating limits (outdoor temperature)	Cooling	°C	-10~52			
	Heating	°C	-15~24			

The energy efficiency values refer to the following combinations: HCKDM400Z2 + 2xHKEDM263ZL -- HCKDM530Z2 + 2xHKEDM263ZL -- HCKDM600Z3 + 3xHKEDM263ZL -- HCKDM800Z3 + 3xHKEDM263ZL.

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 -- Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO<sub>2</sub> over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.

# LUMINA MULTI

## MULTISPLIT INDOOR UNITS

Wall HKEDM 203-263-353-533 ZL



-10-52°C in cooling  
-15-24°C in heating

Auto restart  
8°C function

I-Feel

Model			HKEDM 203 ZL	HKEDM 263 ZL	HKEDM 353 ZL	HKEDM 533 ZL
Type			Wall type indoor unit			
Control (supplied)			Remote control			
Wi-Fi module			Integrated			
Nominal data						
Nominal capacity	Cooling	kW	2.10	2.60	3.50	5.30
Nominal capacity	Heating	kW	2.40	2.90	3.80	5.40
Electrical data						
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz			
Wiring between I.U. and O.U.		no.	4	4	4	4
Refrigerant circuit data						
Liquid/gas refrigerant pipe diameter		mm (inches)	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 12.74(1/2")
Product specifications						
Dimensions	LxDxH	mm	768x201x299	768x201x299	768x201x299	997x222x312
Net weight		Kg	7	7	7.5	11
Sound power level	(Turbo/Hi/Mi/Lo/Silence)	dB(A)	57/50/46/42/33	57/50/46/42/33	57/50/46/42/33	60/52/47/43/35
Sound pressure level	(Turbo/Hi/Mi/Lo/Silence)	dB(A)	43/41/38/35/26	43/41/38/35/26	43/41/38/35/26	47/44/39/36/28
Treated air volume	(Turbo/Hi/Mi/Lo/Silence)	m³/h	650/570/520/470/350	650/570/520/470/350	650/570/520/470/350	950/830/750/660/480

### EFFECTIVE AGAINST VIRUSES AND BACTERIA



-99.9%

Influenza virus,  
HFMD, Escherichia  
coli, Staphylococcus  
aureus.


### SMART MANAGEMENT WITH WIFI




WIFI INCLUDED



### HEAT EXCHANGER TREATED WITH ANTI-CORROSION COATING

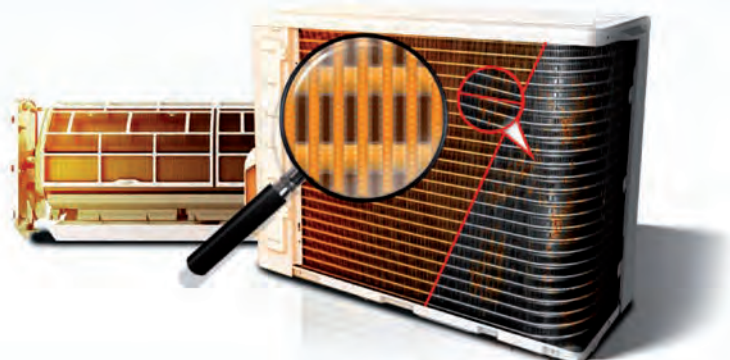

### PCB OF THE OUTDOOR UNIT COOLED BY REFRIGERANT

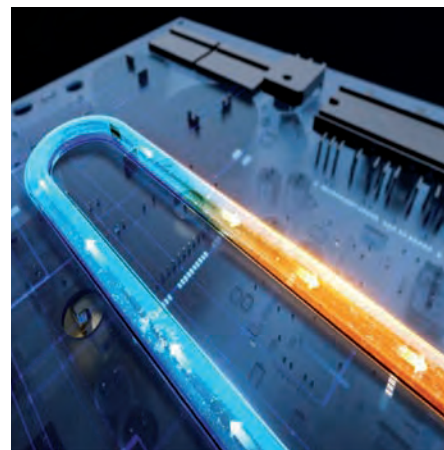



A low-angle, upward-looking photograph of a modern building's exterior. The building features multiple levels of balconies with curved glass railings. The balconies are supported by white, angular concrete structures. The glass railings reflect the sky and surrounding environment. The overall aesthetic is clean, modern, and architectural.

# COMBINATIONS



## COMBINATIONS

## HCKDM 400 Z2 cooling

Connected indoor units		Combination		Nominal cooling capacity (kW)		Total cooling performance (kW)	Power absorbed (kW)	EER (W/W)	P <sub>designc</sub>	SEER	Annual consumption (kWh)	Energy class	Bonus Casa*	Conto Termico 2.0*
		Unit A	Unit B	Unit A	Unit B	std	std	std						
1 unit	20	20	-	2.05	-	2.05	0.63	3.23	-	-	-	-	YES	-
	26	26	-	2.55	-	2.55	0.79	3.23	-	-	-	-	YES	-
	35	35	-	3.50	-	3.50	1.08	3.23	-	-	-	-	YES	-
	53	53	-	4.10	-	4.10	1.27	3.23	-	-	-	-	YES	-
2 units	20+20	20	20	2.05	2.05	4.10	1.24	3.31	4.1	6.1	234	A++	YES	-
	20+26	20	26	1.79	2.31	4.10	1.24	3.31	4.1	6.1	232	A++	YES	-
	20+35	20	35	1.51	2.59	4.10	1.24	3.31	4.1	6.1	232	A++	YES	-
	26+26	26	26	2.05	2.05	4.10	1.24	3.31	4.1	6.1	232	A++	YES	-
	26+35	26	35	1.76	2.34	4.10	1.24	3.31	4.1	6.1	232	A++	YES	-

**Energy class** = EU Delegated Regulation No. 626/2011 on the new labelling indicating the energy consumption of air conditioners.

**SEER** = EU Regulation No. 206/2012 - - Value measured according to the harmonized standard EN14825. **EER** = Value measured according to the harmonized standard EN14511

\* For Italian market only.

## HCKDM 400 Z2 heating

Connected indoor units		Combination		Nominal heating capacity (kW)		Total heating output (kW)	Power absorbed (kW)	COP (W/W)	P <sub>designc</sub>	SCOP	Annual consumption (kWh)	Energy class	Bonus Casa*	Conto Termico 2.0*
		Unit A	Unit B	Unit A	Unit B	std	std	std						
1 unit	20	20	-	2.15	-	2.15	0.54	4.01	-	-	-	-	YES	YES
	26	26	-	2.65	-	2.65	0.66	4.01	-	-	-	-	YES	YES
	35	35	-	3.50	-	3.50	0.88	4.00	-	-	-	-	YES	YES
	53	53	-	4.80	-	4.80	1.20	4.00	-	-	-	-	YES	YES
2 units	20+20	20	20	2.40	2.40	4.80	1.15	4.17	3.5	4.0	1217	A+	YES	YES
	20+26	20	26	2.10	2.70	4.80	1.15	4.17	3.6	4.0	1243	A+	YES	YES
	20+35	20	35	1.77	3.03	4.80	1.15	4.17	3.6	4.0	1243	A+	YES	YES
	26+26	26	26	2.40	2.40	4.80	1.15	4.17	3.6	4.0	1243	A+	YES	YES
	26+35	26	35	2.06	2.74	4.80	1.15	4.17	3.6	4.0	1243	A+	YES	YES

**Energy class** = EU Delegated Regulation No. 626/2011 on the new labelling indicating the energy consumption of air conditioners.

**SCOP** = EU Regulation No. 206/2012 - - Value measured according to the harmonized standard EN14825. **COP** = Value measured according to the harmonized standard EN14511.

\* For Italian market only.

## HCKDM 530 Z2 cooling

Connected indoor units		Combination		Nominal cooling capacity (kW)		Total cooling performance (kW)	Power absorbed (kW)	EER (W/W)	P <sub>designc</sub>	SEER	Annual consumption (kWh)	Energy class	Bonus Casa*	Conto Termico 2.0*
		Unit A	Unit B	Unit A	Unit B	std	std	std						
1 unit	20	20	-	2.05	-	2.05	0.64	3.20	-	-	-	-	NO	-
	26	26	-	2.55	-	2.55	0.80	3.19	-	-	-	-	NO	-
	35	35	-	3.50	-	3.50	1.07	3.27	-	-	-	-	YES	-
	53	53	-	5.30	-	5.30	1.65	3.21	-	-	-	-	NO	-
2 units	20+20	20	20	2.05	2.05	4.10	1.24	3.30	5.00	6.1	259	A++	YES	-
	20+26	20	26	2.06	2.64	4.70	1.46	3.23	5.10	6.1	259	A++	NO	-
	20+35	20	35	1.95	3.35	5.30	1.69	3.14	5.30	6.1	259	A++	NO	-
	26+26	26	26	2.65	2.65	5.30	1.75	3.03	5.30	6.1	300	A++	NO	-
	26+35	26	35	2.27	3.03	5.30	1.83	3.01	5.30	6.1	259	A++	NO	-
	35+35	35	35	2.65	2.65	5.30	1.83	3.01	5.30	6.1	259	A++	NO	-

**Energy class** = EU Delegated Regulation No. 626/2011 on the new labelling indicating the energy consumption of air conditioners.

**SEER** = EU Regulation No. 206/2012 - - Value measured according to the harmonized standard EN14825. **EER** = Value measured according to the harmonized standard EN14511.

\* For Italian market only.

## HCKDM 530 Z2 heating

Connected indoor units		Combination		Nominal heating capacity (kW)		Total heating output (kW)	Power absorbed (kW)	COP (W/W)	P <sub>designc</sub>	SCOP	Annual consumption (kWh)	Energy class	Bonus Casa*	Conto Termico 2.0*
		Unit A	Unit B	Unit A	Unit B	std	std	std						
1 unit	20	20	-	2.15	-	2.15	0.57	3.72	-	-	-	-	NO	YES
	26	26	-	2.65	-	2.65	0.71	3.73	-	-	-	-	NO	YES
	35	35	-	3.50	-	3.50	0.94	3.73	-	-	-	-	YES	YES
	53	53	-	5.40	-	5.40	1.45	3.71	-	-	-	-	NO	YES
2 units	20+20	20	20	2.50	2.50	5.00	1.34	3.72	4.65	4.00	1590	A+	YES	YES
	20+26	20	26	2.32	2.98	5.30	1.43	3.70	4.80	4.00	1656	A+	NO	NO
	20+35	20	35	2.03	3.47	5.50	1.51	3.64	4.80	4.00	1656	A+	NO	NO
	26+26	26	26	2.80	2.80	5.60	1.50	3.73	4.80	4.00	1654	A+	NO	YES
	26+35	26	35	2.40	3.20	5.60	1.51	3.72	4.80	4.00	1656	A+	NO	YES
	35+35	35	35	2.80	2.80	5.60	1.51	3.72	4.80	4.00	1656	A+	NO	YES

**Energy class** = EU Delegated Regulation No. 626/2011 on the new labelling indicating the energy consumption of air conditioners.

**SCOP** = EU Regulation No. 206/2012 - - Value measured according to the harmonized standard EN14825. **COP** = Value measured according to the harmonized standard EN14511.

\* For Italian market only.

## COMBINATIONS

## HCKDM 600 Z3 cooling

Connected indoor units		Combination			Nominal cooling capacity (kW)			Total cooling performance (kW)	Power absorbed (kW)	EER (W/W)	Pdesignc	SEER	Annual consumption (kWh)	Energy class	Bonus Casa*	Conto Termico 2.0*
		Unit A	Unit B	Unit C	Unit A	Unit B	Unit C	std	std	std						
1 unit	53	53	-	-	5.30	-	-	5.30	1.65	3.21	-	-	-	-	NO	-
2 units	20+20	20	20	-	2.05	2.05	-	4.10	1.27	3.23	4.0	5.6	265	A+	NO	-
	20+26	20	26	-	2.01	2.59	-	4.60	1.42	3.23	4.8	5.6	299	A+	NO	-
	20+35	20	35	-	1.99	3.41	-	5.40	1.67	3.23	5.2	5.6	341	A+	NO	-
	20+53	20	53	-	1.76	4.54	-	6.30	1.94	3.24	6.2	5.6	397	A+	NO	-
	26+26	26	26	-	2.60	2.60	-	5.20	1.61	3.23	5.3	5.6	341	A+	NO	-
	26+35	26	35	-	2.57	3.43	-	6.00	1.86	3.23	6.0	5.6	387	A+	NO	-
	26+53	26	53	-	2.10	4.20	-	6.30	1.94	3.24	6.2	5.6	397	A+	NO	-
	35+35	35	35	-	3.10	3.10	-	6.20	1.93	3.21	6.2	5.6	387	A+	NO	-
	35+53	35	53	-	2.46	3.74	-	6.20	1.93	3.21	6.2	5.6	387	A+	NO	-
3 units	20+20+20	20	20	20	2.07	2.07	2.07	6.20	1.92	3.23	6.2	6.1	355	A++	YES	-
	20+20+26	20	20	26	1.92	1.92	2.46	6.30	1.94	3.24	6.3	6.1	362	A++	YES	-
	20+20+35	20	20	35	1.70	1.70	2.90	6.30	1.94	3.24	6.3	6.1	362	A++	YES	-
	20+26+26	20	26	26	1.76	2.27	2.27	6.30	1.94	3.24	6.3	6.1	362	A++	YES	-
	20+26+35	20	26	35	1.58	2.03	2.70	6.30	1.94	3.24	6.3	6.1	362	A++	YES	-
	20+35+35	20	35	35	1.42	2.44	2.44	6.30	1.94	3.24	6.3	6.1	362	A++	YES	-
	26+26+26	26	26	26	2.10	2.10	2.10	6.30	1.94	3.24	6.3	6.1	362	A++	YES	-
	26+26+35	26	26	35	1.89	1.89	2.52	6.30	1.94	3.24	6.3	6.1	362	A++	YES	-

Energy class = EU Delegated Regulation No. 626/2011 on the new labelling indicating the energy consumption of air conditioners.

SEER = EU Regulation No. 206/2012 - - Value measured according to the harmonized standard EN14825. EER = Value measured according to the harmonized standard EN14511.

\* For Italian market only.

## HCKDM 600 Z3 heating

Connected indoor units		Combination			Nominal cooling capacity (kW)			Total heating output (kW)	Power absorbed (kW)	COP (W/W)	Pdesignc	SCOP	Annual consumption (kWh)	Energy class	Bonus Casa*	Conto Termico 2.0*
		Unit A	Unit B	Unit C	Unit A	Unit B	Unit C	std	std	std						
1 unit	53	53	-	-	5.40	-	-	5.40	1.59	3.40	-	-	-	-	NO	NO
2 units	20+20	20	20	-	2.50	2.50	-	5.00	1.39	3.59	4.3	3.8	1485	A	NO	NO
	20+26	20	26	-	2.45	3.15	-	5.60	1.56	3.59	4.5	3.8	1655	A	NO	NO
	20+35	20	35	-	2.14	3.66	-	5.80	1.59	3.64	5.0	3.8	1770	A	NO	NO
	20+53	20	53	-	1.76	4.54	-	6.30	1.75	3.60	5.4	3.9	1832	A	NO	NO
	26+26	26	26	-	3.15	3.15	-	6.30	1.73	3.64	5.0	3.8	1832	A	NO	NO
	26+35	26	35	-	2.70	3.60	-	6.30	1.73	3.64	5.4	3.8	1832	A	NO	NO
	26+53	26	53	-	2.10	4.20	-	6.30	1.75	3.60	5.4	4.0	1832	A+	NO	NO
	35+35	35	35	-	3.15	3.15	-	6.30	1.73	3.64	5.4	4.0	1832	A+	NO	NO
	35+53	35	53	-	2.50	3.80	-	6.30	1.73	3.64	5.4	4.0	1832	A+	NO	NO
3 units	20+20+20	20	20	20	2.20	2.20	2.20	6.60	1.78	3.71	5.7	4.0	1977	A+	YES	YES
	20+20+26	20	20	26	2.02	2.02	2.56	6.60	1.79	3.71	5.6	4.0	1925	A+	YES	YES
	20+20+35	20	20	35	1.78	1.78	3.04	6.60	1.82	3.71	5.7	4.0	1930	A+	YES	YES
	20+26+26	20	26	26	1.84	2.38	2.38	6.60	1.82	3.71	5.7	4.0	1930	A+	YES	YES
	20+26+35	20	26	35	1.65	2.12	2.83	6.60	1.82	3.71	5.7	4.0	1930	A+	YES	YES
	20+35+35	20	35	35	1.49	2.55	2.55	6.60	1.82	3.71	5.7	4.0	1930	A+	YES	YES
	26+26+26	26	26	26	2.20	2.20	2.20	6.60	1.82	3.71	5.7	4.0	1930	A+	YES	YES
	26+26+35	26	26	35	1.98	1.98	2.64	6.60	1.82	3.71	5.7	4.0	1930	A+	YES	YES

Energy class = EU Delegated Regulation No. 626/2011 on the new labelling indicating the energy consumption of air conditioners.

SCOP = EU Regulation No. 206/2012 - - Value measured according to the harmonized standard EN14825. COP = Value measured according to the harmonized standard EN14511.

\* For Italian market only.

## COMBINATIONS

## HCKDM 800 Z3 cooling

Connected indoor units		Combination			Nominal cooling capacity (kW)			Total cooling performance (kW)	Power absorbed (kW)	EER (W/W)	Pdesignc	SEER	Annual consumption (kWh)	Energy class	Bonus Casa*	Conto Termico 2.0*
		Unit A	Unit B	Unit C	Unit A	Unit B	Unit C	std	std	std						
1 unit	53	53	—	—	5.30	—	—	5.30	1.65	3.23	—	—	—	—	NO	-
2 units	20+20	20	20	—	2.05	2.05	—	4.10	1.27	3.23	4.1	6.1	234	A++	NO	-
	20+26	20	26	—	2.01	2.59	—	4.60	1.42	3.23	4.6	6.1	260	A++	NO	-
	20+35	20	35	—	1.99	3.41	—	5.40	1.67	3.23	5.4	6.1	294	A++	NO	-
	20+53	20	53	—	1.79	4.61	—	6.40	1.98	3.23	6.4	6.1	363	A++	NO	-
	26+26	26	26	—	2.65	2.65	—	5.30	1.64	3.23	5.3	6.1	294	A++	NO	-
	26+35	26	35	—	2.70	3.60	—	6.30	1.95	3.23	6.3	6.1	335	A++	NO	-
	26+53	26	53	—	2.25	4.55	—	6.80	2.11	3.23	6.8	6.1	378	A++	NO	-
	35+35	35	35	—	3.20	3.20	—	6.40	1.98	3.23	6.4	6.1	351	A++	NO	-
	35+53	35	53	—	2.45	4.35	—	6.80	2.11	3.23	6.8	6.1	378	A++	NO	-
3 units	53+53	53	53	—	3.40	3.40	—	6.80	2.11	3.23	6.8	6.1	378	A++	NO	-
	20+20+20	20	20	20	2.40	2.40	2.40	7.20	2.24	3.21	7.3	6.1	391	A++	NO	-
	20+20+26	20	20	26	2.25	2.25	2.90	7.40	2.31	3.21	7.4	6.1	397	A++	NO	-
	20+20+35	20	20	35	2.13	2.13	3.64	7.90	2.46	3.21	7.9	6.1	438	A++	NO	-
	20+20+53	20	20	53	1.73	1.73	4.44	7.90	2.45	3.23	7.9	6.1	438	A++	NO	-
	20+26+26	20	26	26	2.22	2.84	2.84	7.90	2.46	3.21	7.9	6.1	425	A++	NO	-
	20+26+35	20	26	35	1.98	2.55	3.37	7.90	2.46	3.21	7.9	6.1	438	A++	NO	-
	20+26+53	20	26	53	1.63	2.10	4.17	7.90	2.45	3.23	7.9	6.1	438	A++	NO	-
	20+35+35	20	35	35	1.78	3.06	3.06	7.90	2.45	3.23	7.9	6.1	438	A++	NO	-
	26+26+26	26	26	26	2.63	2.63	2.63	7.90	2.46	3.21	7.9	6.1	447	A++	YES	-
	26+26+35	26	26	35	2.37	2.37	3.16	7.90	2.46	3.23	7.9	6.1	438	A++	NO	-
	26+35+35	26	35	35	2.16	2.87	2.87	7.90	2.46	3.23	7.9	6.1	438	A++	NO	-
	26+35+53	26	35	53	1.82	2.43	3.65	7.90	2.46	3.23	7.9	6.1	438	A++	NO	-
	35+35+35	35	35	35	2.63	2.63	2.63	7.90	2.46	3.23	7.9	6.1	438	A++	NO	-

Energy class = EU Delegated Regulation No. 626/2011 on the new labelling indicating the energy consumption of air conditioners.

SEER = EU Regulation No. 206/2012 -- Value measured according to the harmonized standard EN14825. EER = Value measured according to the harmonized standard EN14511.

\* For Italian market only.

## HCKDM 800 Z3 heating

Connected indoor units		Combination			Nominal cooling capacity (kW)			Total heating output (kW)	Power absorbed (kW)	COP (W/W)	Pdesignc	SCOP	Annual consumption (kWh)	Energy class	Bonus Casa*	Conto Termico 2.0*
		Unit A	Unit B	Unit C	Unit A	Unit B	Unit C	std	std	std						
1 unit	53	53	—	—	5.40	—	—	5.40	1.54	3.50	—	—	—	—	NO	NO
2 units	20+20	20	20	—	2.50	2.50	—	5.00	1.41	3.55	4.9	3.8	1873	A	NO	NO
	20+26	20	26	—	2.45	3.15	—	5.60	1.58	3.55	5.8	3.8	2106	A	NO	NO
	20+35	20	35	—	2.17	3.73	—	5.90	1.64	3.61	6.0	3.8	2106	A	NO	NO
	20+53	20	53	—	1.96	5.04	—	7.00	1.94	3.61	6.0	3.8	2106	A	NO	NO
	26+26	26	26	—	2.95	2.95	—	5.90	1.64	3.61	6.0	3.8	2106	A	NO	NO
	26+35	26	35	—	2.70	3.60	—	6.30	1.75	3.61	6.0	3.8	2106	A	NO	NO
	26+53	26	53	—	2.45	4.55	—	7.00	1.94	3.61	6.0	3.8	2292	A	NO	NO
	35+35	35	35	—	3.25	3.25	—	6.50	1.75	3.61	6.0	3.8	2292	A	NO	NO
	35+53	35	53	—	2.80	4.20	—	7.00	1.94	3.61	6.0	3.8	2292	A	NO	NO
3 units	53+53	53	53	—	3.50	3.50	—	7.00	1.94	3.61	6.0	3.8	2292	A	NO	NO
	20+20+20	20	20	20	2.27	2.27	2.27	6.80	1.88	3.61	6.9	4.0	2373	A+	NO	NO
	20+20+26	20	20	26	2.13	2.13	2.74	7.00	1.94	3.61	6.9	4.0	2373	A+	NO	NO
	20+20+35	20	20	35	2.11	2.11	3.62	7.85	2.17	3.61	6.9	4.0	2373	A+	NO	NO
	20+20+53	20	20	53	1.82	1.82	4.66	8.30	2.29	3.63	6.9	4.0	2373	A+	NO	NO
	20+26+26	20	26	26	2.19	2.83	2.83	7.85	2.17	3.61	6.9	4.0	2373	A+	NO	NO
	20+26+35	20	26	35	2.06	2.63	3.51	8.20	2.27	3.61	6.9	4.0	2373	A+	NO	NO
	20+26+53	20	26	53	1.72	2.19	4.39	8.30	2.29	3.62	6.9	4.0	2373	A+	NO	NO
	20+35+35	20	35	35	1.88	3.21	3.21	8.30	2.30	3.61	6.9	4.0	2373	A+	NO	NO
	26+26+26	26	26	26	2.73	2.73	2.73	8.20	2.20	3.73	6.9	4.0	2393	A+	YES	YES
	26+26+35	26	26	35	2.49	2.49	3.32	8.30	2.29	3.61	6.9	4.0	2373	A+	NO	NO
	26+35+35	26	35	35	2.26	3.02	3.02	8.30	2.27	3.63	6.9	4.0	2373	A+	NO	NO
	26+35+53	26	35	53	1.92	2.55	3.83	8.30	2.27	3.63	6.9	4.0	2373	A+	NO	NO
	35+35+35	35	35	35	2.77	2.77	2.77	8.30	2.27	3.63	6.9	4.0	2373	A+	NO	NO

Energy class = EU Delegated Regulation No. 626/2011 on the new labelling indicating the energy consumption of air conditioners.

SCOP = EU Regulation No. 206/2012 -- Value measured according to the harmonized standard EN14825. COP = Value measured according to the harmonized standard EN14511.

\* For Italian market only.









KK

HEATING



## HEATING, THE RANGE THAT MEETS EVERY NEED

The careful process of product selection and system design is developed in Italy and then, thanks to continuous technological research, is implemented in an exclusive range, a point of reference on the hydronic pump market.

**HEATING** selects and collects excellent products for heating, air conditioning and DHW production in residential and commercial settings.

**50 KŪKI MIZU MONOBLOCCO R32**  
Air-to-water heat pump

**54 HOT WATER**  
Heat pump water heater



# KŪKI MIZU

## AIR-WATER HEAT PUMP MONOBLOC R32

- **5 capacities:**  
6-9-12-18-22 kW
- Colour **Touch Screen Wired Control** included as standard



- Automatic management of the heating flow temperature via climate curve



### SMART GRID

Reading the trend of the electricity grid, energy savings guaranteed



Control via Wi-Fi app



# KŪKI MIZU MONOBLOC R32



**A+++**

Energy class in heating mode with **35°C** flow water temperature.

**A++**

Energy class in heating mode with **55°C** flow water temperature.

## EFFICIENCY AND PERFORMANCE ALL YEAR ROUND

Heating performance guaranteed down to -25°C outdoor temperature. The Kūki Mizu heat pump can be installed in any climate zone, even in those with the most severe conditions. In summer, cooling is provided up to 45°C outdoor temperature.

**-25°/+45°C**

Outdoor temperature in heating

**-10°/+45°C**

Outdoor temperature in cooling

**-25°/+45°C**

Outdoor temperature in DHW production

**20~60°C**

Water temperature in heating

**7~25°C**

Water temperature in cooling

# KŪKI MIZU MONOBLOC R32



## ENERGY CLASS

# A+++

In heating mode with **35°C** flow water temperature.

## ENERGY CLASS

# A++

In heating mode with **55°C** flow water temperature.

1-Phase 6.60-9.15-12.20 kW  
HCWNBS 600-900-1200 Z

Model				HCWNBS 600 Z	HCWNBS 900 Z	HCWNBS 1200 Z
Heating	Rated power	A7//W35	kW	6.60	9.15	12.20
	Power consumption			1.42	2.15	2.94
	Coefficient of performance		COP	4.65	4.26	4.15
	Rated power	A7//W55	kW	5.33	7.75	10.24
	Power consumption			1.71	2.83	3.45
	Coefficient of performance		COP	3.12	2.74	2.97
Cooling	Rated power	A35//W18	kW	6.25	8.99	11.00
	Power consumption			1.54	2.41	3.08
	Energy efficiency		EER	4.06	3.73	3.57
	Rated power	A35//W7	kW	5.16	6.86	9.44
	Power consumption			1.88	2.58	3.48
	Energy efficiency		EER	2.74	2.66	2.71
Seasonal heating data	Theoretical load (Pdesignh) @ -10℃	35/55	kW	5.10/5.10	5.90/6.00	8.10/7.50
	Seasonal energy efficiency (ηs)		%	178.8/128.6	177.6/130.5	181.1/131.0
	Seasonal energy efficiency index		SCOP	4.55/3.29	4.51/3.34	4.60/3.35
	Energy efficiency class		-	A+++/A++	A+++/A++	A+++/A++
	Annual energy consumption		kWh/y	2296/3203	2684/3724	3620/4592
	Operating limits		Outdoor air temperature	Heating	℃	-25~45
Cooling		-10~45				
DHW		-25~45				
Delivery water temperature		Heating	℃	20~60		
		Cooling		7~25		
Refrigerant circuit data		Refrigerant <sup>1</sup>		type (GWP)	R32 (675)	
	Quantity (tons CO2)		kg (t)	1.40 (0.94)		2.10 (1.42)
	Control system			Electronic expansion valve		
	Compressor		type	Rotary - DC Inverter		
Hydraulic data	Heat exchanger	Type	Plate-welded, brazed Stainless Steel			
		Water flow rate	m³/h	1.1	1.5	1.9
		Pressure drops	kPa	22	40	50
	Circulation pump			Included		
	Water connections	Type	Threaded			
		Dimension	Inches	1" (DN25)		
	Operating pressure Min/Max		bar	0.5/3.0		
	Expansion vessel		Volume	L	5	
Electrical data	Power supply		Ph/V/Hz	1ph-230V-50Hz		
	Maximum current		A	12.00	15.00	17.00
	Power cable (recommended)		type	3x2.5 mm²	3x4 mm²	
Product specifications	Fan	Type	q.ty	DC Inverter x 1		
		Air flow rate	m³/h	-	-	-
	Sound power level		dB(A)	60	63	64
	Sound pressure level		dB(A)	46	48	49
	Dimensions	LxDxH	mm	1115x415x900		
	Weight	Net	kg	80	82	125
	Control (supplied)			Wired control		

The above data refers to the following standards: EN 14511:2018; EN 14825:2019; EN50564:2011; EN12102-1:2018; EN12102-2:2019; (EU)No:811:2013; (EU)No:813:2013; OJ 2014/C 207/02:2014.

1. Refrigerant leakage contributes to climate change. Refrigerants with a lower global warming potential (GWP) contribute less to global warming when released into the atmosphere than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times greater than 1 kg of CO2, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product.

In case of need, always contact qualified personnel.

# KŪKI MIZU MONOBLOC R32



3-Phase 19.10-23.00 kW  
HCWSBS 1800-2200 Z

**ENERGY  
CLASS**

**A+++**

In heating mode with **35°C**  
flow water temperature.

**ENERGY  
CLASS**

**A++**

In heating mode with **55°C**  
flow water temperature.

Model				HCWSBS 1800 Z		HCWSBS 2200 Z	
Heating	Rated power	A7//W35	kW	19.10	23.00		
	Power consumption		4.44	5.00			
	Coefficient of performance		4.30	4.60			
	Rated power	A7//W55	kW	14.73	18.31		
	Power consumption		4.70	5.87			
	Coefficient of performance		3.13	3.12			
Cooling	Rated power	A35//W18	kW	17.82	21.00		
	Power consumption		4.92	5.66			
	Energy efficiency		EER	3.62	3.71		
	Rated power	A35//W7	kW	14.95	16.50		
	Power consumption		5.20	5.70			
	Energy efficiency		EER	2.88	2.89		
Seasonal heating data	Theoretical load (Pdesignh) @ -10°C	35/55	kW	11.30/10.50	12.00/12.00		
	Seasonal energy efficiency (ηs)		%	179.7/132.5	183.2/125.2		
	Seasonal energy efficiency index		SCOP	4.57/3.39	4.66/3.21		
	Energy efficiency class		-	A+++ /A++	A+++ /A++		
	Annual energy consumption		kWh/y	5102/6430	6820/8320		
	Operating limits		Outdoor air temperature	Heating	°C	-25~45	
Cooling		-10~45					
DHW		-25~45					
Delivery water temperature		Heating	°C	20~60			
		Cooling		7~25			
Refrigerant circuit data	Refrigerant <sup>1</sup>		type (GWP)	R32 (675)			
	Quantity (tons CO2)		kg (t)	3.00 (2.03)			
	Control system			Electronic expansion valve			
	Compressor		type	Rotary - DC Inverter			
Hydraulic data	Heat exchanger	Type	Plate-welded, brazed Stainless Steel				
		Water flow rate	m³/h	3.1	4.0		
		Pressure drops	kPa	60	40		
	Circulation pump			Included			
	Water connections	Type	Threaded				
		Dimension	Inches	1-1/4" (DN32)			
	Operating pressure Min/Max		bar		0.5/3.0		
Electrical data	Expansion vessel		Volume	5			
	Power supply		Ph/V/Hz	3ph-400V-50Hz			
	Maximum current		A	9.40	12.00		
	Power cable (recommended)		type	5x2.5 mm²			
Product specifications	Fan	Type	q.ty	DC Inverter x 1			
		Air flow rate	m³/h	-	-		
	Sound power level		dB(A)	67	73		
	Sound pressure level		dB(A)	52	58		
	Dimensions	LxDxH	mm	1115x415x1320			
	Weight	Net	kg	175	180		
Control (supplied)			Wired control				

The above data refers to the following standards: EN 14511:2018; EN 14825:2019; EN50564:2011; EN12102-1:2018; EN12102-2:2019; (EU)No:811:2013; (EU)No:813:2013; OJ 2014/C 207/02:2014.

1. Refrigerant leakage contributes to climate change. Refrigerants with a lower global warming potential (GWP) contribute less to global warming when released into the atmosphere than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times greater than 1 kg of CO2, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product.

In case of need, always contact qualified personnel.



# HOT WATER

HWMB5 1080-1100 J

Heat pump water heater  
monobloc 80 and 100 liters series "Ducted kitchen"



Monobloc heat pump water heater,  
designed to be installed inside the kitchen  
column unit

**R290** | Refrigerant gas

**65° C** | Water temperature  
with compressor only

**Anti-legionella cycle**

Stainless steel tank

Titanium Anode

Removable upper body with horizontal extraction,  
to facilitate maintenance and installation  
operations in narrow spaces  
ErP Ready

## PERFORMANCE & INCENTIVES

Model	LOAD	ENERGY CLASS	COP According EN 16147	ECO BONUS*	BONUS CASA*	CONTOTERMICO 2.0*
HWMB5 1080 J	80 L	<b>A+</b>	2.93	✓	✓	✓
HWMB5 1100 J	100 L	<b>A+</b>	3.03	✓	✓	✓


\* For Italian market only.

Model			HWMB5 1080 J	HWMB5 1100 J
Tank volume	L		80	110
Nominal thermal power <sup>1</sup>	W		1000	1000
Nominal power consumption <sup>1</sup>	W		210	210
Nominal COP <sup>1</sup>	W/W		4,76	4,76
Nominal DHW production capacity <sup>1</sup>	L/h		20,00	20,00
COPDHW <sup>2</sup>	W/W		2,93	3,03
Test cycle profile <sup>2</sup>	-		M	M
Hot water volume at 40°C <sup>2</sup>	L		114	140
Energy efficiency (η <sub>wh</sub> ) <sup>3</sup>	%		123,1	128,6
Energy efficiency class <sup>3</sup>	-		A+	A+
IP protection rating	-		IPX1	IPX1
Hot water temperature regulation range	°C		35~65	35~65
Maximum hot water temperature compressor only	°C		65	65
Electrical data	Power supply	Ph-V-Hz	1-220~240V-50Hz	
	Integrative electrical resistance	W	1500	1500
	Maximum current (including resistance)	A	8,30	8,30
Refrigerant circuit data	Refrigerant <sup>4</sup>	Type (GWP)	R290 (0,02)	R290 (0,02)
	Quantity	g	140	140
	Compressor	type	Rotary ON/OFF	
Hydraulic data	Tank material	-	Stainless Steel 304	
	DHW connections	inches	G1/2" (DN15)	G1/2" (DN15)
	Solar coil connections	inches	-	-
	Maximum operating pressure	bar	10	10
	Air flow rate (with ducts)	m³/h	280	280
Air ducts	Fan's static pressure	Pa	60	60
	Internal diameter	mm	125	125
	Maximum length	m	8	8
	Working range (compressor only)	°C	-5~+43	-5~+43
Product specifications	Anode type		Titanium electrode	
	Sound power level	dB(A)	45	45
	Dimensions (D x H)	mm	ø520x1160	ø520x1368
	Net weight	kg	48	48
Controls	On-board machine control		Included	
	WiFi module		Integrated	

1. Conditions: intake air 20° C DB (15° C WB), water inlet 15° C / outlet 55° C. 2. Test according to EN16147; air 7° C, water inlet 10° C.

3. Directive 2009/125/EC - ERP EU No. 814/2013 (SGS-CSTC certification for all models). 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 1430. If 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 1430 times greater than 1 kg of CO<sub>2</sub>, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.

## HEATING

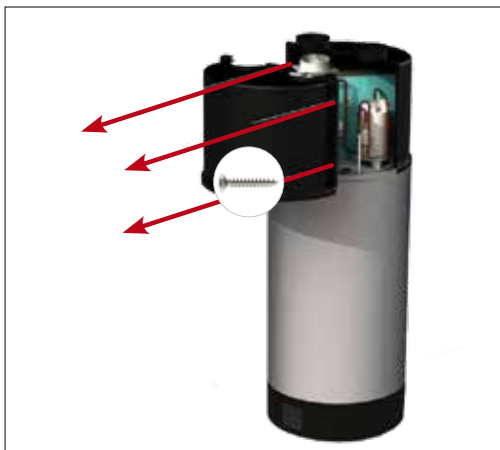

### HORIZONTALLY REMOVABLE UPPER HEAT PUMP BODY

Easier maintenance and less space required for installation.



## COMFORT AT HOME

Designed to be installed in the kitchen, like a traditional boiler, the “Ducted Kitchen” series fits comfortably inside the kitchen column, with air expelled outside.

## SAFETY


The titanium anode provides corrosion protection without the need for regular replacement like magnesium anode.

Anti-legionella system: the danger of legionella bacteria is averted thanks to periodic cycles that raise the temperature of the water inside the tank above 70° C.

## INSTALLATION WARNINGS

1. It is mandatory to install a safety and non-return valve on the cold water inlet. Failure to do so may seriously damage the equipment. Use a valve with a 0.7 MPa setting. For the installation location, refer to the piping connection diagram.
2. The safety valve discharge pipe must be vertical and must not be placed in an environment at risk of freezing.
3. Water must be able to drip freely from the tube and its end must be left free.
4. The safety valve must be tested regularly to ensure it is working properly and to remove any limescale that may be blocking it.
5. Installation must be carried out in strict compliance with current regulations (R290).

## HYDRAULIC CONNECTION DIAGRAM

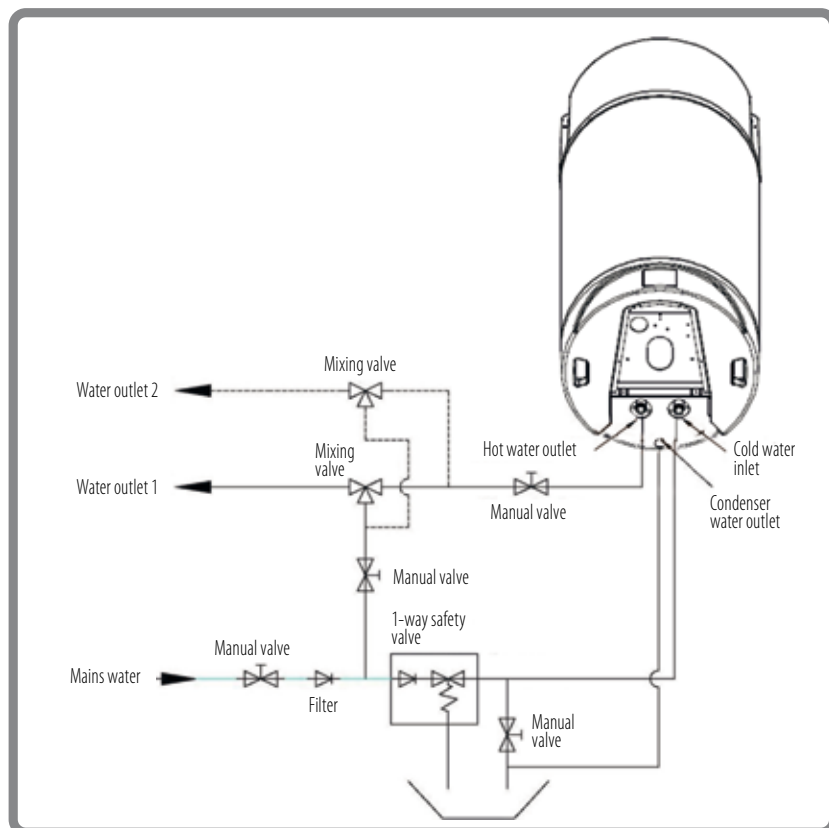

## HOT WATER

HWMBS 2211 A | HWMBS 2311 A | HWMBS 2411 A

Monobloc heat pump water heater  
200/300/400 litres "Ducted" series

Monobloc floor-standing heat pump water heater

**R134A** | Refrigerant gas**InoxStainless steel tank****60° C** | Hot water with compressor onlyImproved **Titanium Anode** electronic management**Anti-legionella cycle** | Customizable for different needs or excludable

Innovative soft touch control panel for easy commissioning, use and maintenance

ErP Ready

**No integrazione solare termico**

## PERFORMANCE &amp; INCENTIVES

MODEL	LOAD	ENERGY CLASS	COP According to EN 16147	ECO BONUS*	BONUS CASA*	CONTO TERMICO 2.0*
HWMBS 2211 A	200 L	<b>A</b>	2.64	✓	✓	✓
HWMBS 2311 A	300 L	<b>A</b>	2.69	✓	✓	✓
HWMBS 2411 A	400 L	<b>A</b>	2.81	✓	✓	✓

\* For Italian market only.

Model		HWMBS 2211 A	HWMBS 2311 A	HWMBS 2411 A
Tank volume	L	200	300	400
Solar integration coil (Stainless Steel)	m <sup>2</sup>	not present	not present	not present
Nominal thermal power <sup>1</sup>	W	2020	2020	2020
Nominal power consumption <sup>1</sup>	W	486	486	486
Nominal COP <sup>1</sup>	W/W	4.16	4.16	4.16
Nominal DHW production capacity <sup>1</sup>	L/h	43.2	43.2	45
COPDHW <sup>2</sup>	W/W	2.64	2.69	2.81
Test cycle profile <sup>2</sup>	-	L	XL	XL
Hot water volume at 40°C <sup>2</sup>	L	251	380	439
Energy efficiency (η <sub>wh</sub> ) <sup>3</sup>	%	110	111	114
Energy efficiency class <sup>3</sup>	-	A	A	A
IP protection rating	-	IPX1	IPX1	IPX1
Hot water temperature regulation range	°C	10~70 (50 default)	10~70 (50 default)	10~70 (50 default)
Maximum hot water temperature compressor only	°C	60	60	60
Electrical data	Power supply	Ph-V-Hz 1-220~240V-50Hz		
	Integrative electrical resistance	1500		
	Maximum current (including resistance)	10.00		
Refrigerant circuit data	Refrigerant <sup>4</sup>	type (GWP)	R134a (1430)	R134a (1430)
	Quantity	kg	0.80	0.80
	Tonnellate di CO2 equivalenti	t	1.144	1.144
Hydraulic data	Compressor	type	Rotary ON/OFF	
	Tank material	-	Stainless Steel 304	
	DHW connections	inches	G1" (DN25)	G1" (DN25)
	Solar coil connections	inches	-	-
	Maximum operating pressure	bar	10	10
Air ducts	Air flow rate (with ducts)	m <sup>3</sup> /h	400	450
	Fan's static pressure	Pa	60	60
	Internal diameter	mm	180	180
	Maximum length	m	6	6
Product specifications	Work field	°C	-5~+43	
	Anode type	-	Titanium electrode with alarm LED	
	Sound power level	dB(A)	55	56
	Dimensions (Diam. x H)	mm	ø560x1745	ø700x1880
	Net weight	kg	90	110
Controls	On-board machine control	Included		
	WiFi module	Integrated		

1. Conditions: intake air 20°C DB (15°C WB), water inlet 15°C / outlet 55°C. 2. Test according to EN16147; air 15°C, water inlet 10°C.

3. Directive 2009/125/EC - ERP EU n. 814/2013 (TUV Sud certification for all models). 4. Refrigerant leakage contributes to climate change. If released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 1430. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 1430 times higher than 1 kg of CO<sub>2</sub>, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. If necessary, always contact qualified personnel.

## COMFORT AT HOME

Programming to take advantage of any advantageous time slots on the electricity rate and have hot water available when needed.

Two operating modes: maximum savings with the use of the compressor alone or maximum speed with the simultaneous use of the heat pump and integrated electric resistance, to produce large quantities of DHW in short times.

## INSTALLATION WARNINGS

1. It is mandatory to install a safety and non-return valve on the cold water inlet. Failure to do so may seriously damage the equipment. Use a valve with a 0.7 MPa setting. For the installation location, refer to the piping connection diagram.
2. The safety valve discharge pipe must be vertical and must not be placed in an environment at risk of freezing.
3. Water must be able to drip freely from the tube and its end must be left free.
4. The safety valve must be tested regularly to verify its functioning and to remove any limescale that may block it.



## SAFETY

Since the heat exchanger is outside the tank, no contamination between water and refrigerant is possible.

Anti-legionella system: the danger of legionella bacteria is averted thanks to periodic cycles that raise the temperature of the water inside the tank above 65° C.

The titanium anode protects the tank from the corrosive action of water in an inexhaustible way: it guarantees greater reliability and lower maintenance costs compared to a solution with a magnesium anode.

## HYDRAULIC CONNECTION DIAGRAM

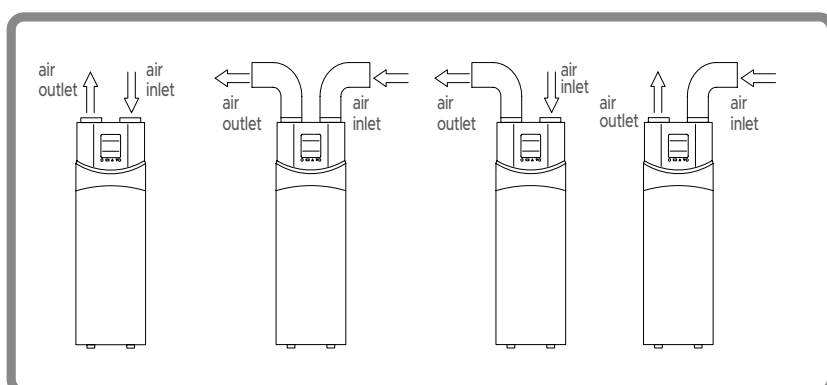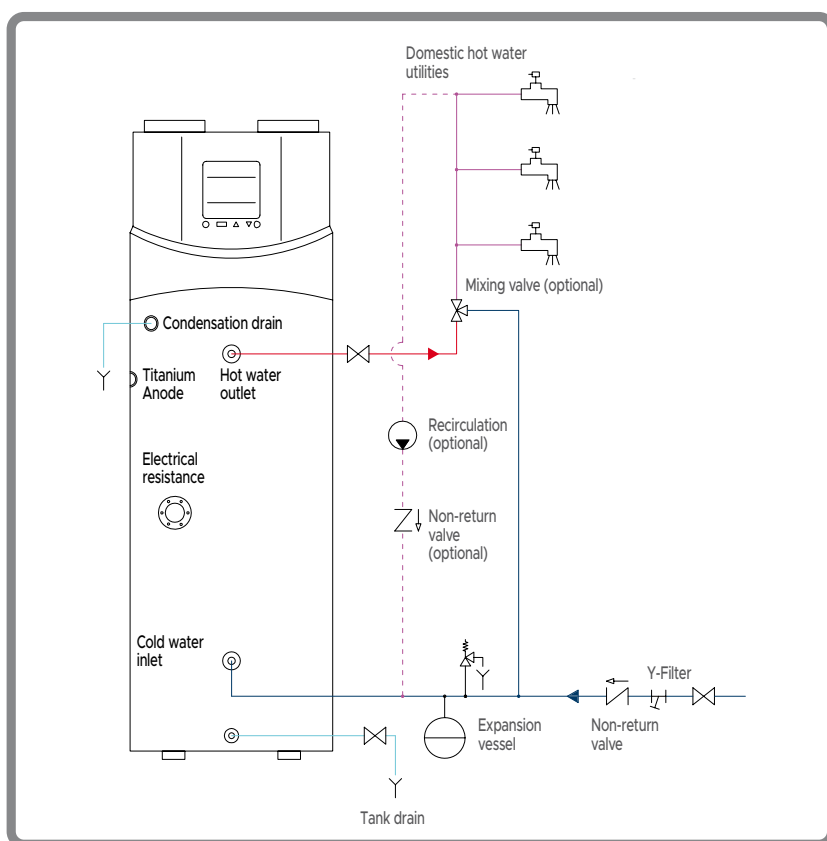



## HOT WATER

HWMBS 2211 HEA | HWMBS 2311 HEA

HWMBS 2411 HEA | HWMBS 4411 HEA

Monobloc heat pump water heater  
200/300/400 litres "Ducted" series

Floor standing water heater with  
the possibility of integration with  
solar thermal energy

**R134A** | Refrigerant gas

**Stainless steel tank**

**60° C** | Hot water with compressor only  
Improved **Titanium Anode** electronic  
management

**Anti-legionella cycle** | Customizable for  
different needs or excludable

Possibility of solar  
thermal integration

Innovative soft touch  
control panel for easy  
commissioning, use and  
maintenance  
ErP Ready



## PERFORMANCE &amp; INCENTIVES

MODEL	LOAD	ENERGY CLASS	COP According to EN 16147	ECO BONUS*	BONUS CASA*	CONTO TERMICO 2.0*
HWMBS 2211 HEA	200 L	A	2.61	✓	✓	✓
HWMBS 2311 HEA	300 L	A	2.68	✓	✓	✓
HWMBS 2411 HEA	400 L	A	2.61	✓	✓	✓
HWMBS 4411 HEA	400 L	A	2.62	✓	✓	✓

\* For Italian market only.

Model		HWMBS 2211 HEA	HWMBS 2311 HEA	HWMBS 2411 HEA	HWMBS 4411 HEA
Tank volume	L	200	300	400	400
Solar integration coil (Stainless Steel)	m <sup>2</sup>	1.00	1.00	1.00	1.00
Nominal thermal power <sup>1</sup>	W	2040	2040	2060	3285
Nominal power consumption <sup>1</sup>	W	465	460	477	895
Nominal COP <sup>1</sup>	W/W	4.39	4.43	4.32	3.67
Nominal DHW production capacity <sup>1</sup>	L/h	43.50	43.50	45.00	70.50
COPDHW <sup>2</sup>	W/W	2.61	2.68	2.61	2.62
Test cycle profile <sup>2</sup>	-	L	XL	XL	XL
Hot water volume at 40° <sup>2</sup>	L	250	390	434	434
Energy efficiency (η <sub>wh</sub> ) <sup>3</sup>	%	106	110	108	108
Energy efficiency class <sup>3</sup>	-	A	A	A	A
IP protection rating	-	IPX1	IPX1	IPX1	IPX1
Hot water temperature regulation range	°C	10~70 (50 default)	10~70 (50 default)	10~70 (50 default)	10~70 (50 default)
Maximum hot water temperature compressor only	°C	60	60	60	60
Electrical data	Power supply	Ph-V-Hz	1-220~240V-50Hz		
	Integrative electrical resistance	W	1500		
	Maximum current (including resistance)	A	10.00	10.00	13.00
Refrigerant circuit data	Refrigerant <sup>4</sup>	Type (GWP)	R134a (1430)	R134a (1430)	R134a (1430)
	Quantity	kg	1.0	1.0	0.9
	Tonnellate di CO <sub>2</sub> equivalenti	t	1.430	1.430	1.287
	Compressor	type	Rotary ON/OFF		
Hydraulic data	Tank material	-	Stainless Steel 304		
	DHW connections	inches	G1" (DN25)	G1" (DN25)	G1" (DN25)
	Solar coil connections	inches	G3/4" (DN20)	G3/4" (DN20)	G3/4" (DN20)
	Maximum operating pressure	bar	10	10	10
Air ducts	Air flow rate (with ducts)	m <sup>3</sup> /h	400	450	800
	Fan's static pressure	Pa	60	60	60
	Internal diameter	mm	180	180	180
	Maximum length	m	6	6	6
Product specifications	Work field	°C	-5~+43		
	Anode type		Titanium electrode with alarm LED		
	Sound power level	dB(A)	58.2	58.0	59.2
	Dimensions (Diam. x H)	mm	Ø560x1745	Ø700x1880	Ø700x1880
	Net weight	kg	95	115	118
Controls	On-board machine control		Included		
	WiFi module		Integrated		

1. Conditions: intake air 20° C DB (15° C WB), water inlet 15° C / outlet 55° C. 2. Test according to EN16147; air 7° C, water inlet 10° C. 1.

3. Directive 2009/125/EC - ERP EU n. 814/2013 (TUV Sud certification for all models). 4. Refrigerant leakage contributes to climate change. If released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 1430. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 1430 times higher than 1 kg of CO<sub>2</sub>, over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. If necessary, always contact qualified personnel.

## COMFORT AT HOME

Programming to take advantage of any advantageous time slots on the electricity rate and have hot water available when needed.

Two operating modes: maximum savings with the use of the compressor alone or maximum speed with the simultaneous use of the heat pump and integrated electric resistance, to produce large quantities of DHW in short times.

## INSTALLATION WARNINGS

1. It is mandatory to install a safety and non-return valve on the cold water inlet. Failure to do so may seriously damage the equipment. Use a valve with a 0.7 MPa setting. For the installation location, refer to the piping connection diagram.
2. The safety valve discharge pipe must be vertical and must not be placed in an environment at risk of freezing.
3. Water must be able to drip freely from the tube and its end must be left free.
4. The safety valve must be tested regularly to verify its functioning and to remove any limescale that may block it.



## SAFETY

Since the heat exchanger is outside the tank, no contamination between water and refrigerant is possible.

Anti-legionella system: the danger of legionella bacteria is averted thanks to periodic cycles that raise the temperature of the water inside the tank above 65° C.

The titanium anode protects the tank from the corrosive action of water in an inexhaustible way: it guarantees greater reliability and lower maintenance costs compared to a solution with a magnesium anode.

## HYDRAULIC CONNECTION DIAGRAM

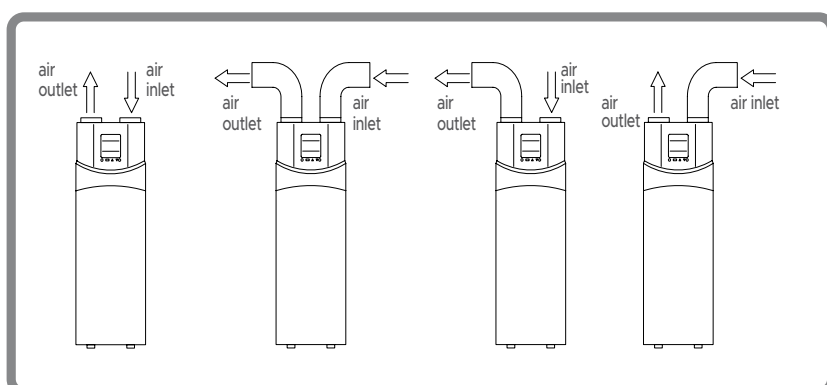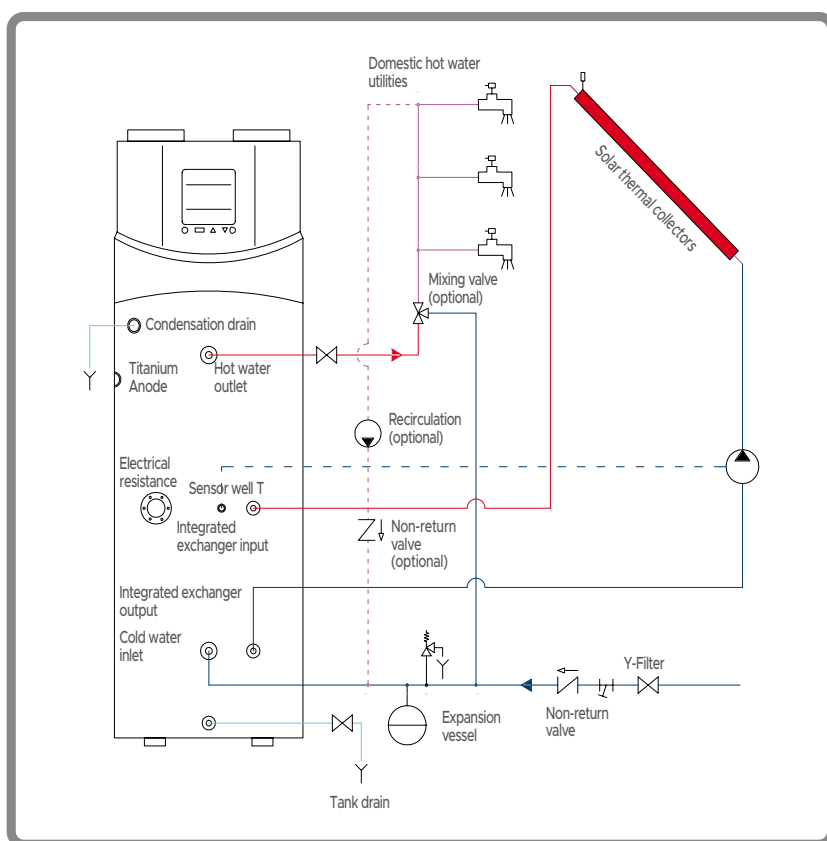



Song  
Artist



KK

# CONTROLS




10:00

0:00 - 12:00



ON

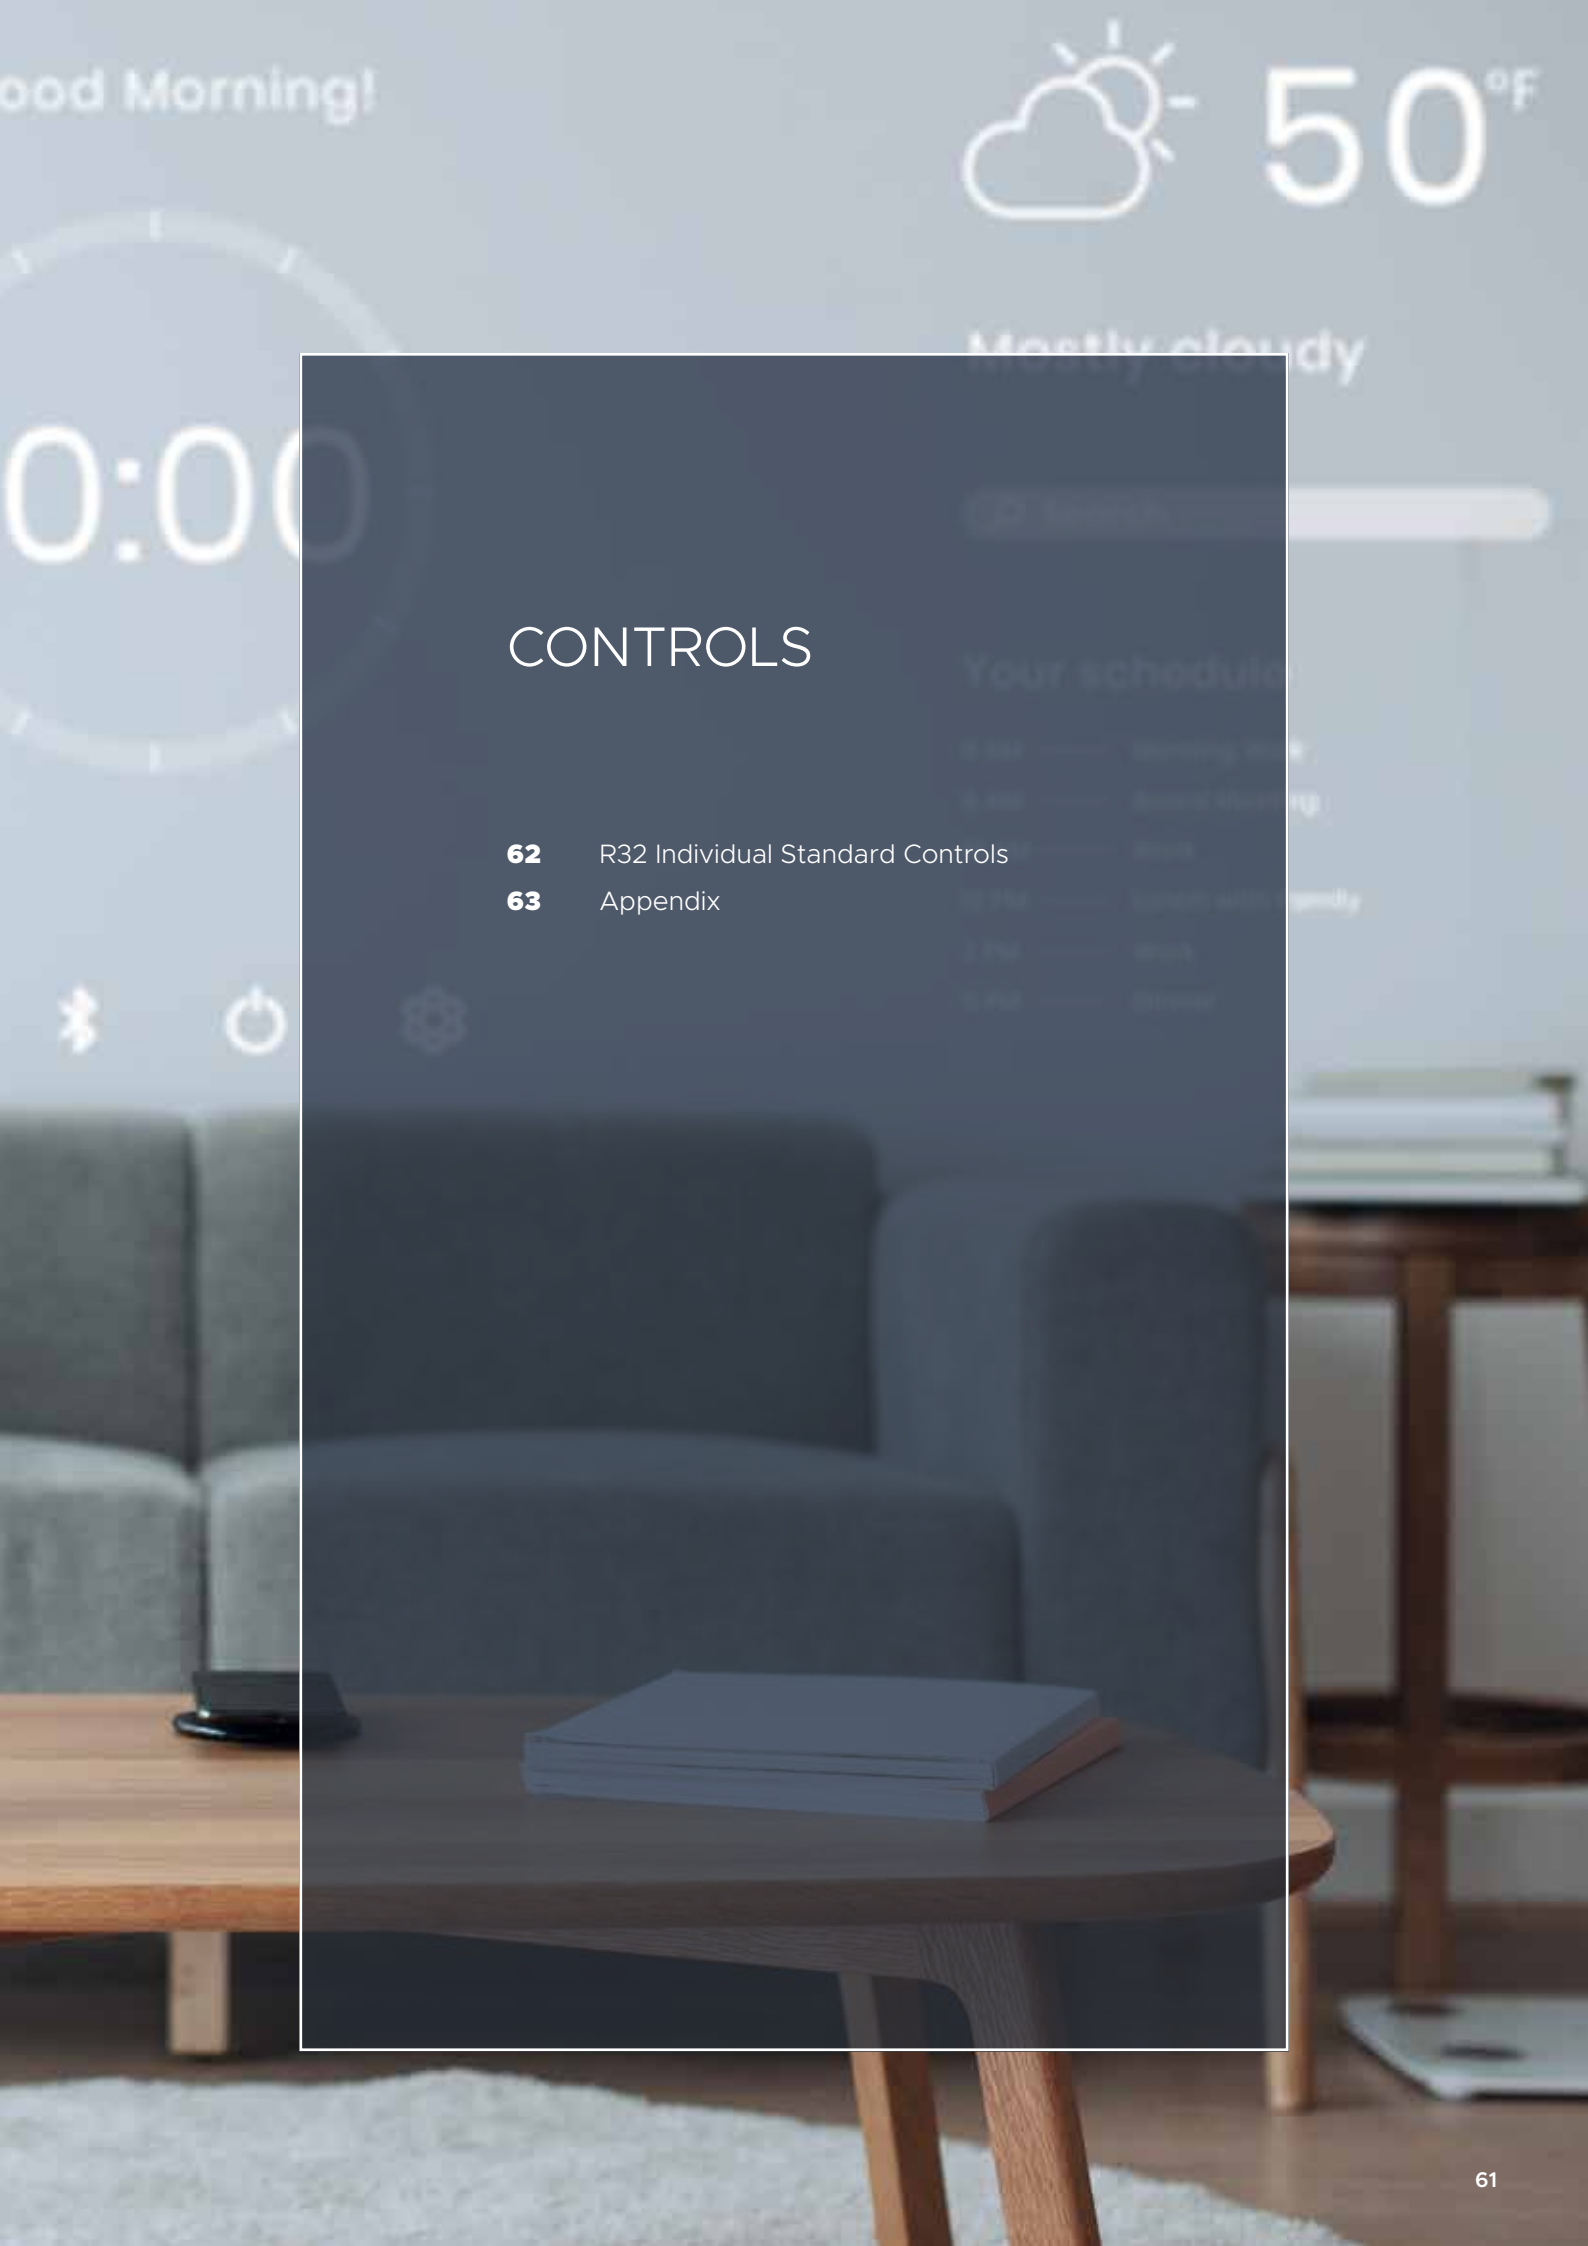

Good Morning!



50°F

0:00

Mostly cloudy

Search

## CONTROLS

Your schedule

**62** R32 Individual Standard Controls

**63** Appendix

- 8:00 AM - Morning Wake
- 8:00 AM - Good Morning
- 9:00 AM - Work
- 10:00 AM - System with Family
- 2:00 PM - Work
- 5:00 PM - Dinner



# R32 INDIVIDUAL STANDARD CONTROLS



**R32  
LUMINA**

- On/off.
- Modes: cooling, heating, dehumidification, automatic, ventilation.
- I-Feel: temperature sensor on the remote control.
- Timer on/off.
- Adjustable fan speed: low-medium-high-turbo-automatic.
- Vertical swinging of the air outlet flaps.
- ECO mode.
- Sleep.
- Silence.
- Display: Turn the bright display on/off.
- Light: enable/disable display based on ambient brightness.
- iClean: self-cleaning of dust on the heat exchanger, drying of condensation.
- Child Lock.
- 8°C heating.



**R32  
AIKO**

- On/off.
- Modes: cooling, heating, dehumidification, automatic, ventilation.
- SOFT: in cooling mode, the micro-perforated flap closes, avoiding a direct jet of cold air on people.
- I-Feel: temperature sensor on the remote control.
- Timer on/off.
- Adjustable fan speed: silent-low-medium low-medium-medium high-high-turbo-automatic.
- Vertical swinging of the air outlet flaps.
- ECO mode.
- Sleep.
- Silence.
- Display: Turn the bright display on/off.
- iClean: self-cleaning of dust on the heat exchanger, drying of condensation.
- Child Lock.
- 8°C heating.



**R32  
AIKO-S**

- 4D Air Flow
- Health (UVC): air purification through ultraviolet radiation.
- On/off.
- Modes: cooling, heating, dehumidification, automatic, ventilation.
- SOFT: in cooling mode, the micro-perforated flap closes, avoiding a direct jet of cold air on people.
- I-Feel: temperature sensor on the remote control.
- Timer on/off.
- Adjustable fan speed: silent-low-medium low-medium-medium high-high-turbo-automatic.
- Vertical and horizontal swinging of the air outlet flaps.
- ECO mode.
- Sleep.
- Silence.
- Display: Turn the bright display on/off.
- iClean: self-cleaning of dust on the heat exchanger, drying of condensation.
- Child Lock.
- 8°C heating.



**R32  
Compact Cassette, Slim  
Cassette, Console, Floor/  
Ceiling**

- On/Off.
- Modes: cooling, heating, dehumidification, ventilation, automatic.
- Fan speed: low, medium, high, automatic.
- Swing: Adjusts the position of the air outlet flaps.
- Turbo.
- Silence.
- Timer on/off.
- Sleep.
- I-Feel.
- I-Clean.

# R32 INDIVIDUAL STANDARD CONTROLS



## R32 WCD-05

**Standard** for ducted medium static pressure.

**Optional** for: Compact Cassette, Slim Cassette, Console, Floor/Ceiling.

- On/Off.
- Modes: cooling, heating, dehumidification, ventilation, automatic.
- Fan speed: low-medium-high.
- Timer on/off.
- Turbo.
- Sleep.
- Silence.
- ECO.
- Child Lock



## R32 wall type LUMINA MULTI

- On/off.
- Modes: cooling, heating, dehumidification, automatic, ventilation.
- I-Feel: temperature sensor on the remote control.
- Timer on/off.
- Adjustable fan speed: low-medium-high-turbo-automatic.
- Vertical swinging of the air outlet flaps.
- ECO mode.
- Sleep.
- Silence.
- Display: Turn the bright display on/off.
- Light: Turns display on/off based on ambient brightness.
- iClean: self-cleaning of dust on the heat exchanger, drying of condensation.
- Child Lock.
- 8°C heating.

## APPENDIX

### Control Functions Detail

**Sleep:** the unit regulates the room temperature to achieve maximum comfort along with energy saving. The unit automatically exits this mode in case of 10 hours of continuous operation.

**Turbo:** the unit operates at maximum speed to quickly reach the desired cooling or heating temperature.

**Display:** turn on/off the unit's display.

**Silence mode:** attenuation of the compressor frequency with consequent reduction of noise emissions.

**Heating Function 8°C:** prevents the room temperature from falling below 8° C.

**I-Feel Function:** adjusts the room temperature according to that detected by the remote control to obtain maximum comfort.

**Eco Function:** the system will modulate the operating frequency, creating the right compromise between performance and energy saving.

**iClean:** self-cleaning of dust on the heat exchanger and drying of condensation to prevent the formation of mold and bacteria.

**Swing:** positioning of motorized flaps.

**Soft Function:** in cooling mode, the micro-perforated flap closes, avoiding a direct jet of cold air on people.

**Health Function (UVC):** purification of supply air by germicidal ultraviolet radiation.

**Light:** automatically activate/deactivate display based on ambient brightness.

**4D Air Flow:** the flaps move automatically in all directions, distributing the supplied air evenly and ensuring maximum comfort.

**Timer on/off:** on or off timer, settable with a time range from 0.5 to 24 hours.



Due to the continuous technological evolution of the products, we reserve the right to change the technical specifications at any time and without prior notice. The products depicted are only examples of the application types.







**HOKKAIDO is a brand of TERMAL SALES**

**TERMAL SALES S.r.l.**

Via della Salute 14 Tel. +39 051 4133 111  
40132 Bologna Italy **[www.hokkaido.it](http://www.hokkaido.it)**