



HEATING





THE RANGE THAT MEETS ALL NEEDS



The careful process of selecting system requirements and design is expanding in Italy. Thanks to continuous technological research for this purpose, an exclusive hydronic pump range has found its place on the market.

HEATING therefore incorporates a selection of excellent products for **heating, air conditioning** and **DHW production** for the residential and commercial sectors.

HEATING



FAN COIL - HYDRONIC TERMINALS	110
Exposed - recessed	
MONOBLOC R32	112
Air-water heat pump	
MINICHILLER FULL DC INVERTER	116
Air-water heat pump	
HP SPLIT FULL DC INVERTER	118
Air-water heat pump	
WATER HEATER WITH HEAT PUMP	120
Hot Water	

HEATING



FAN COIL - EXPOSED AND RECESSED HYDRONIC TERMINALS

EXPOSED UNIT



HFLMM 200-900 W-SN

RECESSED UNIT



HFYMM 200 W-SN

Thermal comfort for all seasons in a single device.

Hokkaido FAN COIL terminals are cutting-edge products in terms of design, performance, quiet, consumption and functionality. They are ideal for all environments that need to be air-conditioned, heating or cooling 365 days a year at all times. Their versatility and ability to maintain indoor comfort make them products that can be installed both in homes and in other spaces such as offices, hotels, hospitals, airports, libraries, museums, archives, religious places of worship, warehouses and basements.

Flexible installation and simple maintenance

Both Hokkaido FAN COIL versions, recessed and exposed, can be installed both on the floor and on the ceiling thanks to the special shape of the condensate drain tray and the possibility of interacting via the remote control panel. Coil connections are on the left and can be switched to the right.

The FAN COILS can also be easily inspected, making routine and special maintenance easy and fast.

**ONLY 12 W
OF POWER CONSUMPTION**

[mod. 200]

ONLY 19 DB(A)

[mod. 200]

Characteristics

5 power sizes for the exposed model and 1 power size for the recessed model.

Floor/ceiling model in the double exposed and recessed version.

Extremely quiet: only 19 dB(A) for size 200.

DC Brushless fan motor.

Useful for ceiling and floor installations.

Compact, elegant model with decorative feet (optional).

The grey louvres are manually adjustable on the exposed model, ensuring even diffusion of air inside the environment for optimal comfort.

The DC Brushless fan motor is the technological heart of the Hokkaido FAN COIL range

- High energy efficiency.
- Economic savings.
- Significant reduction in energy consumption compared to tradition fan coil with AC motor.
- Reduced CO2 emissions.

In heating mode

Ventilation starts only if the water inlet temperature is > 30° C: this prevents the circulation of cold air in the room.

Temperature

The room temperature range that can be set on the Hokkaido fan coil thermostat is 17-30° C (both in cold and heat).


HEATING



FAN COIL - EXPOSED AND RECESSED HYDRONIC TERMINALS

Centralized management

Allows up to 64 units to be controlled completely and independently.

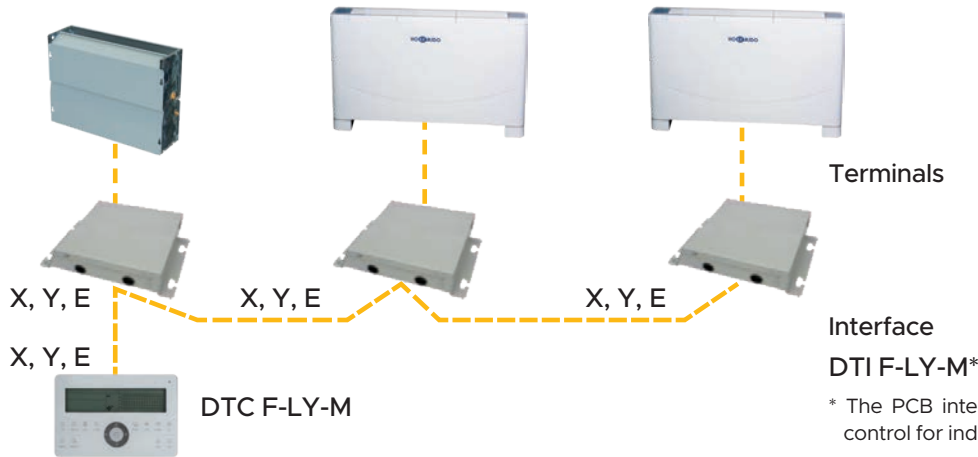

Terminals

Interface
DTI F-LY-M*

* The PCB interface kit is already equipped with a wired control for individual control of the unit.

Centralised control

- LCD display.
- Soft touch buttons.
- Operating mode and temperature control.
- Speed control (high/medium/low).
- Daily on-off timer.

PCB interface kit

(to be combined with the centralized control)

An interface must be installed for each connected terminal.

Exposed unit		HFLMM 200 W-SN	HFLMM 350 W-SN	HFLMM 550 W-SN	HFLMM 700 W-SN	HFLMM 900 W-SN
Recessed unit		HFYMM 200 W-SN				
Power	V/Ph/Hz	220-240/1/50				
Air flow (H/M/L) 1	m ³ /h	255 / 215 / 190	510 / 430 / 380	765 / 650 / 570	1020 / 870 / 765	1530 / 1300 / 1150
Cooling 2	Power (H/M/L)	1.74 / 1.31 / 1.05	2.84 / 2.21 / 1.63	4.43 / 3.21 / 2.52	5.51 / 3.92 / 2.99	6.87 / 5.32 / 4.31
	Water flow	299	488	762	948	1182
	Water load loss	8.5	16.3	30.1	16.6	31.4
Water heat. 45° C 3	Power (H/M/L)	1.67 / 1.16 / 1.03	3.02 / 2.27 / 1.63	4.53 / 3.23 / 2.44	5.74 / 4.19 / 3.17	7.58 / 5.65 / 4.52
	Water flow	245	400	625	777	969
	Water load loss	5.6	10.2	17.7	10.2	17.9
Water heat. 55° C 4	Power (H/M/L)	2.41 / 1.68 / 1.48	4.34 / 3.27 / 2.35	6.51 / 4.65 / 3.52	8.26 / 6.03 / 4.55	10.9 / 8.13 / 6.50
	Water flow	353	576	899	1.119	1.395
	Water load loss	10.4	18.9	32.9	18.9	33.3
Water heat. 70° C 5	Power (H/M/L)	2.76 / 1.92 / 1.69	4.98 / 3.75 / 2.69	7.47 / 5.33 / 4.03	9.47 / 6.91 / 5.22	12.5 / 9.32 / 7.46
	Water flow	201	328	512	637	795
	Water load loss	3.8	6.8	11.9	6.8	12.0
Electrical absorption (H)	W	12	26	26	36	101
Sound pressure (H/M/L) 6	dB(A)	29/25/19	32/28/22	36/32/26	40/34/28	43/37/31
Fan motor	Type	DC Brushless				
	Quantity	1				
Fan	Type	Centrifugal with forward curved blades				
	Quantity	1	2	2	3	3
Coil	Rows	3	2	2	2	2
	Maximum pressure	1.6				
Exposed version	Diameter	09.52				
	Net dimensions	800x592x220	1000x592x220	1200x592x220	1500x592x220	1500x592x220
	Packaging dimensions	889x683x312	1089x683x312	1289x683x312	1589x683x312	1589x683x312
	Net weight	24.4	28.2	34.2	40.0	40.0
	Gross weight	28.4	33.2	39.7	45.5	45.5
Recessed version	Net dimensions	550x545x212	750x545x212	950x545x212	1250x545x212	1250x545x212
	Packaging dimensions	639x639x305	839x639x305	1039x639x305	1339x639x305	1339x639x305
	Net weight	17.0	20.0	25.0	32.0	32.0
	Gross weight	19.0	23.5	29.0	36.0	36.0
Hydraulic connections	"	G3/4				
Drain	mm	ØD016				

NOTES (1) H: High speed; M: Medium speed; L: Low speed - Useful pressure head recessed version: 12 Pa. (2) Cooling conditions: water in 7° C / ΔT 5° C; air in 27° C DB / 19° C WB. (3) Heating conditions: water in 45° C, ΔT 5° C; air in 20° C DB. (4) Heating conditions: water in 55° C, ΔT 5° C; air in 20° C DB. (5) Heating conditions: water in 70° C, ΔT 10° C; air in 20° C WB. (6) Noise level tested in a semi-anechoic chamber, distance 1 m.

HEATING

.....

MONOBLOC R32

NEW

OUTDOOR UNITS



Single phase 5-7-9 kW
HCEWMS 500 Z
HCEWMS 700 Z
HCEWMS 900 Z



Single phase 12-14-16 kW
HCEWMS 1200 - 1400 - 1600 Z
Three-phase 12-14-16 kW
HCVWMS 1202 - 1402 - 1602 Z

DUAL STAGE COMPRESSOR



The dual stage compressor reduces possible vibrations during rotation, effectively dampening noise.

BROAD OPERATING RANGE



COOLING

-5°/+46°
(external temperature)

PRODUCT PLUSES



3 operating modes

Auto, cooling, heating.



Disinfect

Activation of the anti-legionella function.

CIRCULATOR



Circulation pump included.



HEATING

-25°/+35°
(external temperature)



Timer

Daily and weekly.



Silent mode

Setting of two sound dampening levels and two timers.



DHW PRODUCTION

-25°/+43°
(external temperature)



Holiday mode

Timer setting during a selected period.



Recirculation pump

Pump on and off settable using the timer.

HEATING

.....

MONOBLOC R32



4 OPERATING MODES

- COOLING
- HEATING
- DOMESTIC HOT WATER PRODUCTION
- AUTOMATIC

3 COMBINED OPERATING MODES



HEATING + DHW operating mode

- COOLING + DHW
- HEATING + DHW
- AUTOMATIC + DHW

SYSTEM

Climatic curve management

The system allows the user to set 2 curves for each thermal zone:



- Climatic curve in heating mode
- Climatic curve in cooling mode

Up to 8 different climate curves can be selected for each mode, depending on the external ambient temperature.

INSTALLATION FLEXIBILITY

The monobloc in R32 has extensive installation flexibility. Depending on the needs of the end user, the system allows you to:

- Heat and cool rooms with radiant floors, high efficiency radiators and/or fancoils
- Product domestic hot water
- Integrate the tank with thermal solar panels
- Set the maximum operating current

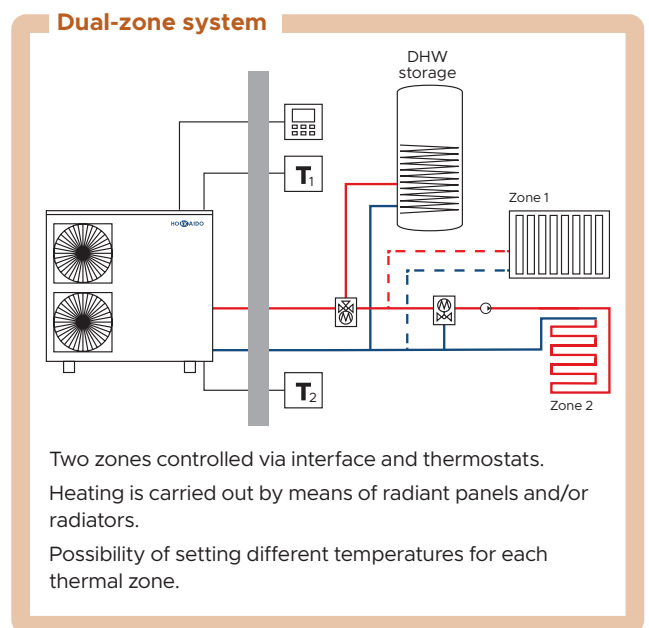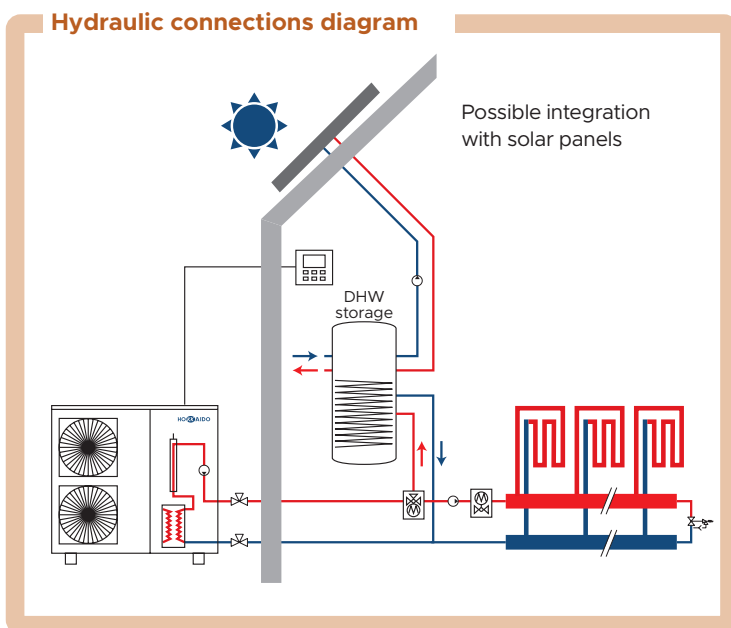

HEATING



MONOBLOC R32



Single phase 5-7-9 kW
HCEWMS 500 Z
HCEWMS 700 Z
HCEWMS 900 Z

ENERGY EFFICIENCY CLASS

A+++

In heating mode with **35°C** delivery water temperature.

ENERGY EFFICIENCY CLASS

A++

In heating mode with **55°C** delivery water temperature.

Model				HCEWMS 500 Z	HCEWMS 700 Z	HCEWMS 900 Z
Heating	Rated power	A7//W35	kW	4.65	6.65	8.60
	Electrical absorption		COP	0.93	1.35	1.87
	Performance coefficient			5.00	4.93	4.60
	Rated power	A7//W45	kW	4.80	6.70	8.60
	Electrical absorption		COP	1.33	1.88	2.50
	Performance coefficient			3.61	3.56	3.44
	Seasonal energy efficiency (ηs)	35/55	%	176/127	176/127	177/126
Energy efficiency class	35/55	-	A+++/A++	A+++/A++	A+++/A++	
Cooling	Rated power	A35//W18	kW	4.60	6.45	8.00
	Electrical absorption		EER	0.95	1.39	1.92
	Energy efficiency			4.84	4.64	4.17
	Rated power	A35//W7	kW	4.85	6.30	7.95
	Electrical absorption		EER	1.63	2.27	3.15
	Energy efficiency			2.98	2.78	2.52
Operating limits	Outside air temperature	Heating	°C	-25~35		
		Cooling		-5~43		
		DHW		-25~43		
	Delivery water temperature	Heating	°C	25~60		
		Cooling		5~25		
		DHW		40~60		
Refrigerant	Type (GWP)	R32 (675)				
	Quantity (tons CO2)	kg (t)	2.0 (1.350)			
	Control system	Electronic expansion valve				
Type of compressor	Twin Rotary - DC Inverter					
Internal circulator	WILO Yonos PARA RS 15/6 RKC					
Expansion tank	Volume	L	2			
	Pre-load	bar	1.5			
Hydraulic connections	Water inlet/outlet	Inches	1"M	1"M	1"M	
	Power	Ph-V-Hz	1ph-220~240V-50Hz			
Electrical data	Maximum current	A	14.1			
	Power cable	type	3x4 mm ²			
	Control	Standard	Wire remote control			
Sound pressure level at 1 m	Max	dB(A)	48.8	52.3	54.5	
Sound power level	Max	dB(A)	61	64	67	
Dimensions	LxDxH	mm	1210x402x945			
Net weight		kg	92			

NOTE: The data contained above refer to the following standards: EN14511:2013; EN14825:2013; EN50564:2011; EN12102:2011; (EU)No:811:2013; (EU)No:813:2013; OJ 2014/C 207/02:2014.

HEATING



MONOBLOC R32



Single phase 12-14-16 kW
HCEWMS 1200 - 1400 - 1600 Z
 Three-phase 12-14-16 kW
HCVWMS 1202 - 1402 - 1602 Z

ENERGY EFFICIENCY CLASS
A++

In heating mode with **35°C** delivery water temperature.

ENERGY EFFICIENCY CLASS
A++

In heating mode with **55°C** delivery water temperature.

Model				HCEWMS 1200 Z	HCEWMS 1400 Z	HCEWMS 1600 Z	HCVWMS 1202 Z	HCVWMS 1402 Z	HCVWMS 1602 Z
Heating	Rated power	A7//W35	kW	12.30	14.10	16.30	12.30	14.10	16.30
	Electrical absorption			2.56	3.07	3.66	2.54	3.05	3.63
	Performance coefficient			4.80	4.59	4.45	4.84	4.62	4.49
	Rated power	A7//W45	kW	12.40	14.10	16.20	12.40	14.10	16.20
	Electrical absorption			3.52	4.06	4.72	3.45	3.99	4.70
	Performance coefficient			3.52	3.47	3.43	3.59	3.53	3.45
	Seasonal energy efficiency (ηs)	35/55		%	169/126	168/128	169/128	169/126	168/128
Energy efficiency class	35/55		-	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++	A++/A++
Cooling	Rated power	A35//W18	kW	12.20	14.00	15.50	12.20	14.00	15.50
	Electrical absorption			2.55	3.10	3.64	2.53	3.11	3.63
	Energy efficiency			4.78	4.52	4.26	4.82	4.50	4.27
	Rated power	A35//W7	kW	10.90	12.90	13.80	10.90	12.90	13.80
	Electrical absorption			3.74	4.64	5.21	3.72	4.62	5.19
	Energy efficiency			2.91	2.78	2.65	2.93	2.79	2.66
Operating limits	Outside air temperature	Heating	°C						
		Cooling		-25~-35	-25~-35	-25~-35	-25~-35	-25~-35	-25~-35
		DHW		-5~-46	-5~-46	-5~-46	-5~-46	-5~-46	-5~-46
	Delivery water temperature	Heating	°C						
		Cooling		25~60	25~60	25~60	25~60	25~60	25~60
		DHW		5~25	5~25	5~25	5~25	5~25	5~25
Refrigerant	Type (GWP)			R32 (675)			R32 (675)		
	Quantity (tons CO2)		kg (t)	2.8 (1.890)			2.8 (1.890)		
	Control system			Electronic expansion valve			Electronic expansion valve		
Type of compressor				Twin Rotary - DC Inverter			Twin Rotary - DC Inverter		
Internal circulator	Model			WILO Yonos PARA RS 25/7.5 RKC			WILO Yonos PARA RS 25/7.5 RKC		
Expansion tank	Volume		L	5			5		
	Pre-load		bar	1.5			1.5		
Hydraulic connections	Water inlet/outlet		Inches	1-1/4"M	1-1/4"M	1-1/4"M	1-1/4"M	1-1/4"M	1-1/4"M
Electrical data	Power		Ph-V-Hz	1ph-230V-50Hz			3ph-400V-50Hz		
	Maximum current		A	26.8			11		
	Power cable		type	3x6 mm ²			5x2.5 mm ²		
Control	Standard			Wire remote control			Wire remote control		
Sound pressure level at 1 m	Max		dB(A)	57.6	58	58.1	57.2	58.1	59
Sound power level	Max		dB(A)	68	71	71	68	71	71
Dimensions	LxDxH		mm	1404x405x1414			1404x405x1414		
Net weight			kg	158			172		

NOTE: The data contained above refer to the following standards: EN14511:2013; EN14825:2013; EN50564:2011; EN12102:2011; (EU)No:811:2013; (EU)No:813:2013; OJ 2014/C 207/02:2014.

HEATING



AIR-WATER CHILLER

MONOBLOC UNIT



Single phase 5-7 kW
HCWNMS 501-701 X



Single phase 10-12 kW
HCWNMS 1001-1201 X
Three-phase 12-14-16 kW
HCWSMS 1201-1401-1601 X

Mini Chiller monobloc with integrated hydronic module FULL DC Inverter

The Hokkaido Mini Chiller lets you cool and heat rooms by means of water terminals such as fan coils or radiant floors. High efficiency radiators can also be powered in heating.

The ultra compact design and the double control panel (on-board the unit or remote) make the Mini Chiller units systems that are easy to install and extremely functional.

Full DC Inverter compressor control and individual component optimisation guarantee the highest efficiency and energy savings.



DC Inverter
Twin Rotary
compressor



Air side heat
exchanger

EXV

EXV
electronic
expansion
valve



Fan



High efficiency
water
side heat
exchanger

Main features

Efficient

Low consumption and energy savings thanks to its integrated Full DC Inverter technology.

Ultra compact

The monobloc unit has a compact structure thanks to optimisation of the internal components, also containing the integrated hydronic group with the minimum dimensions.

Environmentally friendly

Mini Chiller uses the environmentally friendly R410A refrigerant, which does not damage the ozone.

Maximum comfort

The Inverter control allows units to rapidly reach the desired temperature, remaining constant and without annoying oscillations.

“Plug & play” solution


Installation is simple thanks to the integrated hydronic module, which includes electronic circulator, expansion tank, automatic vent valve and safety devices.

HEATING



AIR-WATER CHILLER

SYSTEM DIAGRAM

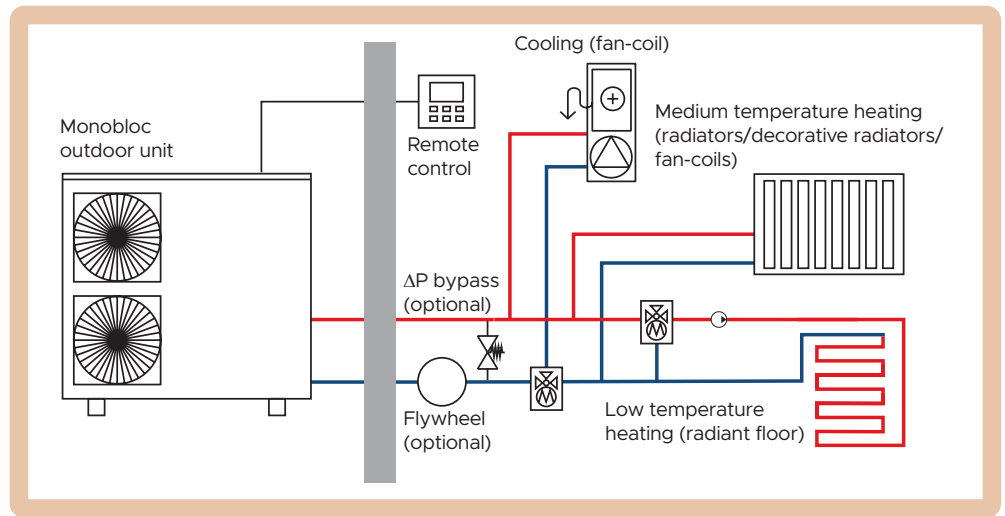

Model		HCWNMS 501 X	HCWNMS 701 X	HCWNMS 1001 X	HCWNMS 1201 X	HCWSMS 1201 X	HCWSMS 1401 X	HCWSMS 1601 X		
Cooling performance (Air temp. 35°C - Water temp. in/out 12°C/7°C)										
Refrigerant power	kW	5.00 (1.90~5.80)	7.00 (2.10~7.80)	10.00 (2.90~10.50)	11.20 (3.10~12.00)	11.20 (3.10~12.00)	12.50 (3.30~14.00)	14.50 (3.50~15.50)		
Power absorption	kW	1.55	2.25	2.95	3.50	3.50	3.90	4.68		
EER		3.23	3.11	3.39	3.20	3.31	3.20	3.10		
Cooling performance (Air temp. 35°C - Water temp. in/out 23°C/18°C)										
Refrigerant power	kW	5.60	8.00	10.60	12.20	12.20	14.20	15.60		
Power absorption	kW	1.15	1.85	2.50	2.65	2.60	3.10	3.60		
EER		4.87	4.32	4.24	4.60	4.70	4.58	4.33		
SEER		5.83	6.27	5.71	6.37	6.18	6.69	6.78		
Heating performance (T. air 7° C DB/6° C WB - T. water in/out 40° C/45° C)										
Heating capacity	kW	6.20 (2.10~7.00)	8.00 (2.30~9.00)	11.00 (3.20~12.00)	12.30 (3.30~13.20)	12.30 (3.30~13.20)	13.80 (3.50~15.40)	16.00 (3.70~17.00)		
Power absorption	kW	1.90	2.50	3.14	3.78	3.72	4.25	4.85		
COP		3.26	3.20	3.50	3.25	3.31	3.25	3.30		
Heating performance (T. air 7° C DB/6° C WB - T. water in/out 30° C/35° C)										
Heating capacity	kW	6.20	8.60	11.50	13.00	13.00	15.10	16.50		
Power absorption	kW	1.35	2.10	2.65	2.92	2.85	3.35	3.92		
COP		4.60	4.10	4.34	4.45	4.56	4.51	4.21		
SCOP		3.55	3.46	3.34	3.46	3.66	3.78	3.39		
Seasonal heating efficiency (ηs)	%	138.9	135.3	130.7	135.4	143.5	148.3	132.6		
Seasonal energy efficiency class		A+								
Operating limits	External air temperature	Cooling	°C						-5~46	
		Heating	°C						-15~27	
	Water temperature	Cooling	°C						4~20	
		Heating	°C						30~55	
Compressor	Type	Twin Rotary DC Inverter								
Refrigerant	Type	R410A								
	Load	kg	2.5	2.5	2.8	2.8	2.8	2.9	3.2	
Expansion valve	Type	Electronic								
Air side heat exchanger	Type	Finned coil with copper pipes and hydrophilic aluminium louvers								
Fan	Type	DC Brushless								
	Number	1	1	2	2	2	2	2		
	Air flow	m³/h	5.100	5.100	7.000	7.000	7.000	7.000	7.000	
Water side heat exchanger	Type	With brazed stainless steel plates								
	Volume	l	0.53	0.53	0.70	0.78	0.78	0.78	1.06	
	Water flow	m³/h	0.86	1.20	1.72	1.92	1.92	2.15	2.49	
	Load loss	kPa	15	15	18	18	18	18	19	
Circulator	Type	Electronic								
	Water flow	l/h	240	240	240	240	240	240	240	
	Pressure head	m	5.5	5.5	7.5	7.5	7.5	7.5	7.5	
Expansion tank	Volume	l	2	2	3	3	3	3	3	
	Pre-load	bar	1							
Maximum/minimum water pressure	bar	5/1.5								
Hydraulic connections	Water inlet/outlet	inches	1"	1"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	
	Power	V/Ph/Hz	220-240/1/50	220-240/1/50	220-240/1/50	220-240/1/50	380-415/3/50	380-415/3/50	380-415/3/50	
Electrical data	Maximum absorption	A	11.4	13.7	25.00	19.10	8.90	9.60	10.10	
	Absorbed	no. x mm²	3x2.50	3x2.50	3x4.00	3x4.00	5x3.00	5x3.00	5x3.00	
	Signal (shielded)	no. x mm²	3x0.75	3x0.75	3x0.75	3x0.75	3x0.75	3x0.75	3x0.75	
	Sound pressure level (*)	dB(A)	58	58	59	59	62	62	62	
Sound power level	dB(A)	63	66	68	68	68	70	72		
Dimensions	(LxDxH)	External	mm	990x354x966	990x354x966	970x400x1327	970x400x1327	970x400x1327	970x400x1327	970x400x1327
		Packaging	mm	1120x435x1100	1120x435x1100	1082x435x1456	1082x435x1456	1082x435x1456	1.082x435x1.456	1082x435x1456
		Weight	kg	81	81	110	110	110	110	111
Net		Gross	kg	91	91	121	121	121	122	122

(*) Sound pressure at 1 m distance in an open field.

The data contained above refers to the following standards: EN14511:2013; EN14825:2013; EN50564:2011; EN12102:2011; (EU)No:811:2013; (EU)No:813:2013; OJ 2014/C 207/02:2014.

HEATING



HP SPLIT FULL DC INVERTER

OUTDOOR UNITS



Single phase 6.10 kW
HCEMS 602 X



Single phase 8 kW
HCEMS 802 X



Single phase
10~12.10 kW
HCEMS 1002 - 1202 X

Three-phase 14~15.50 kW
HCVMS 1402 - 1602 X

INDOOR UNIT



Single phase
HHNMS 4-82 X
HHNMS 10-162 X

Three-phase
HHSMS 12-162 X

TANK



DHW UP TO 55° C WITHOUT ELECTRICAL INTEGRATION

Main features

6 power sizes: 6.10~8 kW and 10~12.10 kW (single phase); 14~15.50 kW (three-phase)

COP 4.73 (mod. 6.10 kW)

Class energy rating A++

Heating operation up to -20° C and +46° C in cooling

Why choose the HP SPLIT system

Energy saving

- Full DC Inverter technology.
- Energy Class A ++ in heating.
- Possible integration with solar thermal.

Easy installation

- Hydraulics integrated in the hydronic module.
- Split up to 50 m with 25 m difference in height between I.U. and O.U.
- Extremely compact outdoor unit.

Benefits and tax deductions

Solution suitable both for new constructions, as it is in a heat pump, and for renovations: it can be integrated with new or pre-existing boilers. Thermal Account 2.0; Tax deductions 65% (for the Italian market only).

Air-water heat pump for cooling, heating, domestic hot water

The new HP Split Hokkaido models guarantee maximum precision in temperature regulation, very high performance, in terms of energy efficiency.

The HP Split solution avoids the risk of freezing of external pipes in areas with cold temperatures.

It can also be connected to manage the control of additional heat generators such as: solar systems, gas or pellet boilers and supply tanks for DHW production.

Outdoor units

- Twin-Rotary DC Inverter compressor optimized for heating operation.
- The axial fans with DC Inverter motor allow better control of the treated air flow, lower consumption and reduced noise emissions.
- Electronic expansion valve for optimal regulation of the refrigerant flow in the circuit.
- Air side heat exchanger with internally corrugated copper pipes and aluminium louvres with increased surface area.

Indoor units


- Electronic circulator.
- Expansion tank.
- Vent valve, safety valve, flow switch and water pressure gauge.
- Supplementary electrical resistance.
- High efficiency water side heat exchanger, with stainless steel brazed plates.

HEATING



HP SPLIT FULL DC INVERTER

SYSTEM DIAGRAM

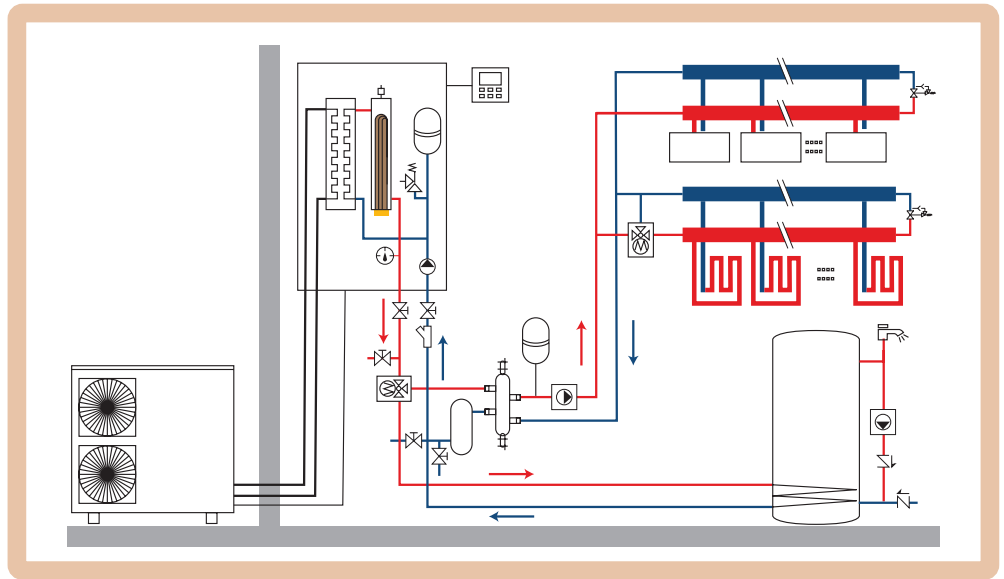

Size			6	8	10	12	14	16
Unit	Outdoor							
Models			HCEMS 602 X	HCEMS 802 X	HCEMS 1002 X	HCEMS 1202 X	HCVMS 1402 X	HCVMS 1602 X
Heating A7/W35 ¹	Supplied power	kW	6.10	8.00	10.00	12.10	14.00	15.50
	Power absorption	kW	1.29	1.73	2.17	2.74	3.26	3.79
	COP		4.73	4.62	4.61	4.42	4.29	4.09
Heating A7/W45 ²	Supplied power	kW	5.96	7.34	10.12	11.85	13.93	15.48
	Power absorption	kW	1.68	2.13	2.93	3.48	4.21	4.87
	COP		3.55	3.45	3.45	3.41	3.31	3.18
Cooling A35/W18 ³	Supplied power	kW	6.00	8.00	10.00	11.80	13.00	14.00
	Power absorption	kW	1.29	1.78	2.07	2.65	3.21	3.68
	EER		4.66	4.49	4.83	4.45	4.05	3.80
Cooling A35/W7 ⁴	Supplied power	kW	6.15	6.44	9.39	11.02	12.53	12.91
	Power absorption	kW	2.08	2.24	3.26	4.17	5.21	5.52
	EER		2.96	2.88	2.88	2.64	2.40	2.34
Seasonal energy efficiency class in heating			A++	A++	A++	A++	A++	A++
Outside temperature operating interval	Heating	°C	-20~35					
	DHW/		-20~43					
	Cooling		-5~46					
Power			1-220~240V-50HZ				3-380~415V-50HZ	
Protection switch flow			32				40	
Sound power level			66				68	
Compressor			Twin Rotary DC Inverter					
Refrigerant	Type/quantity	kg	R410A/2.5	R410A/2.8	R410A/3.9	R410A/3.9	R410A/4.2	R410A/4.2
Diameter of refrigerant piping on liquid/gas side			ø 9.52 (3/8") - ø 15.88 (5/8")					
Maximum splitting O.U. - I.U.			20					
Maximum height difference O.U./I.U./I.U. - O.U.			10/8					
Dimensions	L - D - H	mm	960 - 380 - 860	1075 - 395 - 965	900 - 400 - 1327	900 - 400 - 1327	900 - 400 - 1327	900 - 400 - 1327
Net weight/			60					
Isolation			-					
Unit	Indoor							
Models			HHNMS 4-82 X		HHNMS 10-162 X		HHSMS 12-162 X	
Delivery water temperature interval	Domestic Water	°C	40~55					
	Heating		25~55					
	Cooling		7~25					
Power			1-220~240V-50HZ				3-380~415V-50HZ	
Protection switch flow			A				32	
Integrative heating elements			kW				1.5 + 1.5	
Sound power level			dB(A)				43	
Expansion tank	Volume	L	3					
	Pre-load	bar	-					
Circulation pump	Type		DC Inverter centrifuge					
	Minimum water flow	L/h	660				960	
	Max pressure head	m	6				7.5	
Water/freon exchanger			-					
Minimum/maximum operating pressure			bar					
Hydraulic connection diameter			inches					
Dimensions	L - D - H	mm	400 - 427 - 865		400 - 427 - 865		400 - 427 - 865	
Net weight			kg		54		53	
Isolation			-					

1. Measurement conditions A7/W35: outdoor air temperature 7° C DB/6° C WB, delivery water temperature 35° C, return water temperature 30° C. 2. Measurement conditions A7/W45: outdoor air temperature 7° C DB/6° C WB, delivery water temperature 45° C, return water temperature 40° C. 3. Measurement conditions A35/W18: outdoor air temperature 35° C DB/24° C WB, delivery water temperature 18° C, return water temperature 23° C. 4. Measurement conditions A35/W7: external air temperature 35° C DB/24° C WB, delivery water temperature 7° C, return 12° C.

HEATING



HOT WATER

Water heater with heat pump 150 litre "In Room" monobloc series



ErP Ready




HWMGS 1150 A



Cold water inlet diffuser (with micro-holes to limit turbulence and water mixing)



Flat microchannel aluminium heat exchanger (greater contact surface with the tank and better heat exchange)



Further tube winding on the bottom of the "nest effect" tank (higher useful DHW volume)

Model	HWMGS 1150 A		
Tank volume	L	150	
Rated thermal power ¹	W	1500	
Rated power consumption ¹	W	429	
Rated hot water production capacity ¹	L/h	32	
COP (rated) ¹	W/W	3.50	
COP _{DHW2}	W/W	3.52	
Test cycle profile ²	-	L	
Volume of hot water at 40°C ²	L	161	
Energy Efficiency Class ³	-	A*	
IP Degree of protection	-	IPX4	
Hot water T. adjustment interval	°C	35~70 (55 default)	
Electrical data	Power	Ph-V-Hz	1-220~240-50
	Integrative heating element	W	1500
	Maximum absorption (including heating element)	W	2500
Refrigerant	Type (GWP)	-	R134a (1430)
	Quantity	kg	0.8
	Tons of CO2 equivalent	t	1.144
Compressor	-	-	Rotary ON/OFF
Dimensions	Unit Ø x H	mm	591 x 1685
Net weight	kg		74
Sound power level	dB(A)		60
Sound pressure level at 1 m	dB(A)		50
Tank	Tank material	-	Stainless steel
	DHW hydraulic connections	(" - DN)	1/2 - DN15
	Magnesium anode	-	3/4" - Ø21 x 400
	Maximum operating pressure	bar	7
Suctioned air	Operating range	°C	0~45
	Rated flow (not ducted)	m ³ /h	369
	Air flow (ducted)	m ³ /h	Not permitted
	Air duct - Diameter	mm	-
	Air duct - Length	m	-

1. Conditions: suctioned air 20° C DB(15° C WB), inlet water 15° C / outlet 55° C.
2. Test according to EN16147; air 20° C. 3. Directive 2009/125/EC - ERP EU no. 814/2013 (TUV Sud certification).
* Efficiency class A+ in accordance with the new 2017 ErP limits (effective from 26/09/2017).

Characteristics

Water heater with heat pump, monobloc on base

R134A | Refrigerant gas

150 litres | Stainless steel tank

60° C | Hot water with the compressor only

COP 3.52*

Anti-legionella cycle.

Multi-function control panel:

- clock, timer, night programming, absence and holiday programmes
- operating modes: standard, energy savings, fast operation, e-heater

* In accordance with EN 16147

Energy class




High efficiency: efficiency class A+ according to the new ErP 2017 limits (effective from 26/09/2017)

65%
Tax deductions
Energy redevelopment

THERMAL ACCOUNT 2.0

Hydraulic connections diagram

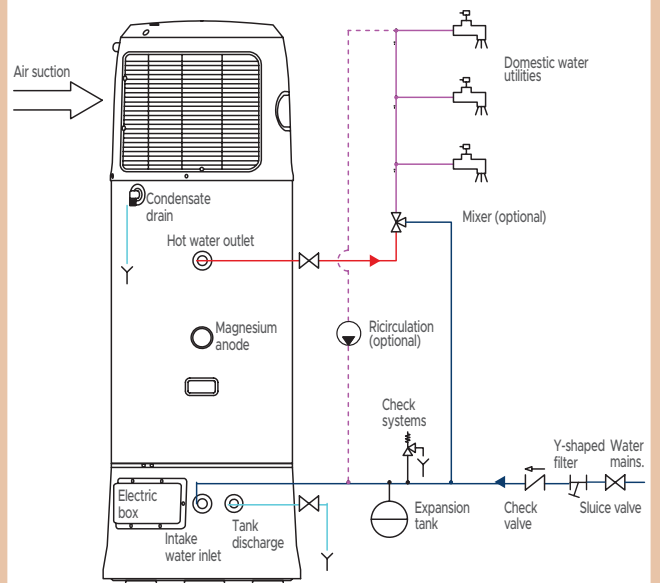

HEATING



HOT WATER

Water heater with heat pump
300/500 litre “Ducted” monobloc series
Possibility of integration with solar thermal



Certification EN 16147 from a third-party accredited laboratory BUREAU VERITAS.



Anti-legionella cycle

ErP Ready



HWMAS 3200 HEA-3
 HWMAS 5400 HEA-3

Characteristics

Water heater with heat pump, monobloc on base with the possibility of integration with solar thermal

R134A | Refrigerant gas

300 or 500 litres | Stainless steel tank

60° C | Hot water with the compressor only

COP 2.67* | For 300 litre model


COP 2.69* | For 500 litre model

Anti-legionella cycle | Can be customized for different needs or can be excluded


Innovative soft touch control panel to facilitate commissioning, use and maintenance

* In accordance with EN 16147

4 installation modes

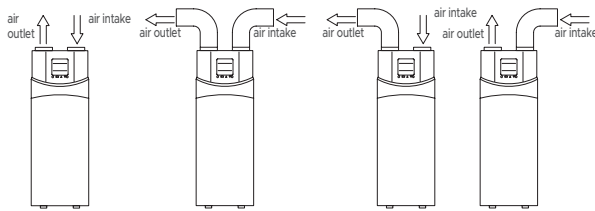

Energy class




65%
 Tax deductions
Energy redevelopment

THERMAL ACCOUNT 2.0

Model		HWMAS 3200 HEA-3	HWMAS 5400 HEA-3
Tank volume	L	300	500
Solar integration coil (stainless steel)	m ²	1.0	1.0
Rated thermal power ¹	W	1840	3700
Rated power consumption ¹	W	533	1093
Rated hot water production capacity ¹	L/h	45	85
COP (rated) ¹	W/W	3.45	3.39
COP _{hw} ²	W/W	2.67	2.69
Test cycle profile ²	-	XL	XXL
Volume of hot water at 40°C ²	L	351	501
Energy Efficiency Class ³	-	A	A
IP Degree of protection	-	IPX1	IPX1
Hot water T _i adjustment interval	°C	10~70 (50 default)	10~70 (50 default)
Maximum DHW temperature only compressor	°C	60	60
Electrical data	Power	Ph-V-Hz 1-220~240-50	1-220~240-50
	Integrative heating element	W	1600
	Maximum current (including heating element)	A	10.0
Refrigerant	Type (GWP)	-	R134a (1430)
	Quantity	kg	0.80
	Tons of CO2 equivalent	t	1.144
Compressor	-	Rotary (ON/OFF)	Rotary (ON/OFF)
Dimensions	Unit Ø x H	mm 640 x 1845	700 x 2230
Net weight	kg	104	122
Sound power level	dB(A)	59	60
Sound pressure level at 2 m	dB(A)	46	45
Tank	Tank material	-	Stainless steel
	DHW hydraulic connections	(“ - DN)	1” - DN25
	Hydraulic solar coil connections	(“ - DN)	3/4” - DN20
	Magnesium anode	-	G3/4” - Ø 21x300
	Maximum operating pressure	bar	10
Suctioned air	Operating range	°C	-5~+43
	Rated flow (not ducted)	m ³ /h	450(@0Pa)
	Air flow (ducted)	m ³ /h	400(@60Pa)
	Air duct - Diameter	mm	177
	Air duct - Length	m	6

Hydraulic connections diagram

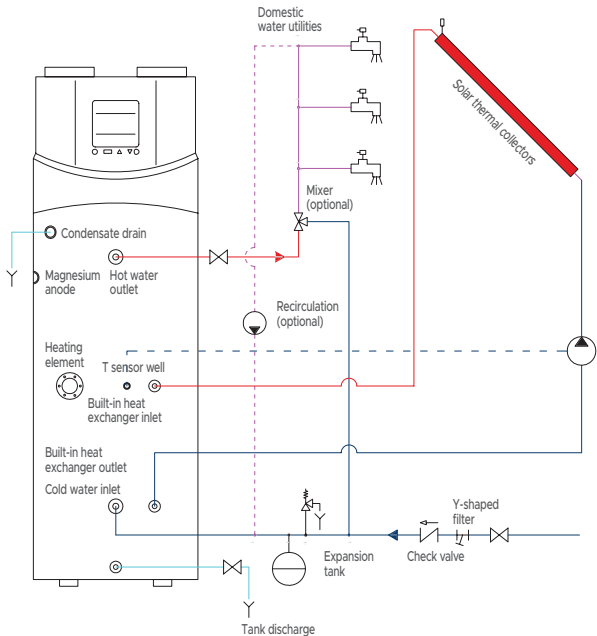

1. Conditions: suctioned air 20° C DB (15° C WB), inlet water 15° C / outlet 55° C.
 2. Test according to EN16147; air 7° C. 3. Directive 2009/125/EC - ERP EU no. 814/2013 (BUREAU VERITAS certification).