



SELECTED LINE





ACCURATE QUESTIONS, TIMELY ANSWERS



Attentive to customer **satisfaction** and ideas, Hokkaido identifies specific needs, responding in turn with dedicated ranges.

The **SELECTED LINE** in fact includes all those products meant to satisfy a series of diversified needs, which are difficult to be filled with products on the other lines.

For those who want to air-condition rooms but do not like outdoor units. For those who want to **dehumidify and cool** spaces but prefer portable solutions.

SELECTED LINE



Air conditioner without outdoor unit	76
Portable	79

SELECTED LINE




AIR-CONDITIONER WITHOUT OUTDOOR UNIT



INSIDE, the Inverter heat pump and on/off without outdoor unit, ideal for historic centres, makes it possible to cool in summer and heat in winter.

In one body: the classic outdoor and indoor unit are joined, normally divided into traditional air conditioners.

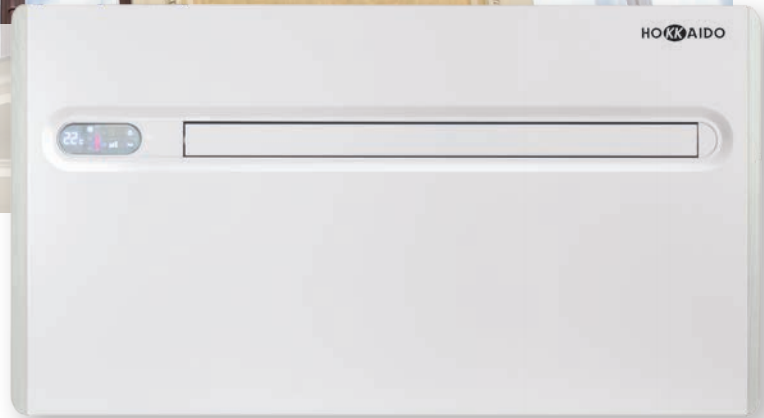

HTWIS 2350 X

HTWIS 1650 G



Adjustable air flow

INSIDE is characterised by clean, modern lines, is only 17 cm deep and can be installed both at the bottom and at the top on perimeter walls.

It is possible to adjust the orientation of the air outlet flap with a simple pressure on the appropriate button on the panel, on the machine.



No frost system for harsh winter climates

The condensate collection tray is constantly preheated, thus preventing the phenomenon of water freezing during winter operation.



Easy installation, reduced maintenance

Without an outdoor unit, it can be easily installed on any perimeter wall, even without the presence of a qualified refrigeration installer. Just make two holes of 162 mm in diameter in the wall without stretching the connection channel with outdoor units. If INSIDE should only work in heating mode, it can be installed without a condensate drain hose. In the absence of refrigeration pipes, maintenance is practically non-existent.



Silent operation


And who doesn't appreciate the pleasure of silence?

Thanks to the power adopted, the internal layout and the wise use of soundproofing materials, exceptional levels of silence have been achieved with INSIDE: it is really difficult to distinguish it from a normal split wall appliance. Because real well-being is being able to rest or sleep in a comfortable, noise-free environment.

SELECTED LINE



AIR-CONDITIONER WITHOUT OUTDOOR UNIT

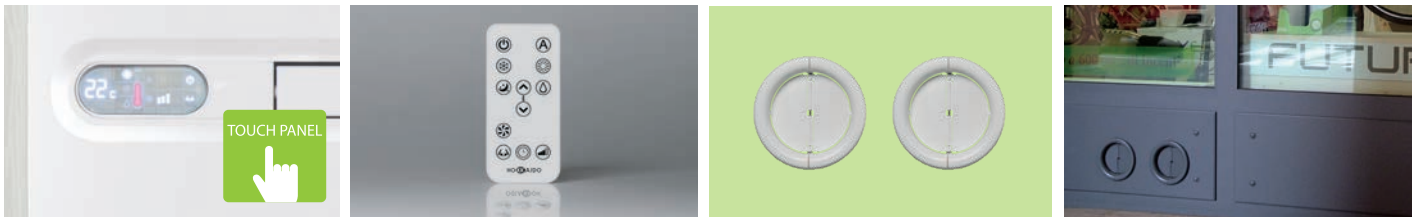

Remote and on-board control

INSIDE is provided as standard with a practical, functional remote control. In addition, the desired settings can also be set on the machine, from a convenient control panel from which the 'heating' function can be deactivated and LOCK activated to lock the keypad.

Ideal for historic centres with retractable outdoor grills

The external tilting grills open only when the machine is in operation; this reduces the entry of dust, noise and pollution, less maintenance, even less visibility to the outside. INSIDE can be installed anywhere. It is an ideal solution for buildings with particular architectural requirements, as the air conditioner can be installed even where city or condominium restrictions prevent the installation of traditional outdoor units. The outer grilles can be painted with the same colour as the façade to almost completely hide its installation.

Model		HTWIS 2350 X		HTWIS 1650 G	
Type		Monobloc double duct DC-Inverter heat pump		Monobloc double duct Heat pump On-Off	
Control		Panel + Remote control			
Rated capacity (T=+35°C)	Cooling	kW	2.35	1.65	
Rated capacity (OverFAN)* (T=+35°C)		kW	3.10	-	
Rated absorbed power		kW	0.730	0.580	
Annual energy consumption		kWh/a	365	290	
Seasonal energy efficiency class		626/2011 ¹	A+	A	
Rated energy efficiency coefficient		EER ²	3.22	2.84	
Rated capacity (T=+7°C)	Heating	kW	2.36	1.70	
Rated capacity (OverFAN)* (T=+7°C)		kW	3.05	-	
Rated absorbed power		kW	0.720	0.545	
Seasonal energy efficiency class (average season)		626/2011 ¹	A	A	
Rated energy efficiency coefficient		COP ²	3.28	3.12	
Operating limit (indoor environment)	Cooling	°C	18~32	18~32	
	Heating	°C	5~25	5~27	
Operating limit (outdoor environment)	Cooling	°C	-5~43	-5~43	
	Heating	°C	-10~18	-10~24	
Dehumidifying capacity		L/h	1.10	0.80	
Sound pressure level (Hi/Lo)		dB(A)	41-27	38-29	
Sound power level		dB(A)	58	53	
Electrical data					
Power		Ph/V/Hz	1 / 220~240 / 50		1 / 220~240 / 50
MAX absorbed current		A	3.4		3.0
Refrigerant circuit					
Refrigerant (GWP) ³			R410A (2088)		R410A (2088)
Quantity		Kg	0.62		0.48
Tons of CO2 equivalent			1.295		1.002
Fans					
Indoor fan speed		No.	3		3
Outdoor fan speed		No.	3		3
Air flow at Max indoor/outdoor speed		m³/h	400/480		360/430
Air flow at Medium indoor/outdoor speed		m³/h	320/390		300/360
Air flow at Minimum indoor/outdoor speed		m³/h	270/340		240/320
Installation					
Wall hole diameter		mm	162		162
Wall hole distance		mm	293		293
Specifications					
Dimensions	L x H x D	mm	1030 x 555 x 170		1030 x 555 x 170
Net weight		kg	41		46
Test conditions		Room temperature		Outdoor temperature	
Cooling checks		DB 27°C - WB 19°C		DB 35°C - WB 24°C	
Heating checks		DB 20°C - WB 15°C		DB 7°C - WB 6°C	

* With DUAL-POWER function on.

1 EU Delegated Regulation No.626/2011 on the new labelling indicating the energy consumption of air conditioners. 2 Value measured according to harmonised standard EN14511. 3 Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 2088. If 1 kg of this refrigerant fluid were released into the atmosphere, therefore, the impact on global warming would be 2088 times higher than 1 kg of CO2, over a period of 100 years. Under no circumstances should the user try to intervene on the refrigerant circuit or disassemble the product. Always contact qualified personnel if necessary.



SELECTED LINE



PORTABLE

For cooling, dehumidification, ventilation

HMCM 90 P

NEW

The Hokkaido portable monoblock immediately brings comfort to your home thanks to the better quality of the dehumidified and filtered air.

Very compact design

This portable unit is set apart for its practicality: it operates with a simple electrical connection. What's more, its compact design makes it ideal for even the smallest spaces. It is easy to move in any environment, thanks to the multi-directional wheels and the practical handles on the side.

Condensate management system

- In cooling mode with automatic vaporization: the condensate evaporates to the outside.
- In dehumidification mode with continuous drainage: the appropriate drain pipe is connected to one of the two outlets at the back.

Available functions

- Sleep: gradually increases the set temperature and guarantees reduced noise for greater well-being at night.
- Eco-design: during the stand-by phase, the machine automatically goes into power saving mode, consuming only 0.5 W.
- Auto-restart: if the unit disconnects, the previously set functions are restored.



Characteristics

Compact	On/Off timer to set the power off and on at the desired time
Easy filter cleaning	Sleep function
Double condensate water drain outlet	Auto-swing function
Built-in room temperature sensor	Floater included
Multi-directional wheels	

Model			HMCM 90 P
Power		Ph/V/Hz	1/220-240/50
Rated heating ¹	Cooling	W	2.60
Rated absorbed power ¹		W	1.00
Rated energy efficiency index ¹		W	2.60
Energy efficiency class		-	A
Sound pressure level (Hi-Lo)		dB(A)	51.9-46.9
Sound power level		dB(A)	63
Treated air flow		m ³ /h	295
Refrigerant	Type/qty.	kg	R290/0.17
Global warming potential	GWP	kg CO2 eq.	3
Tons of CO2 equivalent		kg	0.51
Dimensions	LxDxH	mm	355x345x703
Net weight		kg	25.3

1. Value measured according to harmonised standard EN1451: 35° C DB - 28.3° C WB.