

# RESIDENTIAL R32

## R32 MULTISPLIT

Ducted



HUCGM 260-350-530 Z



Wired remote control (standard)


### Main features:

Models available in 3 different power levels (2.50~5.00 kW).

Maximum compactness: only 200 mm in height.

Air filter.

Remote control and centraliser: optional.

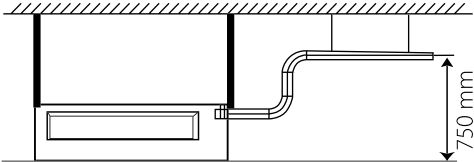

Condensate discharge drain pipe that allows outlet raising up to 750 mm from the flush panel.

Model			HUCGM 260 Z	HUCGM 350 Z	HUCGM 530 Z
Type			DC Inverter		
Rated power	Cooling	kW	2.50	3.50	5.00
	Heating	kW	2.80	3.85	5.50
Electrical data					
Power	Ph-V-Hz		1-220~240V-50HZ	1-220~240V-50HZ	1-220~240V-50HZ
	IU ~ OU		OU	OU	OU
Connection wires IU/ OU (not including earthing)		no.	3	3	3
<b>Refrigerant data</b>					
Pipe diameter	Liquid	mm (inch)	ø6.35(1/4")	ø6.35(1/4")	ø6.35(1/4")
	Gas	mm (inch)	ø9.52(3/8")	ø9.52(3/8")	ø12.74(1/2")
<b>Product specifications</b>					
Indoor unit	Dimensions (L x D x H)	mm	700x615x200	700x615x200	900x615x200
	Net weight	Kg	21	22	26
Sound level at 1 m (Hi/Lo)		dB(A)	37/31	39/32	41/33
Treated air (Hi/Mi/Lo)		m <sup>3</sup> /h	450/350/280	550/400/300	700/600/500
Available static pressure		Pa	10	10	10
Outside diameter of condensate drain		mm	31	31	31
Remote control (supplied)		type	Wired remote control and R.I. Remote control	Wired remote control and R.I. Remote control	Wired remote control and R.I. Remote control
<b>Optional parts</b>			DTC GTX		
Centralised Control					