


HTFU XRV-P

8-ways compact cassette 60x60

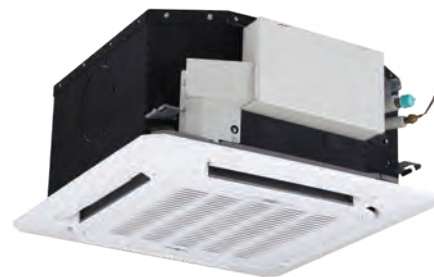

Ultra-compact design

22 dB(A) (2.20~2.80 kW) |
Extremely quiet

Condensate drain pump with possibility
of raising the discharge up to 500 mm
from the lower height

360° air diffusion

**The control must be purchased
as an accessory**

Model			HTFU 225 XRV-P	HTFU 285 XRV-P	HTFU 365 XRV-P	HTFU 455 XRV-P
Rated capacity	Cooling	kW	2.20	2.80	3.60	4.50
	Heating	kW	2.40	3.20	4.00	5.00
Electrical data						
Power supply		Ph-V-Hz	1-220~240V-50Hz			
Electrical absorption		W	35	35	40	50
Product Specifications						
Dimensions	LxHxD	mm	630x260x570			
Net weight		Kg	18		19.2	
Sound power level ¹	Max~Min	dB(A)	51~38		56~43	
Sound pressure level at 1.4 m ¹	Max~Min	dB(A)	35~22		41~28	
Treated air volume ¹	Max~Min	m³/h	576~405		604~400	
Refrigerant connections	Liquid/Gas	mm (inch)	6.35 (1/4") / 12.7 (1/2")			
	Condensate drain	mm	32			
Accessories						
Decorative panel			TFP 155 XRV-P			
Dimensions	LxHxD	mm	647x50x647			
Net weight		Kg	2.5			
Remote control			DHIR-5-6-XRV-K-P			
Wired remote control			DHW-5-6-XRV-P			
Optional parts						
Centralized control			DHC-8-64-XRV-P			

1. Values related to Max and Min speed of 7 levels settable by remote control.

HTBU XRV-P

8-ways cassette 84x84



Optimised fan design to
attenuate air resistance and
reduce noise level

**Pre-set for the
connection of an outside
air intake channel**

Condensate drain pump
with possibility of raising the
discharge up to 750 mm from
the lower height

**The control must
be purchased as an
accessory**

Model			HTBU 565 XRV-P	HTBU 715 XRV-P	HTBU 905 XRV-P	HTBU 1125 XRV-P	HTBU 1405 XRV-P
Rated capacity	Cooling	kW	5.60	7.10	9.00	11.20	14.00
	Heating	kW	6.30	8.00	10.00	12.50	16.00
Electrical data							
Power supply		Ph-V-Hz	1-220~240V-50Hz				
Electrical absorption		W	31	46	75	94	
Product Specifications							
Dimensions	LxHxD	mm	840x230x840			840x300x840	
Net weight		Kg	23.2			28.4	30.7
Sound power level ¹	Max~Min	dB(A)	56~47	58~47	61~50	64~52	
Sound pressure level at 1.4 m ¹	Max~Min	dB(A)	43~34	45~34	47~36	50~38	
Treated air volume ¹	Max~Min	m³/h	1029~704	1200~748	1596~1034	1727~1224	
Refrigerant connections	Liquid/Gas	mm (inch)	9.52 (3/8") / 15.9 (5/8")				
	Condensate drain	mm	32				
Accessories							
Decorative panel			TBP 712 IHXR				
Dimensions	LxHxD	mm	950x70x950				
Net weight		Kg	5.8				
Remote control			DHIR-5-6-XRV-K-P				
Wired remote control			DHW-5-6-XRV-P				
Optional parts							
Centralized control			DHC-8-64-XRV-P				

1. Values related to Max and Min speed of 7 levels settable by remote control.