

.....

# MULTISPLIT INDOOR UNITS

Compact cassette 60x60 HTFU 351-531 ZAL



**8-way TFP 200 ZA** panel with 360° air diffusion  
Pre-set for outside air inlet

Condensate drain pump included, with possibility of raising the discharge up to 750 mm from the lower height


Remote control included as standard



Model			HTFU 351 ZAL	HTFU 531 ZAL
<b>Type</b>			Cassette indoor unit	
Control (included)			Remote control	
Rated capacity	Cooling	kW	3.50	5.30
	Heating	kW	4.10	5.40
<b>Electrical data</b>				
Power supply	Outdoor unit	Ph-V-Hz	1-220~240V-50Hz	
Connection wires between I.U. and O.U.		no.	4	4
<b>Refrigerant circuit</b>				
Diameter of refrigerant piping on liquid/gas	mm (inches)		6.35(1/4") / 9.52(3/8")	6.35(1/4") / 12.74(1/2")
<b>Product specifications</b>				
Dimensions	LxDxH	mm	570x570x260	570x570x260
Net weight		Kg	16.3	16.5
Sound power level	Hi	dB(A)	56	57
Sound pressure level	Hi/Mi/Lo/ULo	dB(A)	41/36/33/25.5	43/39.5/35.5/29
Treated air volume	Hi/Mi/Lo	m³/h	620/510/420	720/620/500
<b>Accessories</b>				
Decorative panel	TFP 200 ZA			
<b>Optional parts</b>				
Wi-Fi module	On demand			
Wired control	DHW-WT-ZA			
Centralized control	DTC IHXR TOUCH / DTCWT IHXR			
Wi-Fi centralized control	XRV Mobile BMS			

# MULTISPLIT INDOOR UNITS

Medium static pressure ducted HUCU 351-531 ZAL

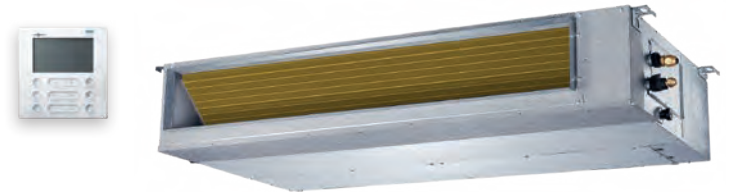

Compatible with systems **AIRZONE**  
Condensate drain pump included with possibility of raising the discharge up to 750 mm from the lower height

**100 Pa** | Automatic adjustment of the static pressure of the fan at constant flow rate

**Wired remote control included**



Model			HUCU 351 ZAL	HUCU 531 ZAL
<b>Type</b>			Ducted type indoor unit	
Control (included)			Wired remote control	
Rated capacity	Cooling	kW	3.50	5.30
	Heating	kW	3.80	5.60
<b>Electrical data</b>				
Power supply	Outdoor unit	Ph-V-Hz	1-220~240V-50Hz	
Connection wires between I.U. and O.U.		no.	4	4
<b>Refrigerant circuit</b>				
Diameter of refrigerant piping on liquid/gas	mm (pollici)		6.35(1/4") / 9.52(3/8")	6.35(1/4") / 12.74(1/2")
<b>Product specifications</b>				
Dimensions	LxDxH	mm	700x506x200	880x674x210
Net weight		Kg	17.8	24.4
Sound power level	Hi	dB(A)	57	58
Sound pressure level	Hi/Mi/Lo/ULo	dB(A)	34.5/30.5/29/23	41/38/34/26
Treated air volume	Hi/Mi/Lo	m³/h	600/480/300	911/706.3/515.2
Fan static pressure	Std/Max	Pa	25/60	25/100
<b>Optional parts</b>				
Wi-Fi module	On demand			
Centralized control	DTC IHXR TOUCH / DTCWT IHXR			
Wi-Fi centralized control	XRV Mobile BMS			