

LUMINA

A++ in cooling A+ in heating

50°C

wide maximum operation in cooling



EFFECTIVE AGAINST VIRUSES
AND BACTERIA



-99.9%

Influenza virus,
HFMD, Escherichia
coli, Staphylococcus
aureus.

SMART
MANAGEMENT
WITH WIFI




WIFI
INCLUDED



HEAT EXCHANGER TREATED WITH
ANTI-CORROSION COATING



PCB
OF THE
OUTDOOR
UNIT
COOLED BY
REFRIGERANT

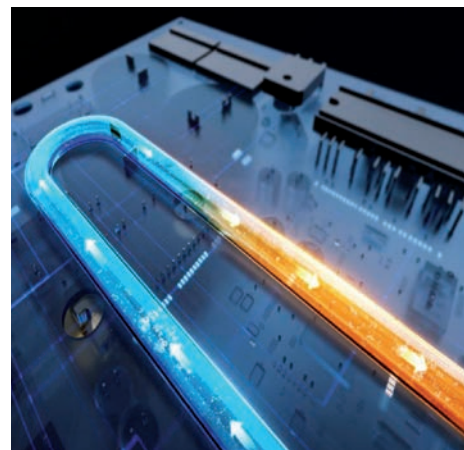

WALL HKEDS 260-350-530-710 ZA

Wi-Fi
includedRemote control
included

15~50°C in cooling
15~30°C in heating

Auto restart
8°C function

I-Feel

Indoor unit model			HKEDS 260 ZA	HKEDS 350 ZA	HKEDS 530 ZA	HKEDS 710 ZA
Outdoor unit model			HCNDS 260 ZA	HCNDS 350 ZA	HCNDS 530 ZA	HCNDS 710 ZA
Type			DC-Inverter heat pump			
Control (supplied)			Remote control			
Wi-Fi module			Integrated			
Nominal data						
Nominal capacity (T=+35°C)	Cooling	kW	2.60 (0.60~3.10)	3.50 (0.80~4.10)	5.30 (1.30~5.70)	7.30 (1.80~7.40)
Nominal absorbed power (T=+35°C)		kW	0.80 (0.10~1.60)	1.08 (0.10~1.60)	1.63 (0.29~2.10)	2.20 (0.23~2.70)
Nominal energy efficiency coefficient		EER ¹	3.25	3.24	3.25	3.32
Nominal capacity (T=+7°C)	Heating	kW	2.61 (0.80~3.40)	3.80 (1.00~4.20)	5.30 (1.30~5.50)	7.30 (1.80~7.40)
Nominal absorbed power (T=+7°C)		kW	0.70 (0.30~1.50)	1.02 (0.30~1.60)	1.42 (0.25~1.80)	1.96 (0.23~2.53)
Nominal energy performance coefficient		COP ¹	3.73	3.73	3.73	3.72
Seasonal data						
Theoretical load (Pdesignc)	Cooling	kW	2.60	3.50	5.30	6.70
Seasonal energy efficiency index		SEER ²	6.10	7.00	6.80	6.90
Seasonal energy efficiency class		626/2011 ³	A++	A++	A++	A++
Annual energy consumption	Heating (average weather conditions)	kWh/y	150	173	273	340
Theoretical load (Pdesignh) @ -10°C		kW	2.10	2.70	4.00	5.30
Seasonal energy efficiency index		SCOP ²	4.00	4.10	4.00	4.20
Seasonal energy efficiency class		626/2011 ³	A+	A+	A+	A+
Annual energy consumption		kWh/y	735	922	1400	1766
Electrical data						
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz			
Power cable		Type	3 x 2.5 mm ²		3 x 4 mm ²	
Wiring between I.U. and O.U.		no.	5	5	5	5
Nominal absorbed electric current	Cooling	A	3.70 (0.60~8.50)	4.80 (0.70~7.80)	7.80 (2.20~9.30)	10.00 (1.00~12.00)
	Heating	A	3.30 (0.20~8.50)	4.60 (1.50~8.00)	6.50 (2.00~8.00)	9.00 (1.00~11.00)
Max current		A	8.50	9.50	12.00	16.00
Max absorbed power		kW	1.60	1.90	2.50	3.40
Refrigerant circuit data						
Refrigerant ⁴		Type (GWP)	R32 (675)			
Q.ty of refrigerant pre-charge		Kg	0.46	0.60	0.85	1.30
Tons of CO2 equivalent		t	0.311	0.405	0.574	0.878
Liquid/gas refrigerant pipe diameter		mm (inches)	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 12.74(1/2")	6.35(1/4") / 15.88(5/8")
Max split length		m	20	20	20	25
Max difference in height U.I./U.E.		m	10	10	10	15
Split length without additional charge		m	5	5	5	5
Additional charge		g/m	20	20	30	30
Indoor unit specifications						
Dimensions	LxDxH	mm	716x193x285	768x201x299	917x218x318	1140x230x332
Net weight		Kg	7	8	10	13
Sound power level	Hi	dB(A)	52	53	59	62
Sound pressure level	S/H/M/L/Silence	dB(A)	39/35/32/31/21	40/36/33/32/22	46/41/38/36/25	49/44/41/39/27
Treated air volume (Hi/Me/Lo)	Cooling	m³/h	500/430/380	650/570/515	950/830/750	1300/1150/1020
	Heating		550/500/420	650/600/530	950/870/760	1250/1150/1020
Outdoor unit specifications						
Dimensions	LxDxH	mm	650x233x455	708x258x530	785x300x555	890x319x695
Net weight		Kg	18.5	22	27	39
Sound power level		dB(A)	59	62	62	64
Sound pressure level		dB(A)	44	44	44	46
Treated air volume		m³/h	1800	1800	2800	3600
Operating limits (outdoor temperature)	Cooling	°C	15~50			
	Heating	°C	-15~30			

1. Value measured according to the harmonised standard EN14511. 2. EU Regulation No. 206/2012 - Value measured according to the harmonised standard EN14825. 3. EU Delegated Regulation No. 626/2011 on the new energy consumption labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. Therefore, if 1 kg of this refrigerant were released into the atmosphere, the impact on global warming would be 675 times higher than 1 kg of CO₂ over a period of 100 years. Under no circumstances should the user attempt to intervene on the refrigerant circuit or disassemble the product. In case of need, always contact qualified personnel.