

LUMINA MULTI

MULTISPLIT INDOOR UNITS

Wall HKEDM 203-263-353-533 ZL



-10-52°C in cooling
-15-24°C in heating

Auto restart
8°C function

I-Feel

Model			HKEDM 203 ZL	HKEDM 263 ZL	HKEDM 353 ZL	HKEDM 533 ZL
Type			Wall type indoor unit			
Control (supplied)			Remote control			
Wi-Fi module			Integrated			
Nominal data						
Nominal capacity	Cooling	kW	2.10	2.60	3.50	5.30
Nominal capacity	Heating	kW	2.40	2.90	3.80	5.40
Electrical data						
Power supply	Outdoor unit	Ph-V-Hz	1Ph - 220/240V - 50Hz			
Wiring between I.U. and O.U.		no.	4	4	4	4
Refrigerant circuit data						
Liquid/gas refrigerant pipe diameter		mm (inches)	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 9.52(3/8")	6.35(1/4") / 12.74(1/2")
Product specifications						
Dimensions	LxDxH	mm	768x201x299	768x201x299	768x201x299	997x222x312
Net weight		Kg	7	7	7.5	11
Sound power level	(Turbo/Hi/Mi/Lo/Silence)	dB(A)	57/50/46/42/33	57/50/46/42/33	57/50/46/42/33	60/52/47/43/35
Sound pressure level	(Turbo/Hi/Mi/Lo/Silence)	dB(A)	43/41/38/35/26	43/41/38/35/26	43/41/38/35/26	47/44/39/36/28
Treated air volume	(Turbo/Hi/Mi/Lo/Silence)	m³/h	650/570/520/470/350	650/570/520/470/350	650/570/520/470/350	950/830/750/660/480

EFFECTIVE AGAINST VIRUSES AND BACTERIA



-99.9%

Influenza virus,
HFMD, Escherichia
coli, Staphylococcus
aureus.


SMART MANAGEMENT WITH WIFI



WIFI INCLUDED



HEAT EXCHANGER TREATED WITH ANTI-CORROSION COATING

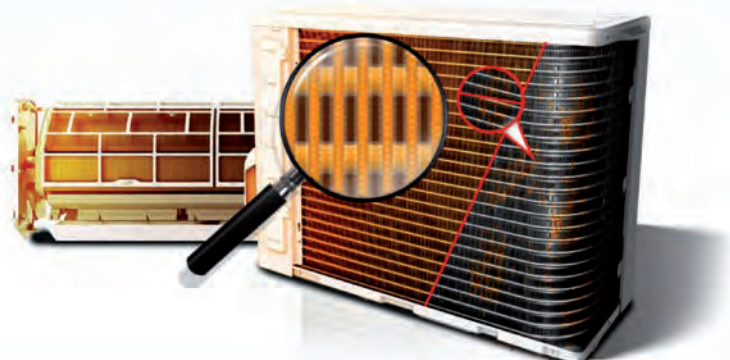

PCB OF THE OUTDOOR UNIT COOLED BY REFRIGERANT

