

RESIDENTIAL AND COMMERCIAL R32

.....

V-DESIGN DC INVERTER MULTISPLIT INTERNAL UNITS

NEW

Wall HKEU 262-352 ZAL-B Dark silver




Standard remote control with built-in temperature sensor (Follow me function)

Model	HKEU 262 ZAL-B		HKEU 352 ZAL-B	
Type	Indoor wall unit			
Control (included)	Remote control			
Rated heating	Cooling	kW	2.60	3.50
	Heating	kW	2.90	3.80
Electrical data				
Power	Ph-V-Hz	-	-	
Connection wires between I.U. and O.U.	no.	4	4	
Refrigerant circuit				
Diameter of refrigerant piping on liquid/gas	mm (inches)	ø6.35(1/4") - ø9.52(3/8")		ø6.35(1/4") - ø9.52(3/8")
Product specifications				
Dimensions	LxDxH	mm	897x182x312	897x182x312
Net weight		Kg	9.9	9.9
Sound pressure level	Hi/Mi/Lo	dB(A)	37.5/26/21	37.5/26/21
	Hi	dB(A)	50	50
Treated air (High / Med. / Low)	m ³ /h	530/421/305	530/421/305	
Motor power (Output)	W	20	20	
Optional parts				
Wi-Fi module			HKM-WiFi	
Wired remote control			NO	
Centralised control			NO	

TOP CLASS DC INVERTER MULTISPLIT INTERNAL UNITS

Wall HKEU 264-354 ZAL

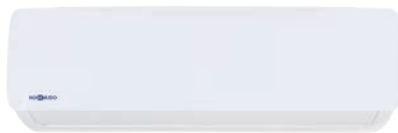

Standard remote control with built-in temperature sensor (Follow me function)

Model	HKEU 264 ZAL		HKEU 354 ZAL	
Type	Indoor wall unit			
Control (included)	Remote control			
Rated heating	Cooling	kW	2.60	3.50
	Heating	kW	2.80	3.80
Electrical data				
Power	Ph-V-Hz	-	-	
Connection wires between I.U. and O.U.	no.	4	4	
Refrigerant circuit				
Diameter of refrigerant piping on liquid/gas	mm (inches)	ø6.35(1/4") - ø9.52(3/8")		ø6.35(1/4") - ø9.52(3/8")
Product specifications				
Dimensions	LxDxH	mm	802x189x297	802x189x297
Net weight		Kg	8.5	8.5
Sound pressure level	Hi/Mi/Lo/ULo	dB(A)	42/35/25/21.5	42/35/25/22
	Hi	dB(A)	56	56
Treated air (High / Med. / Low)	m ³ /h	611/479/360	611/479/360	
Motor power (Output)	W	50	50	
Optional parts				
Wi-Fi module			HKM-WiFi	
Wired remote control			NO	
Centralised control			NO	